

Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical specification

Output specifications


Analog output

No. of channels	1
Output type	Voltage (0-10V) / Current (0-20mA)
Resolution	10mV / 2mA
Digital resolution	12 bits
Conversion time	10ms

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

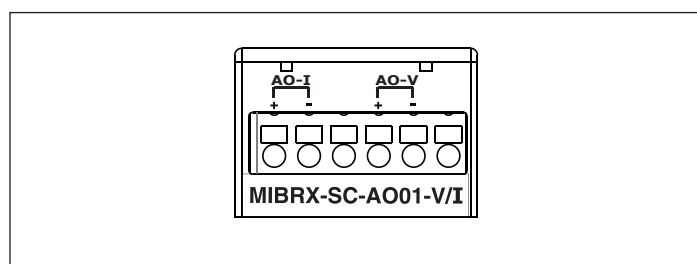

Ordering information

Product code	Description	Certification
MIBRX-SC-AO01-V/I	MiBRX Slot Card - 1 Analog output	CE RoHS compliant