



Features :

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP FLEX 2M
- Configured via selpro software
- Spring type pluggable terminals


Electrical specifications

| | |
|---------------------------------|---|
| No. of channels | 4 Channels |
| Output range | 0-10V DC |
| Digital resolution | 0.0 to 100.0% = 0 to 10 volt |
| Input Impedance in signal range | $\geq 1k\Omega$ |
| Accuracy | $\pm 0.25\%$ of full scale |
| Non linearity | $\pm 0.25\%$ of full scale |
| Conversion time | 100ms |
| Short circuit protection | Voltage output has short circuit protection but the long period of short circuit may cause internal wire damage |

General specifications

| | |
|-------------------------------|---------------|
| Ambient operating temperature | 0°C to 55°C |
| Humidity | 95% |
| Ambient storage temperature | -20°C to 70°C |
| Weight | 40gms |

Terminal diagram

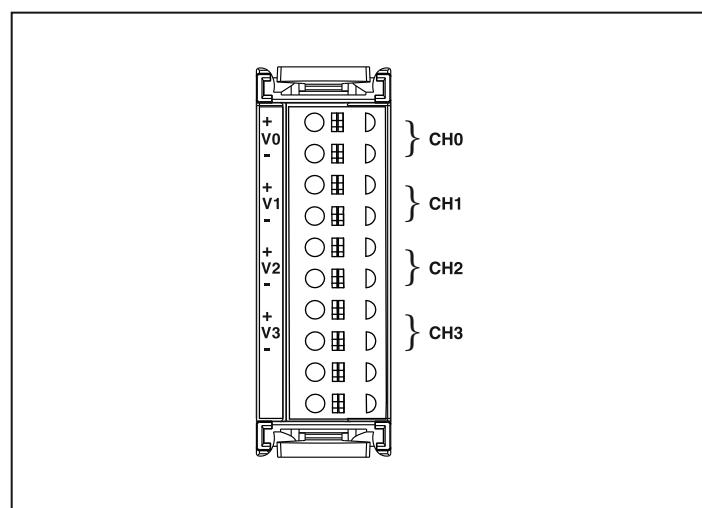

Ordering information

| Product code | Description | Certification |
|----------------------|--|---------------|
| FL-SC-AO04-V-CE-RoHS | 4 Channel analog output card - Voltage | CE RoHS |