
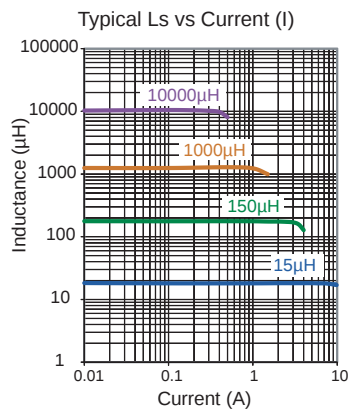
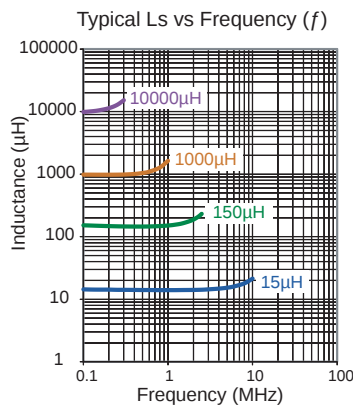




PISTHV

For High Voltages up to 400V DC



Part No	Inductance L (μ H)	f_L (kHz)	Tol $\pm$ (%)	SRF min (MHz)	DCR max (Ω)	Rated DC Current (A) I_{sat} $I_{\Delta T=40^\circ C}$	
PISTHV-150M-04	15	100kHz, 0.1V	20	11.35	0.034	7.85	4.90
PISTHV-820M-04	82	100kHz, 0.1V	20	4.09	0.104	3.95	2.50
PISTHV-151M-04	150	100kHz, 0.1V	20	4.00	0.200	2.87	1.90
PISTHV-301M-04	300	100kHz, 0.1V	20	2.00	0.390	2.10	1.20
PISTHV-331M-04	330	100kHz, 0.1V	20	2.00	0.450	1.85	1.20
PISTHV-471M-04	470	100kHz, 0.1V	20	1.65	0.650	1.40	0.90
PISTHV-681M-04	680	100kHz, 0.1V	20	1.35	0.770	1.40	0.80
PISTHV-102M-04	1000	100kHz, 0.1V	20	1.20	1.200	1.17	0.65
PISTHV-472M-04	4700	100kHz, 0.1V	20	0.55	5.200	0.65	0.30
PISTHV-602M-04	6000	100kHz, 0.1V	20	0.48	6.700	0.60	0.26
PISTHV-802M-04	8000	100kHz, 0.1V	20	0.41	8.640	0.56	0.24
PISTHV-103M-04	10000	100kHz, 0.1V	20	0.40	10.50	0.39	0.21

Core Material : Ferrite

Base Material : Plastic

Revision date : 25 Aug 2020

SPQ : Taped / Reel 200 [-04]

Remarks :

I_{sat} & $I_{\Delta T}$ - see description in Inductors Technical Data.

Terminal clip with lead-free tinned surface for SMT-Reflow soldering.