



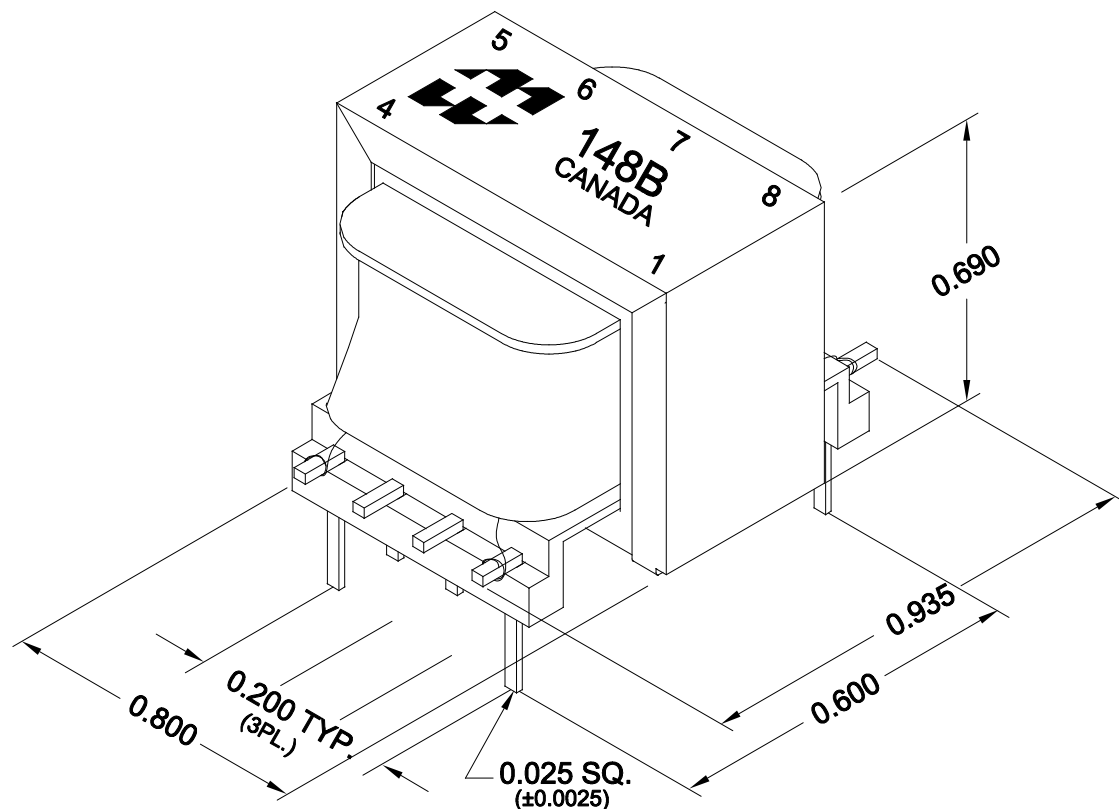

TOLERANCE, WHEN NOT STATED: ± 0.031

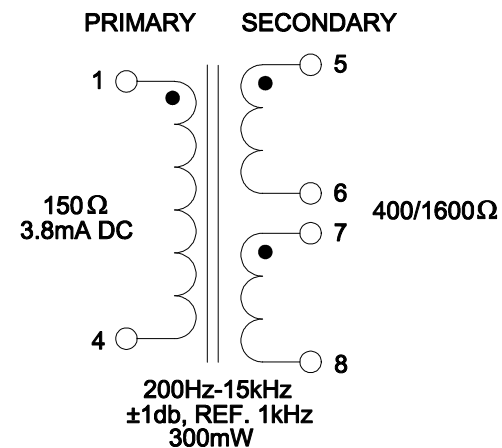

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 6.7V, 200Hz, PIN 1 - PIN 4	11mA Max.
Sec. N.L.V	@ 6.7V, 200Hz, PIN 1 - PIN 4	
	PIN 5 - PIN 6 =	10.93V $\pm 2\%$
	PIN 7 - PIN 8 =	10.93V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 4 =	11.30 Ω $\pm 15\%$
	@ 20°C, PIN 5 - PIN 6 =	100.0 Ω $\pm 15\%$
	@ 20°C, PIN 7 - PIN 8 =	100.0 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	250V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 03/30/17	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE:	DWG. NO.
			DATE: 03/30/17	APP'D. BY:	P.C. BOARD MOUNT	148B
				DIMENSIONS: IN(X) MM()	AUDIO TRANSFORMER	

PH # (519) 886-6181
FAX # (519) 886-9540