
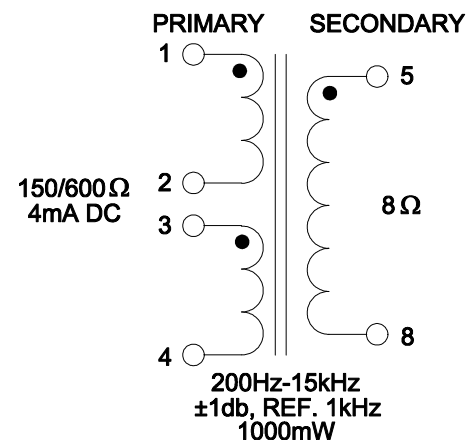


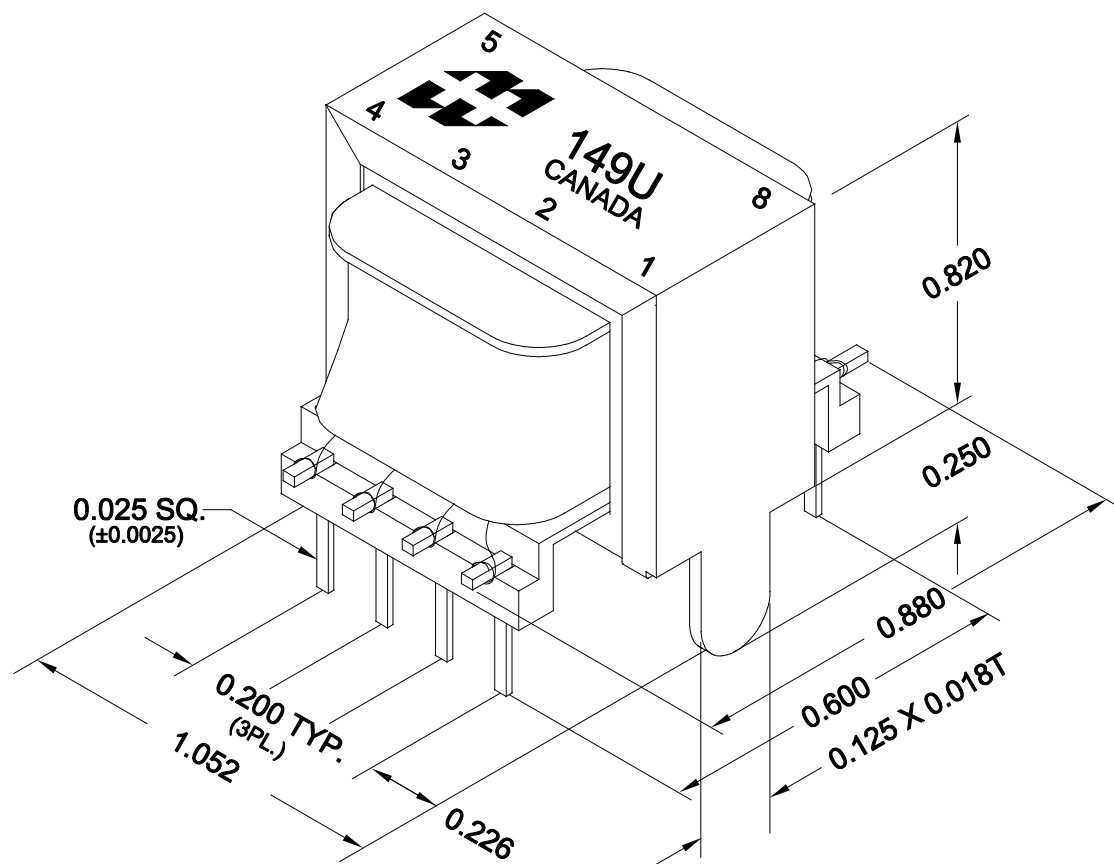

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 12.25V, 200Hz, PIN 1 - PIN 2	8.4mA	Max.
Sec. N.L.V	@ 12.25V, 200Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	12.25V	±2%
	PIN 5 - PIN 8 =	2.807V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	25.58 Ω	±15%
	@ 20°C, PIN 3 - PIN 4 =	25.58 Ω	±15%
	@ 20°C, PIN 5 - PIN 8 =	1.012 Ω	±15%
HIPOT	PRIMARY - SECONDARY	500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 09/10/18	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: P.C. BOARD MOUNT AUDIO TRANSFORMER	DWG. NO. 149U
			DATE: 09/10/18	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540