

HE1H



Dimensions & Weight

Pitch Spacing	8 mm
Weight per piece (12 pole)	17.2 g

Technical Data/Ratings

Approvals		
Wire Size (solid / stranded)	24-12 AWG	1-2.5 mm ²
Voltage Rating	600 V	500 V
Current Rating	20 A	6 A
Torque	4.4 lb-in	0.35 Nm
Insulation Material	Polyamide 66/6 V0	
Insert Material	Tinned Brass	
Screw Material	Blue Chromated Steel	

Installation Instructions

Wire Stripping Length	5 mm
Mounting Hole Diameter	3.0 mm
Terminal Screw Size	M2.6

Terminal Strips

	Cat. No.	Cat. No.	Length	Std. Pk.
2 pole	HE1HWPR/02	HE1HWPR/02/BK	13.2 mm	100
3 pole	HE1HWPR/03	HE1HWPR/03/BK	21.2 mm	100
4 pole	HE1HWPR/04	HE1HWPR/04/BK	29.2 mm	100
5 pole	HE1HWPR/05	HE1HWPR/05/BK	37.2 mm	100
6 pole	HE1HWPR/06	HE1HWPR/06/BK	45.2 mm	50
7 pole	HE1HWPR/07	HE1HWPR/07/BK	53.2 mm	50
8 pole	HE1HWPR/08	HE1HWPR/08/BK	61.2 mm	50
9 pole	HE1HWPR/09	HE1HWPR/09/BK	69.2 mm	50
10 pole	HE1HWPR/10	HE1HWPR/10/BK	77.2 mm	50
11 pole	HE1HWPR/11	HE1HWPR/11/BK	85.2 mm	50
12 pole	HE1HWPR/12	HE1HWPR/12/BK	93.2 mm	50

Accessories

	Cat. No.	Std. Pk.
External Jumpers		
2 pole	HCL8-2	100
3 pole	HCL8-3	100
4 pole	HCL8-4	100
12 pole	HCL8-12	25

HIGHLIGHTS


FEATURES

- 600V up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white

APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

HE1H DIMENSIONS

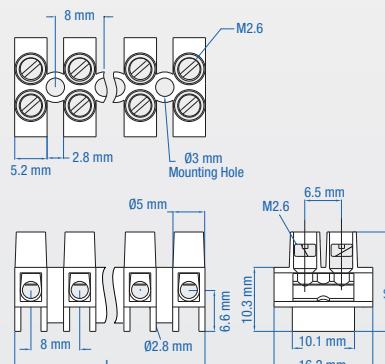

(All dimensions are shown in mm, to convert to inches please divide by 25.4)

HE4HN



HIGHLIGHTS

FEATURES

- 600V up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white

APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

Dimensions & Weight

Pitch Spacing	10 mm
Weight per piece (12 pole)	33.0 g

Technical Data/Ratings

Approvals	CE (F)	UL E211022	IEC 60998-2-1
Wire Size (solid / stranded)	24-10 AWG	2.5-4 mm ²	
Voltage Rating	600 V	500 V	
Current Rating	30 A	10 A	
Torque	7.0 lb-in	0.4 Nm	
Insulation Material	Polyamide 66/6 V0		
Insert Material	Tinned Brass		
Screw Material	Blue Chromated Steel		

Installation Instructions

Wire Stripping Length	6 mm
Mounting Hole Diameter	3.6 mm
Terminal Screw Size	M3


Terminal Strips

	Cat. No. □	Cat. No. ■	Length	Std. Pk.
2 pole	HE4HNWPR/02	HE4HNWPR/02/BK	16.4 mm	100
3 pole	HE4HNWPR/03	HE4HNWPR/03/BK	26.4 mm	100
4 pole	HE4HNWPR/04	HE4HNWPR/04/BK	36.4 mm	100
5 pole	HE4HNWPR/05	HE4HNWPR/05/BK	46.4 mm	100
6 pole	HE4HNWPR/06	HE4HNWPR/06/BK	56.4 mm	50
7 pole	HE4HNWPR/07	HE4HNWPR/07/BK	66.4 mm	50
8 pole	HE4HNWPR/08	HE4HNWPR/08/BK	76.4 mm	50
9 pole	HE4HNWPR/09	HE4HNWPR/09/BK	86.4 mm	50
10 pole	HE4HNWPR/10	HE4HNWPR/10/BK	96.4 mm	50
11 pole	HE4HNWPR/11	HE4HNWPR/11/BK	106.4 mm	50
12 pole	HE4HNWPR/12	HE4HNWPR/12/BK	116.4 mm	50

Accessories

	Cat. No.	Std. Pk.
External Jumpers		
2 pole	HCL10-2	100
3 pole	HCL10-3	100
4 pole	HCL10-4	100
12 pole	HCL10-12	25


HE4HN DIMENSIONS

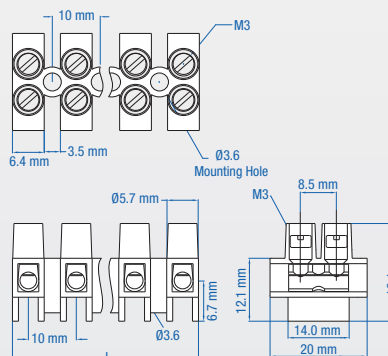

(All dimensions are shown in mm, to convert to inches please divide by 25.4)

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

HE10H



HIGHLIGHTS

FEATURES

- **600V** up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white

APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

Dimensions & Weight

Pitch Spacing
Weight per piece (12 pole)

Technical Data/Ratings

Approvals	CE (FI)
Wire Size (solid / stranded)	
Voltage Rating	
Current Rating	
Torque	
Insulation Material	
Insert Material	
Screw Material	

15 mm
98.7 g

	
18-8 AWG	6-10 mm²
600 V	500 V
50 A	25 A
7.6 lb-in	0.84 Nm
Polyamide 66/6 V0	
Tinned Brass	
Blue Chromated Steel	

Installation Instructions

Wire Stripping Length	
Mounting Hole Diameter	
Terminal Screw Size	

6 mm
4.5 mm
M4


Terminal Strips

Terminal Strips	Cat. No. 	Cat. No. 	Length	Std. Pk.
2 pole	HE10HWPR/02	HE10HWPR/02/BK	24.2 mm	40
3 pole	HE10HWPR/03	HE10HWPR/03/BK	39.2 mm	40
4 pole	HE10HWPR/04	HE10HWPR/04/BK	54.2 mm	40
5 pole	HE10HWPR/05	HE10HWPR/05/BK	69.2 mm	40
6 pole	HE10HWPR/06	HE10HWPR/06/BK	84.2 mm	20
7 pole	HE10HWPR/07	HE10HWPR/07/BK	99.2 mm	20
8 pole	HE10HWPR/08	HE10HWPR/08/BK	114.2 mm	20
9 pole	HE10HWPR/09	HE10HWPR/09/BK	129.2 mm	10
10 pole	HE10HWPR/10	HE10HWPR/10/BK	144.2 mm	10
11 pole	HE10HWPR/11	HE10HWPR/11/BK	159.2 mm	10
12 pole	HE10HWPR/12	HE10HWPR/12/BK	174.2 mm	10


Accessories

Accessories		Cat. No.	Std. Pk.
External Jumpers	2 pole	HCL15-2	100
	3 pole	HCL15-3	100
	4 pole	HCL15-4	100
	12 pole	HCL15-12	25

HE10H DIMENSIONS

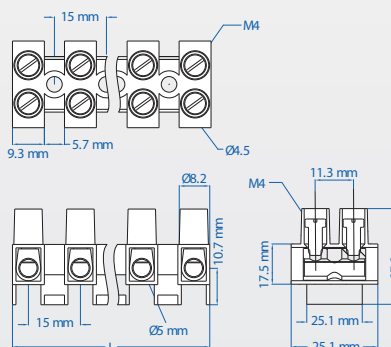

(All dimensions are shown in mm, to convert to inches please divide by 25.4)

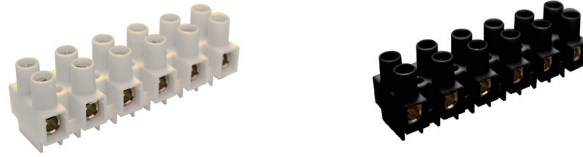HE16H**Dimensions & Weight**

Pitch Spacing	15 mm
Weight per piece (12 pole)	99.3 g

Technical Data/Ratings

Approvals	CE (F)
Wire Size (solid / stranded)	18-6 AWG
Voltage Rating	600 V
Current Rating	63 A
Torque	17.7 lb-in
Insulation Material	Polyamide 66/6 V0
Insert Material	Tinned Brass
Terminal Screw Material	Blue Chromated Steel

UL US E211022	IEC 60998-2-1
18-6 AWG	10-16 mm ²
600 V	500 V
63 A	35 A
17.7 lb-in	1.4 Nm
Polyamide 66/6 V0	
Tinned Brass	
Blue Chromated Steel	

Installation Instructions

Wire Stripping Length	6 mm
Mounting Hole Diameter	4.5 mm
Terminal Screw Size	M5

6 mm
4.5 mm
M5

Terminal Strips

	Cat. No. □	Cat. No. ■	Length	Std. Pk.
2 pole	HE16HWPR/02	HE16HWPR/02/BK	24.2 mm	40
3 pole	HE16HWPR/03	HE16HWPR/03/BK	39.2 mm	40
4 pole	HE16HWPR/04	HE16HWPR/04/BK	54.2 mm	40
5 pole	HE16HWPR/05	HE16HWPR/05/BK	69.2 mm	40
6 pole	HE16HWPR/06	HE16HWPR/06/BK	84.2 mm	20
7 pole	HE16HWPR/07	HE16HWPR/07/BK	99.2 mm	20
8 pole	HE16HWPR/08	HE16HWPR/08/BK	114.2 mm	20
9 pole	HE16HWPR/09	HE16HWPR/09/BK	129.2 mm	10
10 pole	HE16HWPR/10	HE16HWPR/10/BK	144.2 mm	10
11 pole	HE16HWPR/11	HE16HWPR/11/BK	159.2 mm	10
12 pole	HE16HWPR/12	HE16HWPR/12/BK	174.2 mm	10

Accessories


	Cat. No.	Std. Pk.
External Jumpers	HCL15-2	100
	HCL15-3	100
	HCL15-4	100
	HCL15-12	25

HIGHLIGHTS**FEATURES**

- 600V up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white

APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

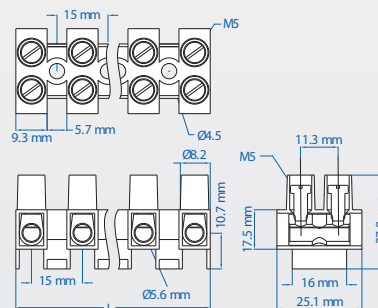HE16H DIMENSIONS

(All dimensions are shown in mm, to convert to inches please divide by 25.4)