




# 92X92X25mm




## General Specifications

|            |                                          |
|------------|------------------------------------------|
| Airflow    | 21~36 CFM                                |
| Housing    | Die Cast Aluminum & Zinc                 |
| Impeller   | Plastic With Fiber Glass Filled UI 94V-0 |
| Motor Type | Shaded Pole, Impedance Protected         |
| Connecting | Terminal & Wire Leads                    |

## Dimensions:mm

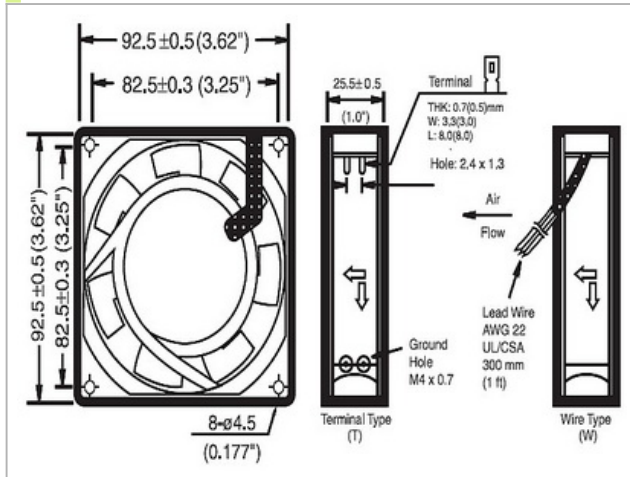

## Performance

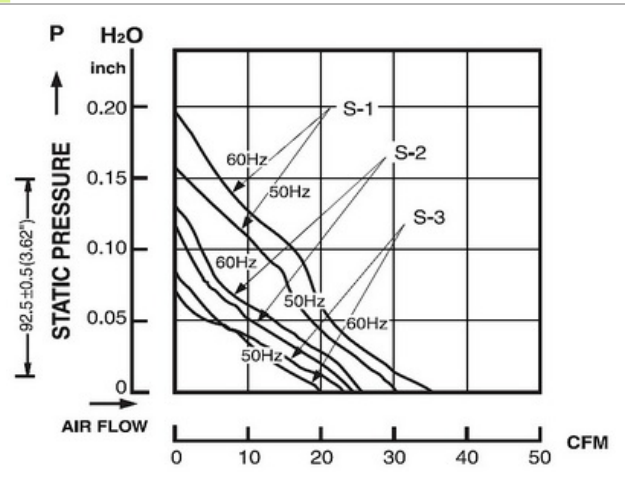

## Specifications

| Model NO. | Bearing | Rated Voltage | Frequency | Speed     | Airflow | Static Pressure | Current   | Power | Noise |
|-----------|---------|---------------|-----------|-----------|---------|-----------------|-----------|-------|-------|
|           |         | VAC           | HZ        | RPM       | CFM     | Inch-H2O        | A         | W     | dBA   |
| GA1092HBL | 2BALL   | 110/120       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.21/0.20 | 19/17 | 35/37 |
| GA1092HBT | 2BALL   | 110/120       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.21/0.20 | 19/17 | 35/37 |
| GA1092HSL | SLEEVE  | 110/120       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.21/0.20 | 19/17 | 35/37 |
| GA1092HST | SLEEVE  | 110/120       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.21/0.20 | 19/17 | 35/37 |
| GA2092HBL | 2BALL   | 220/240       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.10/0.09 | 19/17 | 35/37 |
| GA2092HBT | 2BALL   | 220/240       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.10/0.09 | 19/17 | 35/37 |
| GA2092HSL | SLEEVE  | 220/240       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.10/0.09 | 19/17 | 35/37 |
| GA2092HST | SLEEVE  | 220/240       | 50/60     | 2400/2800 | 30/36   | 0.16/0.20       | 0.10/0.09 | 19/17 | 35/37 |
| GA1092MBL | 2BALL   | 110/120       | 50/60     | 2100/2400 | 25/28   | 0.13/0.14       | 0.07/0.06 | 12/10 | 28/30 |
| GA2092MBL | 2BALL   | 220/240       | 50/60     | 2100/2400 | 25/28   | 0.13/0.14       | 0.06/0.05 | 12/10 | 28/30 |
| GA1092LBL | 2BALL   | 110/120       | 50/60     | 1700/1900 | 21/22   | 0.10/0.09       | 0.06/0.05 | 8/6   | 22/24 |
| GA2092LBL | 2BALL   | 220/240       | 50/60     | 1700/1900 | 21/22   | 0.10/0.09       | 0.05/0.04 | 8/6   | 22/24 |