




MTS-302-A2: ON-ON, PC Terminals
MTS-303-A3: ON-OFF-ON, PC Terminals

Housing:	Bakelite	Lever:	Brass with Nickel plated
Terminal:	Brass with sliver plated	Torque:	Max. 5kg·cm (70 ounce·inch)
Rating:	6A 125VAC/3A 250VAC	Contact Resistance:	50mΩ max
Electrical Life:	≥ 10,000 Cycles	Mechanical Life:	≥ 100,000 Cycles
Dielectric strength:	1500VAC 1 minute	Operating Temperature:	-25°C~+85°C
Insulation Resistance:	1000mΩ min (500VDC)	OEM or ODM:	Available

技术特性 (Specification)

1. 规格 (Rating): 6A 125V AC; 3A 250V AC
2. 接触电阻 (Contact R): 20mΩ max
3. 绝缘电阻 (Insulation R): 500V DC 100MΩ min
4. 耐电压 (Dielectric Strength): 1 Minute 1500V AC
5. 操作温度 (Operating Temperature): -25℃ ~ +85℃
6. 电气寿命 (Electrical Life): 10, 000 Cycles

外型图 (Outline Drawing)

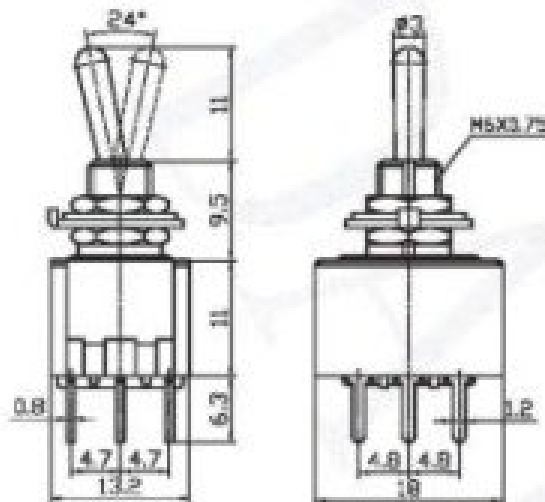

安装尺寸 (Mounting)



电路图 (Circuitry)

