




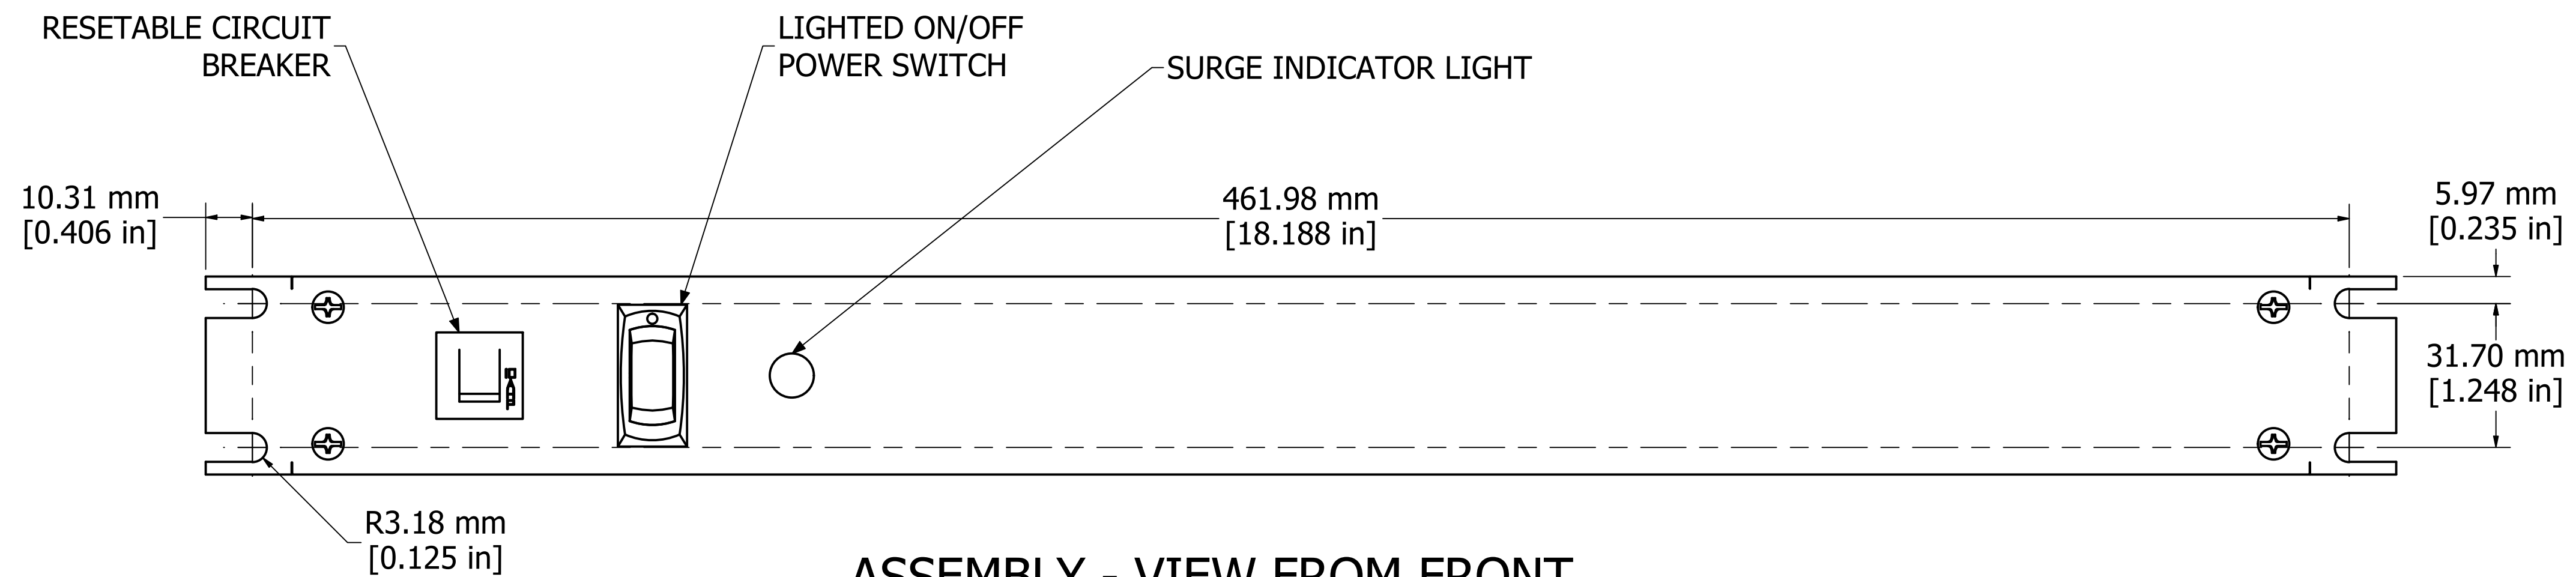


ASSEMBLY - VIEW FROM FRONT

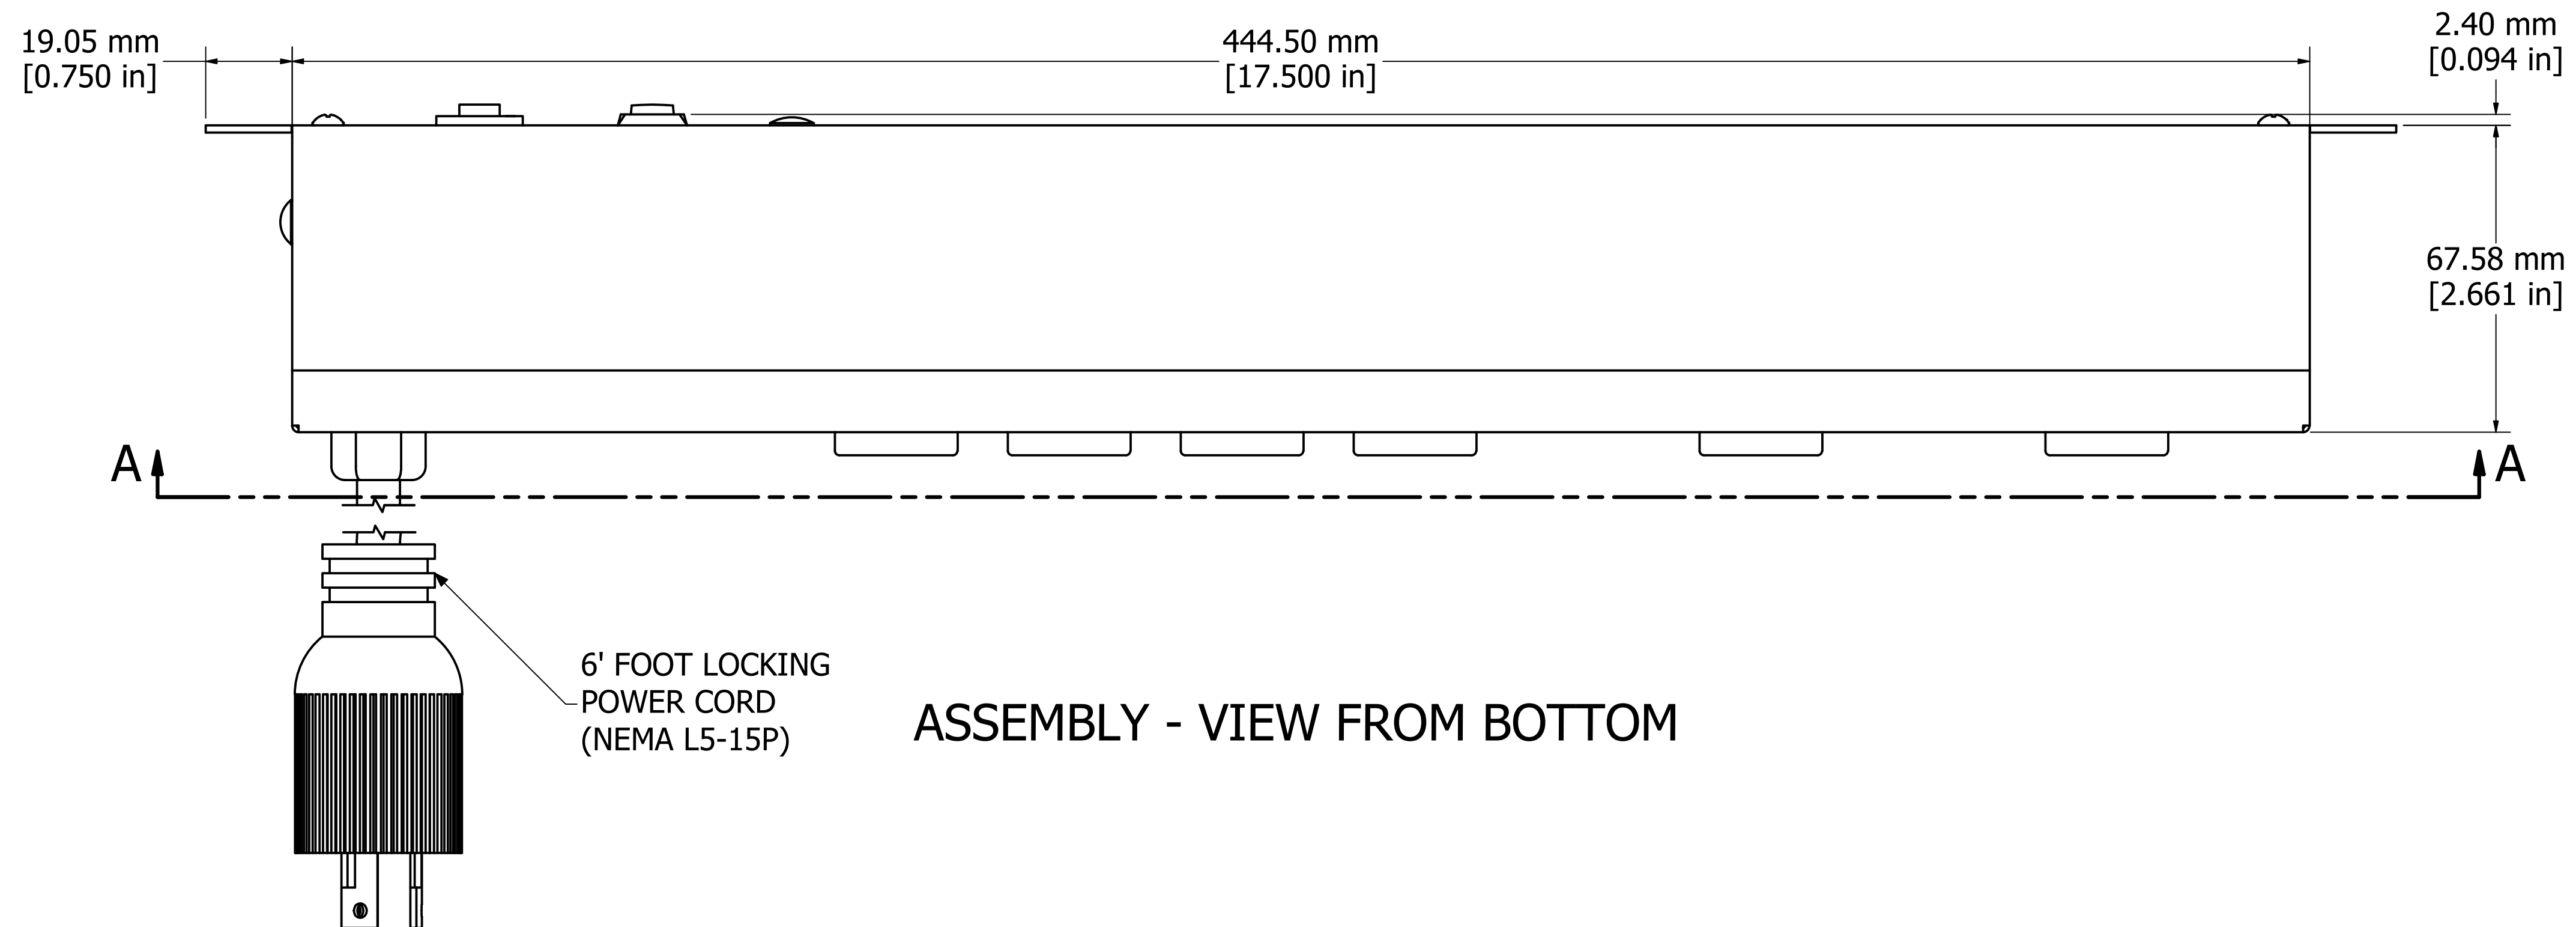


ASSEMBLY - VIEW FROM BOTTOM

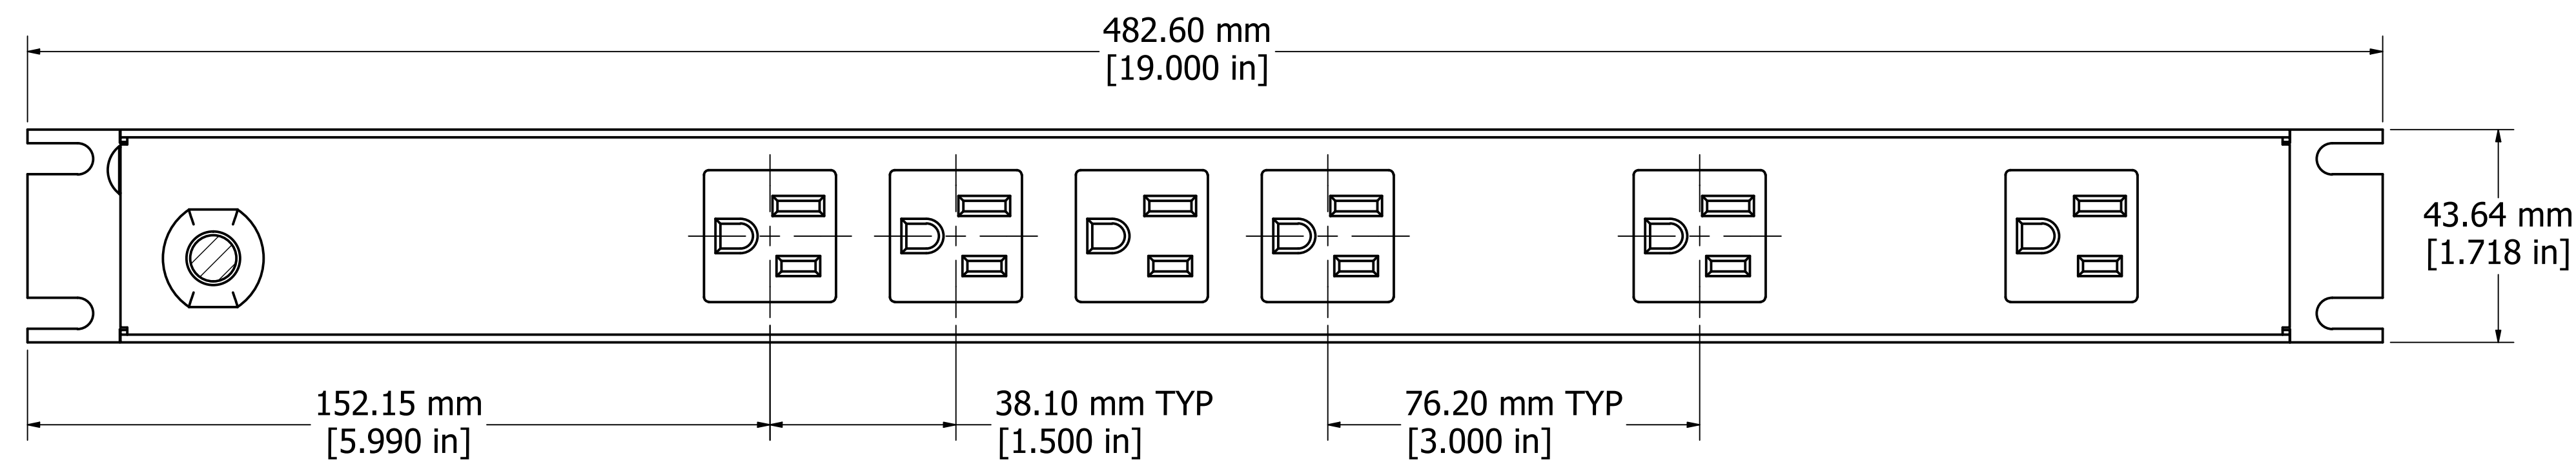

SECTION A-A

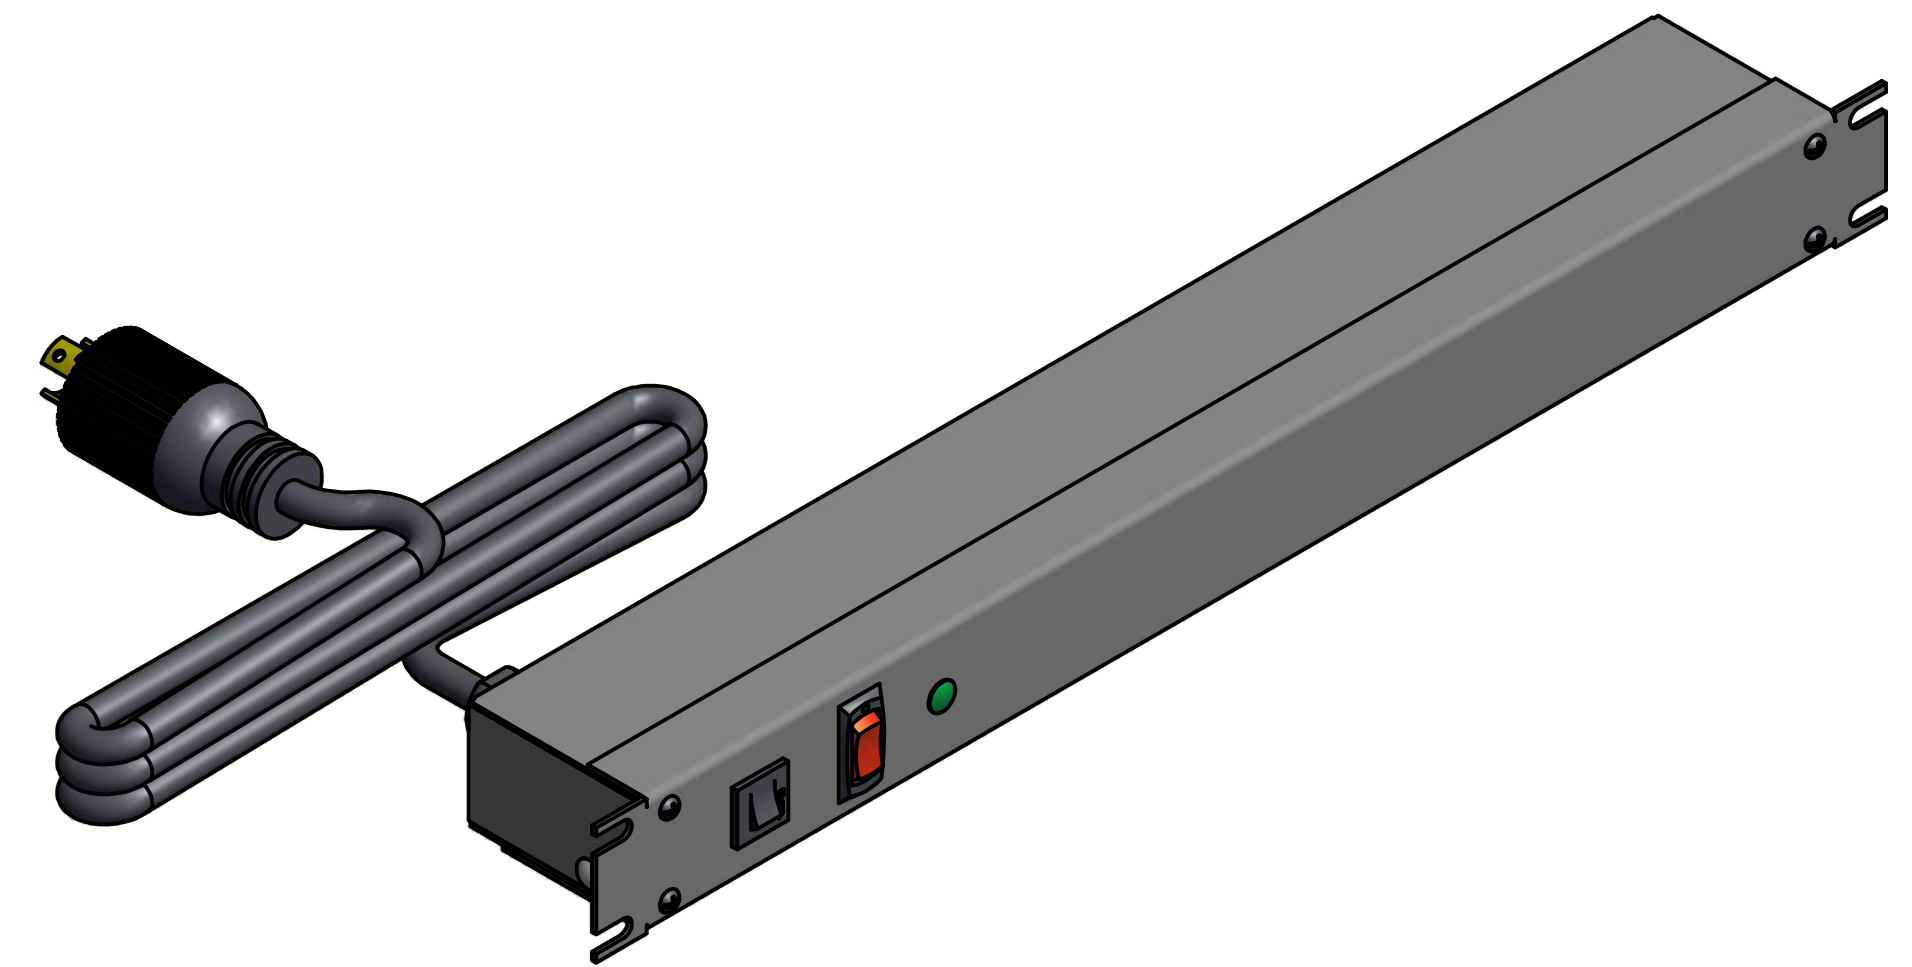

ISOMETRIC VIEW

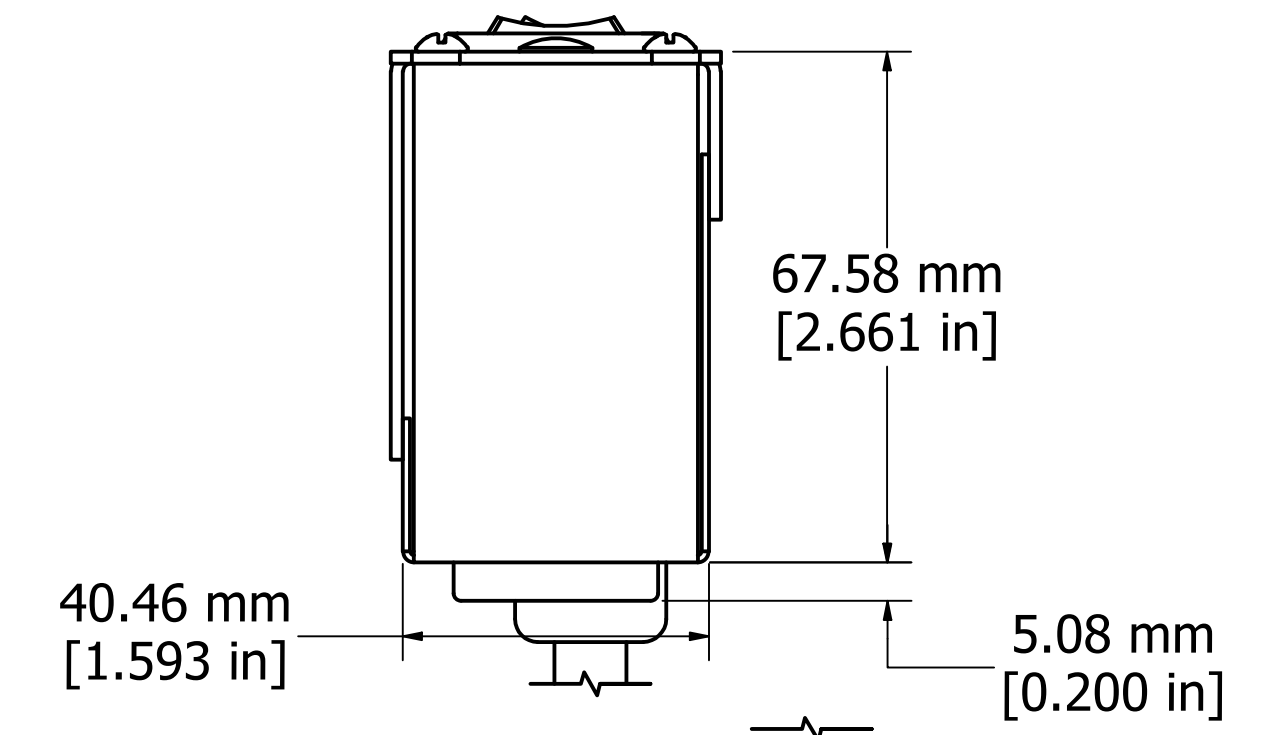

ASSEMBLY - VIEW FROM SIDE

| 1583H6C1S                                                    |
|--------------------------------------------------------------|
| Finish - Front - ASA 61 Grey Painted Steel                   |
| Back - ASA 61 Grey Painted Steel                             |
| Rated - 125 VAC, 60 Hz, 15 Amps                              |
| Approvals - cURus Recognized to: UL1449 & C22.2 No. 269.3-17 |
| Surge Specs - 1080 Joules, 75000 Amps Transient Current      |
| - 500V Voltage Protection Rating (VPR)                       |

**HAMMOND**  
**MANUFACTURING™**  
**1583H6C1S**  
[www.hammondmfg.com](http://www.hammondmfg.com)