


Mechanical Dimensions: Inches [mm]

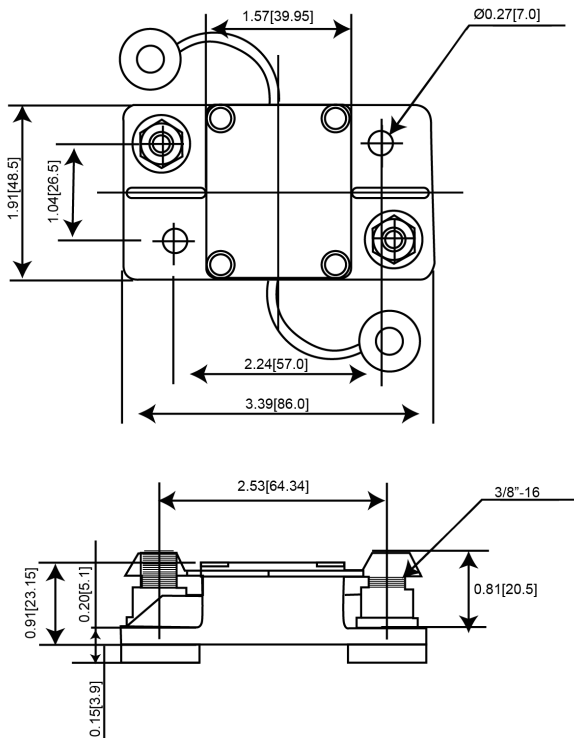


Unless Otherwise Specified All Dimensions Have a Tolerance of ± 0.008 in (0.2mm)

Part Numbers Information

Optifuse P/N	Current
351025	25A
351030	30A
351040	40A
351050	50A
351060	60A
351070	70A
351080	80A
351090	90A
351100	100A
351120	120A
351135	135A
351140	140A
351150	150A
351175	175A
351200	200A
351250	250A
351300	300A

Time vs. Percent of Rated Current

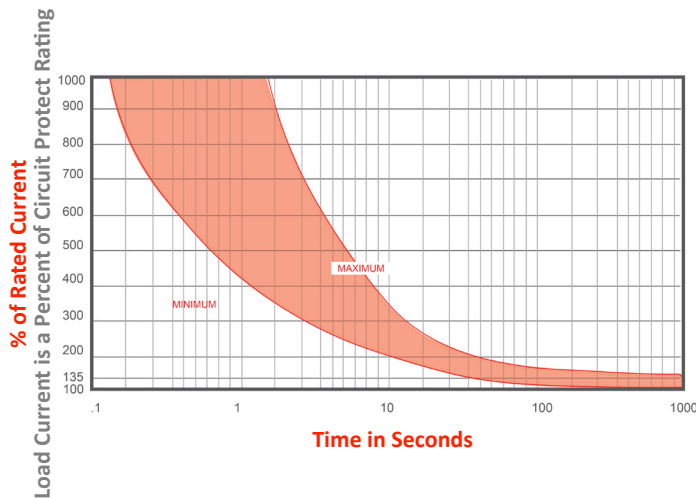

% of Rated Current	Min Hold Time	Max Hold Time
100%	No Trip (≥ 30 Minutes)	
135%	50s	30m
200%	12s	45s
300%	3.5s	15s

Trip time: Ambient temperature $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$

*Trip time information is only for models up to 200A. For information regarding 250A and 300A models please contact the factory.

Electrical Specifications

Voltage Rating	48VDC (25-200A) 14VDC (250-300A)
Reset Type	Type I - Auto Reset
Interrupting Rating	3000A @ 30VDC (25A-150A), 1500A @ 30VDC (175A-300A) (ABYC E-11)
Operation Temperature	$-25^{\circ}\text{F} \sim 180^{\circ}\text{F}$ $-32^{\circ}\text{C} \sim 82^{\circ}\text{C}$
Testing	SAE J553, ABYC-E11

Material Specifications

Heavy Duty High Amp - Waterproof Circuit Breaker	
Body Material	Thermoset Plastic (UL94V-0)
Terminals Material	Nickel Plated
Terminals Configuration	3/8"-16 Stud
Mounting Type	Surface Mount
Studs Torque	30.5 N.m max.
Mounting Torque	~ 24 N-m MAX
Ignition Protected	SAE J1171
Ingress Protection	IP67

Rev	Date of issue	Revision Notes	Designed	Approved
G	08-20-2024	Updated Electrical Specifications	RC	OF