

# RHS16225LD



## Accessories: Heatsinks



### Main features

- 0.84°C/W thermal resistance
- Suitable for mounting of 1-phase SSRs or 3-phase SSRs
- Panel or thru wall mounting
- Dimensions W x H x D: 162 x 250 x 25 mm
- RoHS compliant


### Description

Heatsink assembly suitable for mounting of maximum 3x 1- phase solid state relay (SSR) or 1x 3-phase SSR.

Suffix H55L added to SSR part no. refers to factory mounted heatsink. Conditions apply. Please ask your sales representative for further details.

# Structure

## 1-phase SSR

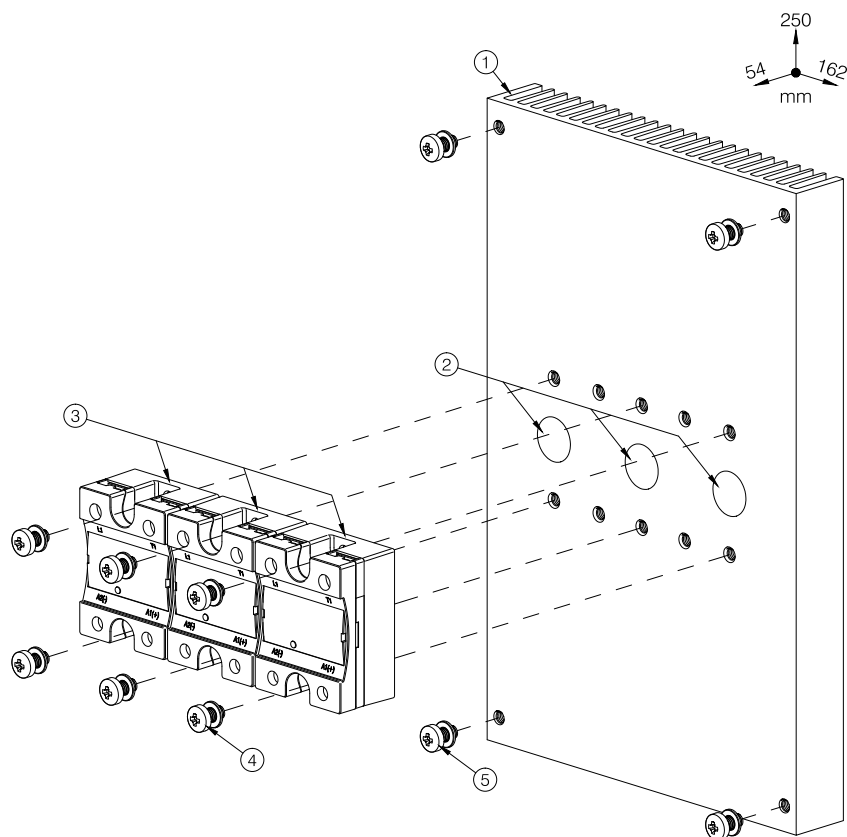


| Element | Component                          | Qty | RHS16225LD   |
|---------|------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly       | 1   | Provided     |
| 2       | Thermal Compound or Pad            | 1   | Not provided |
| 3       | 1-phase SSR 45x59mm (max.)         | 3   | Not provided |
| 4       | M5x10mm PZ2 + Washer (per SSR)     | 2   | Not provided |
| 5       | Thru wall panel mounting screws M5 | 4   | Not provided |

Note:

\* 58mm for RK..C, 69mm for RK..P (including plug).

Dimensions including the SSR.


# RGS1 18mm Module

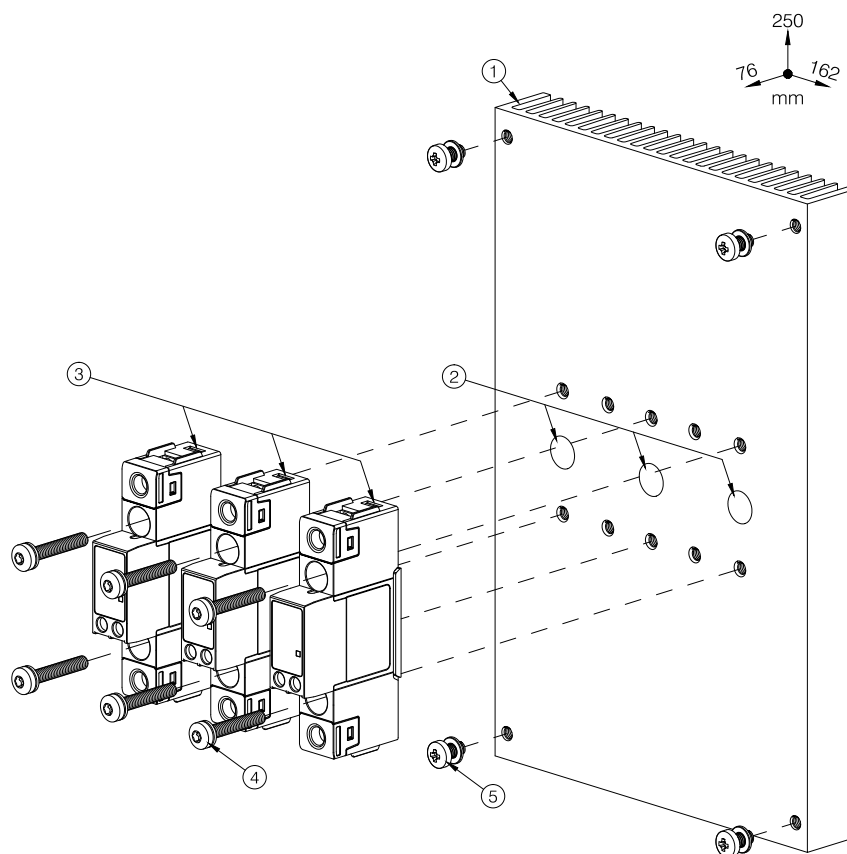

| Element | Component                           | Qty | RHS16225LD   |
|---------|-------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly        | 1   | Provided     |
| 2       | Thermal Compound or Pad             | 1   | Not provided |
| 3       | RGS1 SSR 18x90mm (max.)             | 3   | Not provided |
| 4       | M5x30mm Torx T20 + Washer (per SSR) | 2   | Not provided |
| 5       | Thru wall panel mounting screws M5  | 4   | Not provided |

Note:  
Dimensions including the SSR.


# RGS1 22.5mm Module

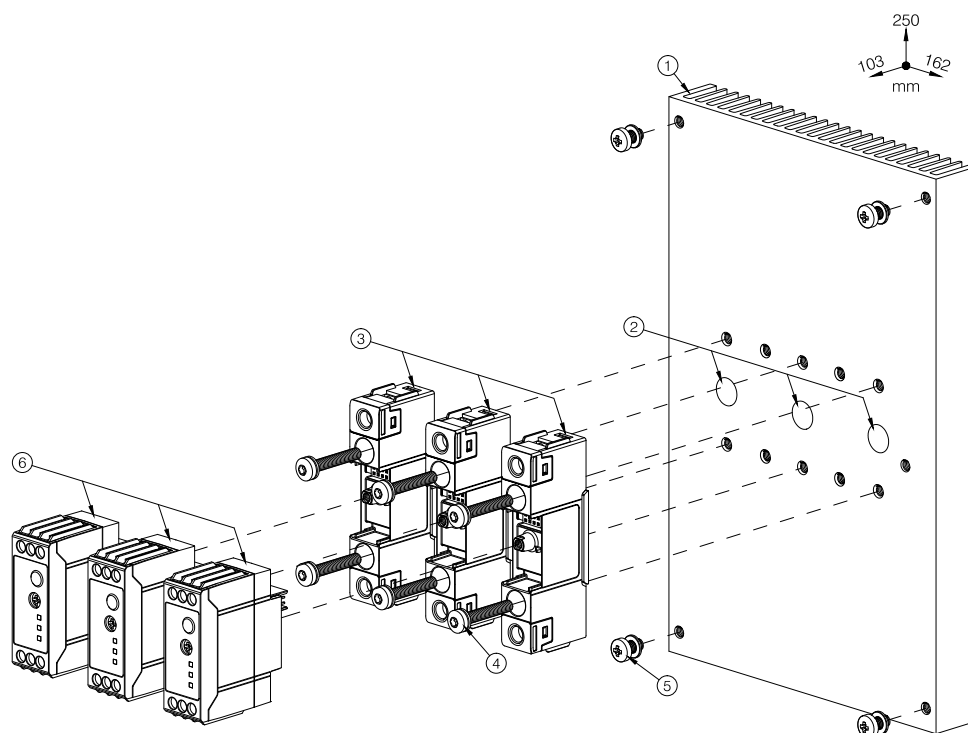

| Element | Component                             | Qty | RHS16225LD   |
|---------|---------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly          | 1   | Provided     |
| 2       | Thermal Compound or Pad               | 1   | Not provided |
| 3       | RGS1 Power Module 18x90mm (max.)      | 3   | Not provided |
| 4       | M5x30mm Torx T20 + Washer (per SSR)   | 2   | Not provided |
| 5       | Thru wall panel mounting screws M5    | 4   | Not provided |
| 6       | RGS1S Control Module 22.5x65mm (max.) | 3   | Not provided |

Note:  
Dimensions including the SSR.


## RGS1 35mm Module

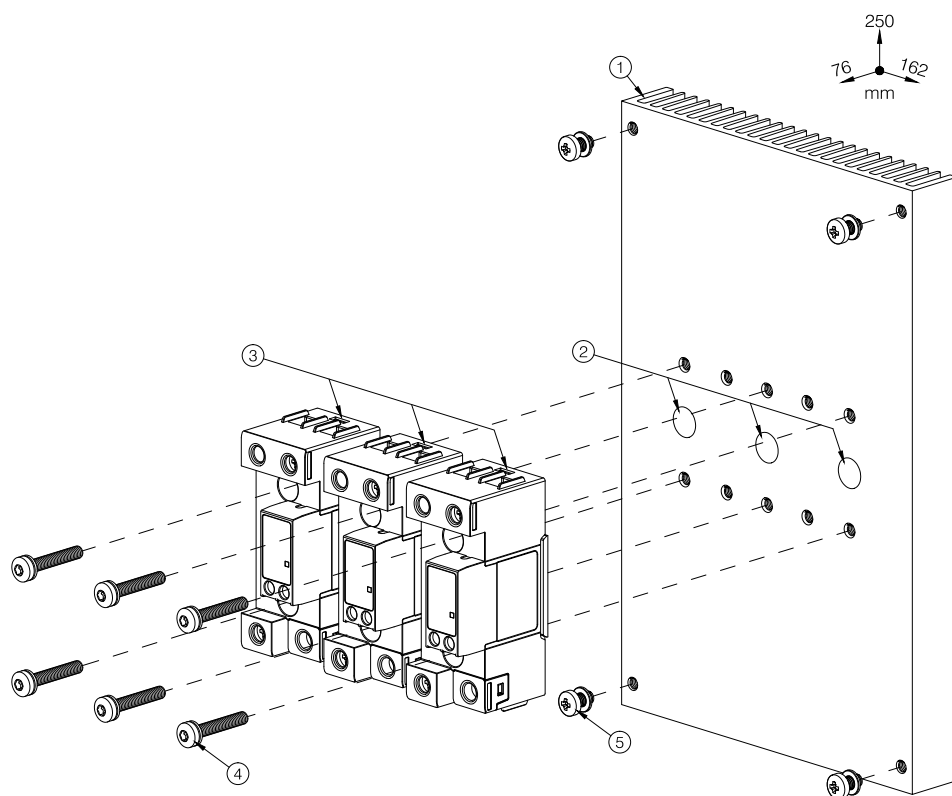

| Element | Component                           | Qty | RHS16225LD   |
|---------|-------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly        | 1   | Provided     |
| 2       | Thermal Compound or Pad             | 1   | Not provided |
| 3       | RGS1 or RGS1S SSR 36x90mm (max.)    | 3   | Not provided |
| 4       | M5x30mm Torx T20 + Washer (per SSR) | 2   | Not provided |
| 5       | Thru wall panel mounting screws M5  | 4   | Not provided |

Note:  
Dimensions including the SSR.


## RGS1P 35mm Module

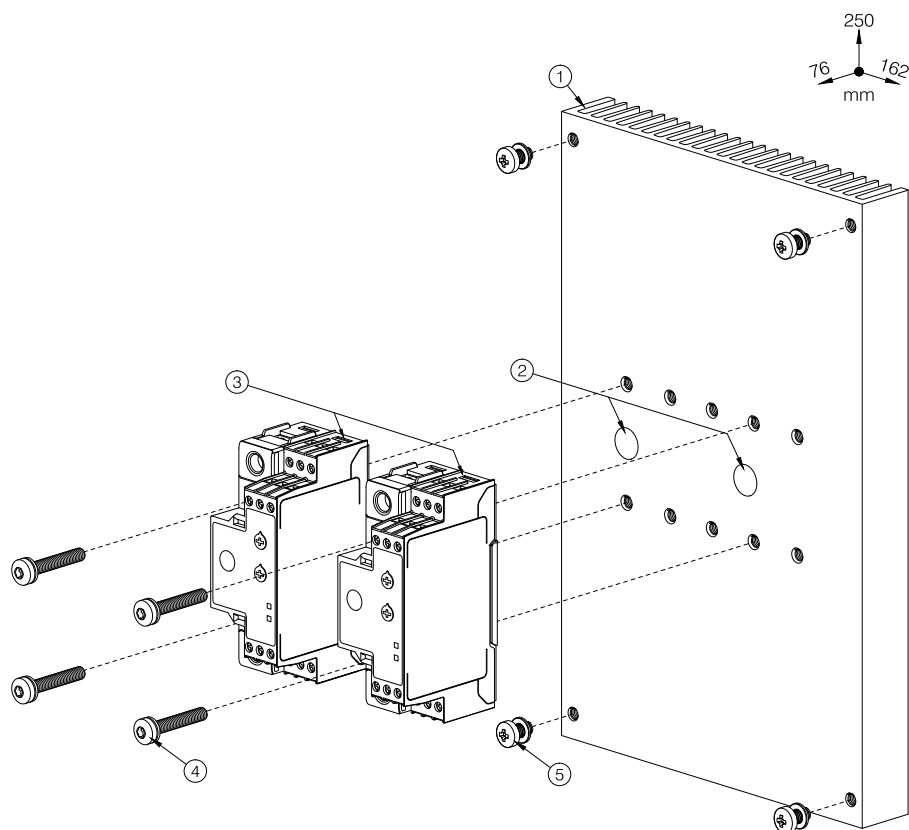

| Element | Component                           | Qty | RHS16225LD   |
|---------|-------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly        | 1   | Provided     |
| 2       | Thermal Compound or Pad             | 1   | Not provided |
| 3       | RGS1P SSR 35x90mm (max.)            | 2   | Not provided |
| 4       | M5x30mm Torx T20 + Washer (per SSR) | 2   | Not provided |
| 5       | Thru wall panel mounting screws M5  | 4   | Not provided |

Note:  
Dimensions including the SSR.

## 3-phase SSR

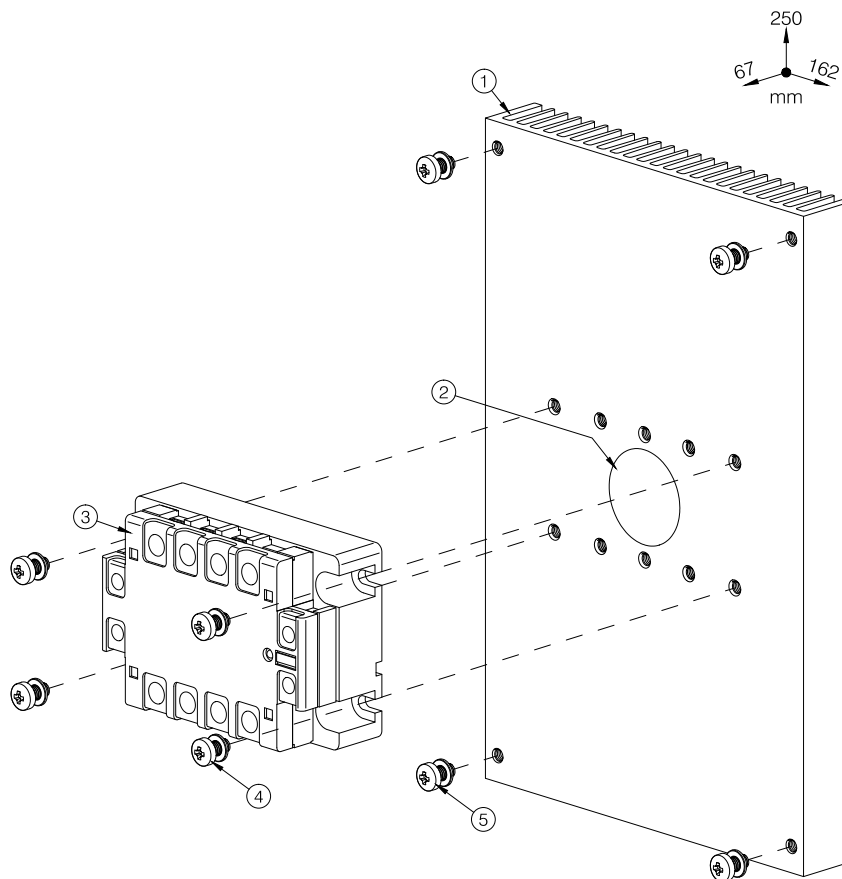

| Element | Component                          | Qty | RHS16225LD   |
|---------|------------------------------------|-----|--------------|
| 1       | RHS16225LD heatsink assembly       | 1   | Provided     |
| 2       | Thermal Compound or Pad            | 1   | Not provided |
| 3       | 3-phase SSR 104 x 74mm             | 1   | Not provided |
| 4       | M5x10mm PZ2 + Washer               | 4   | Not provided |
| 5       | Thru wall panel mounting screws M5 | 4   | Not provided |


Dimensions including the SSR.


## Features


### General

|                          |                    |
|--------------------------|--------------------|
| SSR max. mounting torque | 1.5Nm (13.3 lb-in) |
| Weight (excl. SSR)       | approx 1290g       |
| Material                 | Aluminium          |
| Finish                   | Silver anodization |
| Fan mounting             | Not possible       |

### Thermal resistance curve

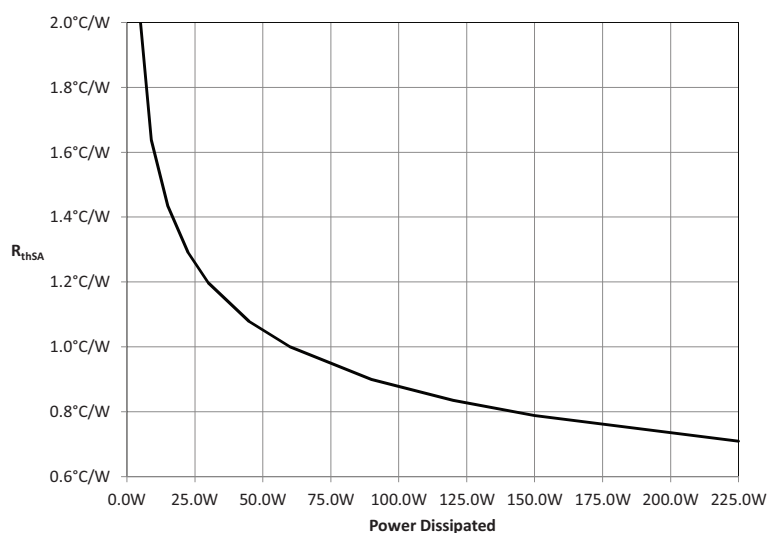

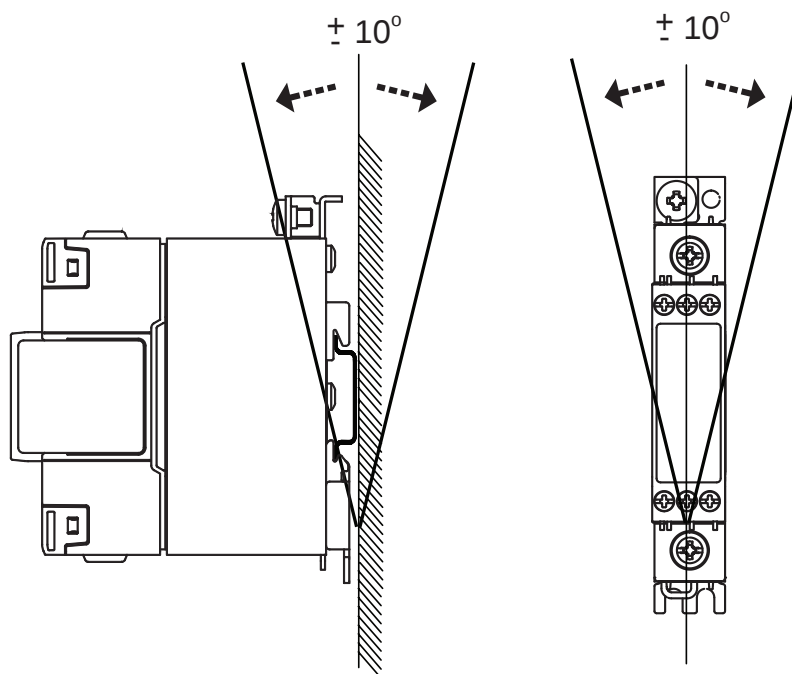 Mounting position

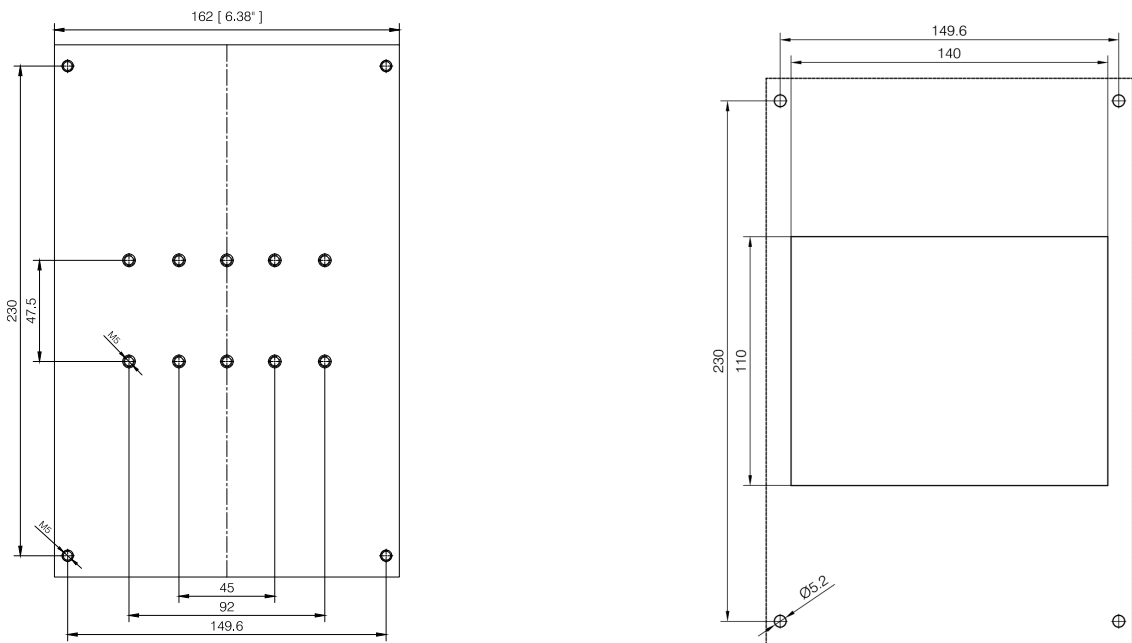

**Fig. 1** Panel mount hole positions / Thru wall panel cutout

All dimensions in mm.  
Illustrations are for example only.



## Recommended maximum current rating (per SSR)

1. The below recommendations are only valid when the assembly (SSR + heatsink) is mounted as shown in the mounting instructions unless otherwise indicated.
2. The indicated ratings are applicable to one SSR, one pole. Please refer to the online selector tool at [www.productselection.net](http://www.productselection.net) for different load currents, surrounding temperatures or multiple units on one heatsink.
3. These recommendations are applicable only with the indicated Carlo Gavazzi thermal interface material between SSR and heatsink. In case a different thermal interface is utilised these recommendations may no longer be valid.

### Pre-attached phase change paste

| 1x<br>2-pole<br>SSR | Surrounding temperature |          |          |           |           |           |           |           |
|---------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                     | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RK 2.. (per pole)   | 50                      | 43       | 38.5     | 34        | 29        | 24.5      | 19.5      | 14.5      |
|                     | 51                      | 48       | 42.5     | 37        | 32        | 26.5      | 21        | 16        |
|                     | 75                      | 54.5     | 48.5     | 42.5      | 36        | 30        | 23.5      | 17.5      |

### Thermal compound, HTS02S

| 1x<br>3-phase<br>SSR | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                      | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RZ3A..               | 25                      | 23.5     | 22       | 19.5      | 15.5      | 11.5      | 7         | 3         |
|                      | 55                      | 32.5     | 30       | 24.5      | 19.5      | 14.5      | 10        | 5         |
|                      | 75                      | 38       | 35       | 29.5      | 24        | 18.5      | 13        | 8         |

Ratings per pole

### Thermal pad, RZHT

| 1x<br>3-phase<br>SSR | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                      | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RZ3A..               | 25                      | 21.5     | 20       | 17.5      | 15        | 11.5      | 7         | 3         |
|                      | 55                      | 29       | 27.5     | 24.5      | 20.5      | 15        | 10        | 5.5       |
|                      | 75                      | 38.5     | 36       | 30        | 24.5      | 18.5      | 13.5      | 8         |

 Thermal compound, HTS02S

| 1x<br>1-phase<br>SSR                         | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------------------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                                              | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RA..L<br>RA..T                               | 10                      | 10       | 10       | 10        | 10        | 10        | 10        | -         |
|                                              | 25                      | 25       | 25       | 22.5      | 19.5      | 16.5      | 13.5      | -         |
| RA..                                         | 25                      | 25       | 25       | 25        | 22.5      | 18        | 14        | -         |
|                                              | 50                      | 44.5     | 41.5     | 36        | 30        | 24.5      | 18.5      | -         |
|                                              | 90                      | 59.5     | 55.5     | 47.5      | 39.5      | 31.5      | 23.5      | -         |
|                                              | 110                     | 67       | 62.5     | 53.5      | 44.5      | 35        | 26        | -         |
| RA60..                                       | 50                      | 44       | 41       | 36        | 30.5      | 24.5      | 18.5      | -         |
| RA2A.. (per pole)                            | 25                      | 25       | 25       | 25        | 22.5      | 17.5      | 11.5      | -         |
|                                              | 40                      | 34       | 32.5     | 28.5      | 25        | 19        | 12.5      | -         |
|                                              | 25M                     | 25       | 25       | 25        | 22.5      | 17.5      | 11.5      | -         |
|                                              | 40M                     | 35       | 33       | 29.5      | 25.5      | 19        | 12.5      | -         |
| RS1A..                                       | 10                      | 10       | 10       | 10        | 9.5       | 7.5       | 5.5       | -         |
|                                              | 25                      | 25       | 25       | 25        | 25.0      | 25        | 18        | -         |
|                                              | 40                      | 40       | 40       | 40        | 37.5      | 28.5      | 19.5      | -         |
| RS1A..E                                      | 25                      | 23       | 21.5     | 19        | 16        | 13.5      | 11        | -         |
|                                              | 40                      | 27.5     | 26       | 22.5      | 19.5      | 16        | 13        | -         |
| RM1A..<br>RM1B..<br>RM1C..                   | 25                      | 25       | 25       | 25        | 25        | 25        | 18        | -         |
|                                              | 50                      | 50       | 50       | 46.5      | 37.5      | 28.5      | 19.5      | -         |
|                                              | 75                      | 72       | 67       | 56        | 45        | 34        | 23        | -         |
|                                              | 100                     | 80.5     | 74       | 61.5      | 49        | 36.5      | 24.5      | -         |
| RM1A60..<br>RM1B60..<br>RM1C60..<br>RM1E60.. | 50                      | 49       | 46.5     | 41.5      | 36.5      | 29        | 20        | -         |
| RAM1A..<br>RAM1B..<br>RM1E..                 | 25                      | 25       | 25       | 25        | 25        | 25        | 18        | 10        |
|                                              | 50                      | 50       | 50       | 46.5      | 37.5      | 28.5      | 19.5      | 10.5      |
|                                              | 75                      | 72       | 67       | 56        | 45        | 34        | 23        | 12.5      |
|                                              | 100                     | 72       | 67       | 56        | 45        | 34        | 23        | 12.5      |
|                                              | 125                     | 80.5     | 74       | 61.5      | 49        | 36.5      | 24.5      | 13.5      |
| RM1D060                                      | 10                      | 10       | 10       | 10        | 10        | 10        | 10        | 10        |
|                                              | 20                      | 20       | 20       | 20        | 20        | 19        | 13.5      | 6.5       |
|                                              | 50                      | 50       | 50       | 44        | 38        | 30.5      | 22        | 11        |
|                                              | 100                     | 78.5     | 74.5     | 65.5      | 56        | 45        | 32.5      | 16        |
| RM1D200                                      | 20                      | 20       | 19.5     | 17.5      | 16        | 14        | 12        | 9.5       |
|                                              | 50                      | 36       | 34.5     | 31.5      | 28.5      | 24.5      | 20.5      | 15.5      |
| RM1D500                                      | 10                      | 10       | 10       | 10        | 10        | 9.5       | 8         | 6.5       |

\* max. 70 °C / 158 °F for RGS1P..E

 Thermal compound, HTS02S

| 1x<br>1-phase<br>SSR | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                      | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RGS1..E<br>RGS1P..E* | 25                      | 25       | 25       | 25        | 25        | 25        | 25        | 21.5      |
|                      | 50                      | 50       | 50       | 50        | 45        | 38.5      | 32        | 25.5      |
|                      | 51                      | 50       | 50       | 50        | 44        | 38        | 32        | 25.5      |
|                      | 75                      | 68       | 64.5     | 57        | 50        | 43        | 35.5      | 28        |
|                      | 90<br>91<br>92          | 72.5     | 68.5     | 61        | 53.5      | 45.5      | 38        | 30        |
| RGS1..U              | 20                      | 20       | 20       | 20        | 20        | 20        | 20        | 20        |
|                      | 30                      | 30       | 30       | 30        | 30        | 30        | 30        | 25.5      |
| RGS1S..E             | 20                      | 23       | 23       | 23        | 23        | 23        | 23        | -         |
|                      | 30                      | 30       | 30       | 30        | 30        | 30        | 30        | -         |
|                      | 31                      | 30       | 30       | 30        | 30        | 30        | 30        | -         |
|                      | 92                      | 72.5     | 68.5     | 61        | 53.5      | 45.5      | 38        | -         |
| RGS1S..U             | 61                      | 65       | 65       | 61        | 53.5      | 45.5      | 38        | -         |
| RGS1D..              | 15                      | 15       | 15       | 15        | 15        | 15        | 15        | 15        |
|                      | 25                      | 25       | 25       | 25        | 24.5      | 21.5      | 18        | 15        |

\* max. 70 °C / 158 °F for RGS1P..E

Thermal pad KK071CUT for 1-phase SSRs, RGHT for RG SSRs

| 1x<br>1-phase<br>SSR                         | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------------------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                                              | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RA..L<br>RA..T                               | 10                      | 10       | 10       | 10        | 10        | 10        | 10        | -         |
|                                              | 25                      | 24       | 22.5     | 20        | 17.5      | 14.5      | 12        | -         |
| RA..                                         | 25                      | 25       | 25       | 24.5      | 20.5      | 17        | 13        | -         |
|                                              | 50                      | 39.5     | 37       | 32        | 27        | 21.5      | 16.5      | -         |
|                                              | 90                      | 49.5     | 46       | 40        | 33.5      | 26.5      | 20        | -         |
|                                              | 110                     | 55       | 51.5     | 44        | 36.5      | 29.5      | 22        | -         |
| RA60..                                       | 50                      | 39       | 36.5     | 32        | 27        | 22        | 16.5      | -         |
| RA2A.. (per pole)                            | 25                      | 25       | 25       | 23        | 20.5      | 17.5      | 12        | -         |
|                                              | 40                      | 30.5     | 29       | 26        | 22.5      | 19.5      | 13        | -         |
|                                              | 25M                     | 25       | 25       | 23        | 20.5      | 17.5      | 12        | -         |
|                                              | 40M                     | 31.5     | 29.5     | 26.5      | 23.0      | 19.5      | 13        | -         |
| RS1A..                                       | 10                      | 10       | 10       | 10        | 9         | 7         | 5         | -         |
|                                              | 25                      | 25       | 25       | 25        | 25        | 21.5      | 15        | -         |
|                                              | 40                      | 40       | 40       | 37        | 30        | 23        | 16        | -         |
| RS1A..E                                      | 25                      | 20.5     | 19       | 16.5      | 14.5      | 12        | 10        | -         |
|                                              | 40                      | 23.5     | 22       | 19.5      | 16.5      | 14        | 11.5      | -         |
| RM1A..<br>RM1B..<br>RM1C..                   | 25                      | 25       | 25       | 25        | 25        | 21.5      | 15        | -         |
|                                              | 50                      | 47.5     | 44       | 37        | 30        | 23        | 16        | -         |
|                                              | 75                      | 55       | 51       | 43        | 35        | 26.5      | 18.5      | -         |
|                                              | 100                     | 60.5     | 56       | 46.5      | 37.5      | 28.5      | 19.5      | -         |
| RM1A60..<br>RM1B60..<br>RM1C60..<br>RM1E60.. | 50                      | 43.5     | 41.5     | 37        | 30.5      | 24        | 16.5      | -         |
| RAM1A..<br>RAM1B..<br>RM1E..                 | 25                      | 25       | 25       | 25        | 25        | 21.5      | 15        | 8.5       |
|                                              | 50                      | 47.5     | 44       | 37        | 30        | 23        | 16        | 9         |
|                                              | 75                      | 55       | 51       | 43        | 35        | 26.5      | 18.5      | 10.5      |
|                                              | 100                     | 55       | 51       | 43        | 35        | 26.5      | 18.5      | 10.5      |
|                                              | 125                     | 60.5     | 56       | 46.5      | 37.5      | 28.5      | 19.5      | 11        |
| RM1D060                                      | 10                      | 10       | 10       | 10        | 10        | 10        | 10        | 6.5       |
|                                              | 20                      | 20       | 20       | 20        | 20        | 18.5      | 13.5      | 6.5       |
|                                              | 50                      | 50       | 48       | 42.5      | 36.5      | 29.5      | 21.5      | 10.5      |
|                                              | 100                     | 74.5     | 71       | 62.5      | 53.5      | 43.5      | 31.5      | 15.5      |
| RM1D200                                      | 20                      | 19       | 18.5     | 17        | 15.5      | 13.5      | 11.5      | 9.5       |
|                                              | 50                      | 34       | 32.5     | 30        | 27        | 24        | 20.5      | 15.5      |
| RM1D500                                      | 10                      | 10       | 10       | 10        | 10        | 9         | 8         | 6.5       |

Thermal pad KK071CUT for 1-phase SSRs, RGHT for RG SSRs

| 1x<br>1-phase<br>SSR | Surrounding temperature |          |          |           |           |           |           |           |
|----------------------|-------------------------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|                      | °C<br>°F                | 20<br>68 | 30<br>86 | 40<br>104 | 50<br>122 | 60<br>140 | 70<br>158 | 80<br>176 |
| RGS1..E<br>RGS1P..E* | 25                      | 25       | 25       | 25        | 25        | 25        | 21        | 17        |
|                      | 50                      | 46       | 44       | 39.5      | 34.5      | 29.5      | 25        | 20        |
|                      | 51                      | 45       | 43       | 38.5      | 34.5      | 29.5      | 25        | 20        |
|                      | 75                      | 51.5     | 49       | 44        | 38.5      | 33        | 27.5      | 21.5      |
|                      | 90<br>91<br>92          | 55.5     | 52.5     | 47        | 41.0      | 35.5      | 29.5      | 23.5      |
| RGS1..U              | 20                      | 20       | 20       | 20        | 20        | 20        | 20        | 17        |
|                      | 30                      | 30       | 30       | 30        | 30        | 30        | 25        | 20        |
| RGS1S..E             | 20                      | 23       | 23       | 23        | 23        | 23        | 21        | -         |
|                      | 30                      | 30       | 30       | 30        | 30        | 29.5      | 25        | -         |
|                      | 31                      | 30       | 30       | 30        | 30        | 30        | 29.5      | -         |
|                      | 92                      | 55.5     | 52.5     | 47        | 41        | 35.5      | 29.5      | -         |
| RGS1S..U             | 61                      | 55.5     | 52.5     | 47        | 41        | 35.5      | 29.5      | -         |
| RGS1D..              | 15                      | 15       | 15       | 15        | 15        | 15        | 13.5      | 11        |
|                      | 25                      | 23.5     | 22.5     | 20        | 18        | 16        | 13.5      | 11        |

\* max. 70 °C / 158 °F for RGS1P..E

## References

### CARLO GAVAZZI compatible components

| Purpose          | Component name/code | Notes                                            |
|------------------|---------------------|--------------------------------------------------|
| Thermal pads     | KK071CUT            | Packing qty. 50 pcs, suitable for 1-phase SSRs   |
|                  | RZHT                | Packing qty. 10 pcs, suitable for 3-phase SSR    |
|                  | RGHT                | Packing qty. 10 pcs, suitable for RG SSRs        |
| Thermal compound | HTS02S              | 2.38 ml sachet of silicon based thermal compound |
| Screw Kits       | SRWKITM5X10MM       | Packing qty. 20 pcs.                             |
|                  | SRWKITM5X30MM       | Packing qty. 20 pcs.                             |

### Further reading

| Information                   | Where to find it                                                                                                                                                    |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Online heatsink selector tool | <a href="https://gavazziautomation.com/nsc/HQ/EN/solid_state_relays">https://gavazziautomation.com/nsc/HQ/EN/solid_state_relays</a>                                 |
| Accessories                   | <a href="https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SSR_Accessories.pdf">https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SSR_Accessories.pdf</a> |

### Order code


**RHS16225LD**


COPYRIGHT ©2022  
 Content subject to change.  
 Download the PDF: <https://gavazziautomation.com>