

YSV12M SERIES



Input: 85-264VAC 50/60Hz
Output Voltage: 5V-48V DC
Rated Power: 12W max

Features

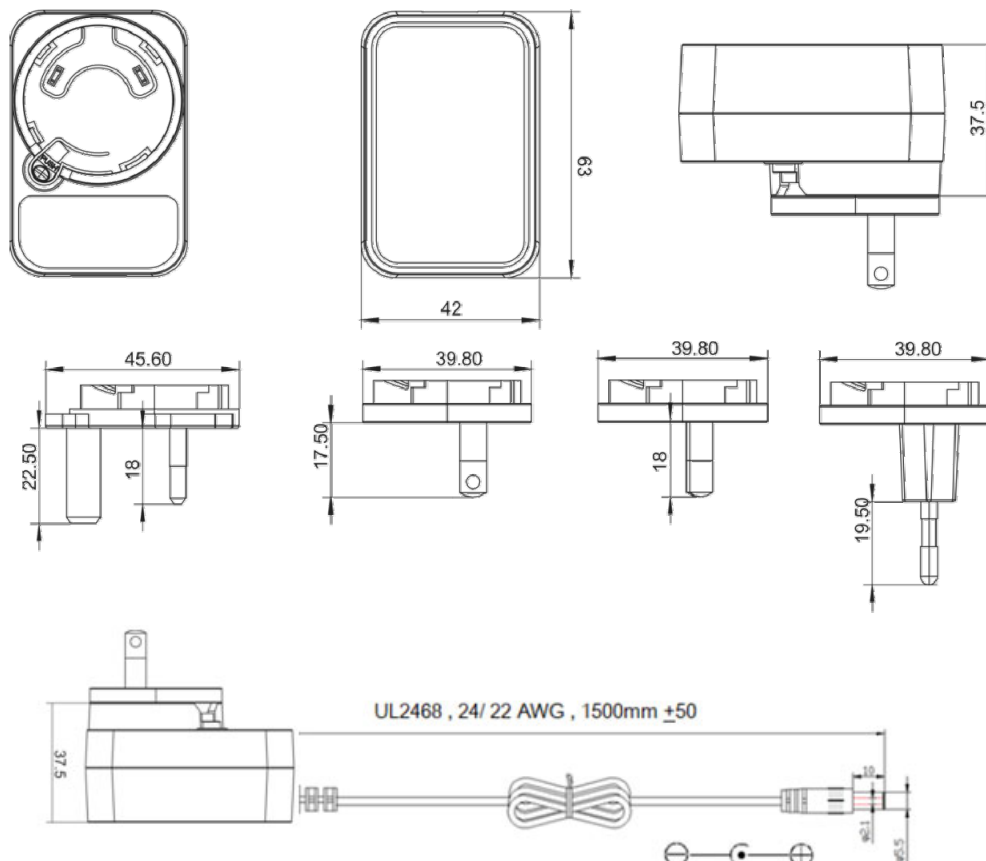
Univeral AC input/ Full range
 Energy efficiency level VI
 Leakage Current: < 0.1mA
 Extremely low leakage current
 Protection: Over load/Over voltage/Short circuit
 Withstand voltage : 4KV
 Life Warranty: 3 years

Application

Blood glucose meter
 Blood pressure meter
 Nebulizer
 Portable medical device
 Sleep apnea device



■ Dimensions and Installation

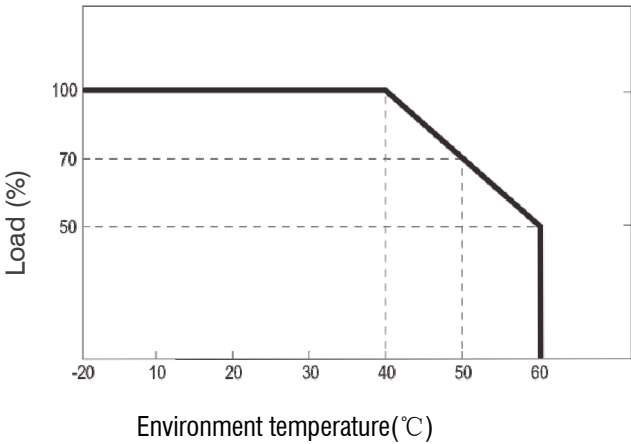


YSV12M SERIES

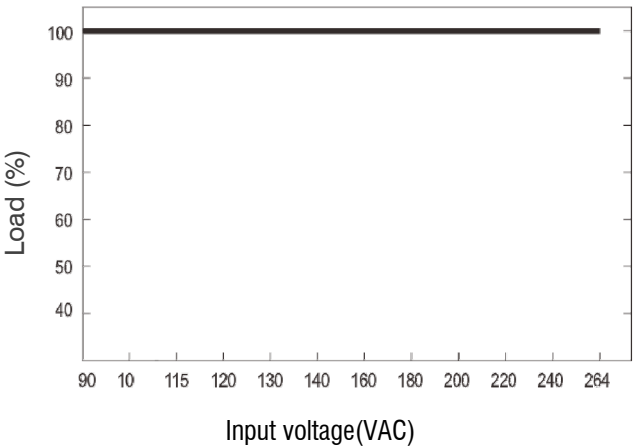
MODEL DETAIL SPEC.		YSV12-0502400M	YSV12-0901330M	YSV12-1201000M	YSV12-1500800M	YSV12-1800670M	YSV12-2400500M
INPUT	Input Voltage:	85-264VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	40A/115VAC 60A/230VAC					
	AC Current:	0.5A max.					
	Leakage Current:	< 0.1mA/240VAC					
	Efficiency:	80.5%	84%	84%	85%	85%	85%
OUTPUT	DC Voltage:	5V	9V	12V	15V	18V	24V
	Rated Current:	2.4A	1.33A	1A	0.8A	0.67A	0.5A
	Rated Power:	12W	12W	12W	12W	12W	12W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	90mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p	240mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +60 (Refer to "Derating Curve")					
	Storage Temp:	-40℃ ~ 85℃					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	105% -150% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	105% -130% rated output power					
		Protection type: Shut down o/p voltage, re-power on to recover					
	Over Temperature:	N/A					
SAFETY & EMC	Safety Regulations:	ANSI/AAMI ES60601-1 approved					
	Withstand Voltage:	I/P-O/P:4KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH					
	EMC Emission:	Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC Immunity:	EN/EN61000-4-2,3,4,5,6,8,11					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25℃)					
	Size:	61.5*40.5*37.5 mm					
	Weight:	135g / pc					
	Packaging:	50PCS					

YSV12MSERIES

Deduction curve and temperature




Minus output and input voltage curves












DC output plug

Standard plug :D1M

D1M		Pin Assignment	
			 C*+*
			Outside   Inside
			-V not connected to AC FG(standard) -V connected to AC FG(optional)

YSV12M SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style		Type No.	A	B	C	Quick Adapter Accessory
			OD	ID	L	
   (Straight)  (Right-angled)	D1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)	
	D1L	5.5	2.5	9.5		
	D1M	5.5	2.1	11.0		
	D1IR	5.5	2.5	9.5		
	D1JR	5.5	2.1	11.0		
	D1LR	5.5	2.5	9.5		
	D1MR	5.5	2.5	11.0		
Barrel Style		Type No.	A	B	C	Quick Adapter Accessory
			OD	ID	L	
   (Straight)  (Right-angled)	D2I	5.5	2.1	9.5	None	
	D2J	5.5	2.1	11.0		
	D2L	5.5	2.5	9.5		
	D2M	5.5	2.1	11.0		
	D2IR	5.5	2.5	9.5		
	D2JR	5.5	2.1	11.0		
	D2LR	5.5	2.5	9.5		
	D2MR	5.5	2.5	11.0		
Lock Style		Type No.	A	B	C	Quick Adapter Accessory
			OD	ID	L	
   SWITCHCRAFT original or equivalent	D2S(S761K)	5.53	2.03	12.06	None	
	D2K(761K)	5.53	2.54	12.06		
	D2C(S760K)	5.53	2.03	9.52		
	D2D(760K)	5.53	2.54	9.52		
Center Pin Style		Type No.	A	B	C	Quick Adapter Accessory
			OD	ID	L	
   EIAJ equivalent	D4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)
	D4B	6.5	4.4	11.0	1.4	
	D4C	7.4	5.1	11.0	0.6	
Min. Pin Style		Type No.	A	B	C	Quick Adapter Accessory
			OD	ID	L	
   EIAJ equivalent	D3A	2.35	0.7	11.0	Available (Current rating: 5A max.)	
	D3B	4.0	1.7	11.0		
	D3C	4.75	1.7	11.0		