
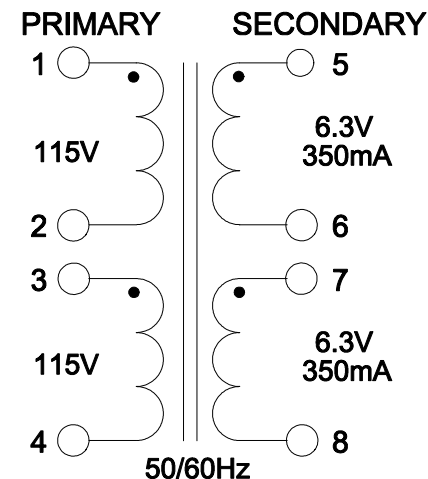


DIMENSIONS:	
A	1.688" ±0.031
B	1.250" ±0.031
C	1.450" ±0.063
D	0.018" X 0.041" ±0.005
E	1.100" ±0.031
F	0.125" X 0.030" ±0.005
G	0.250" ±0.031
H	1.670" ±0.031
J	0.460" ±0.031

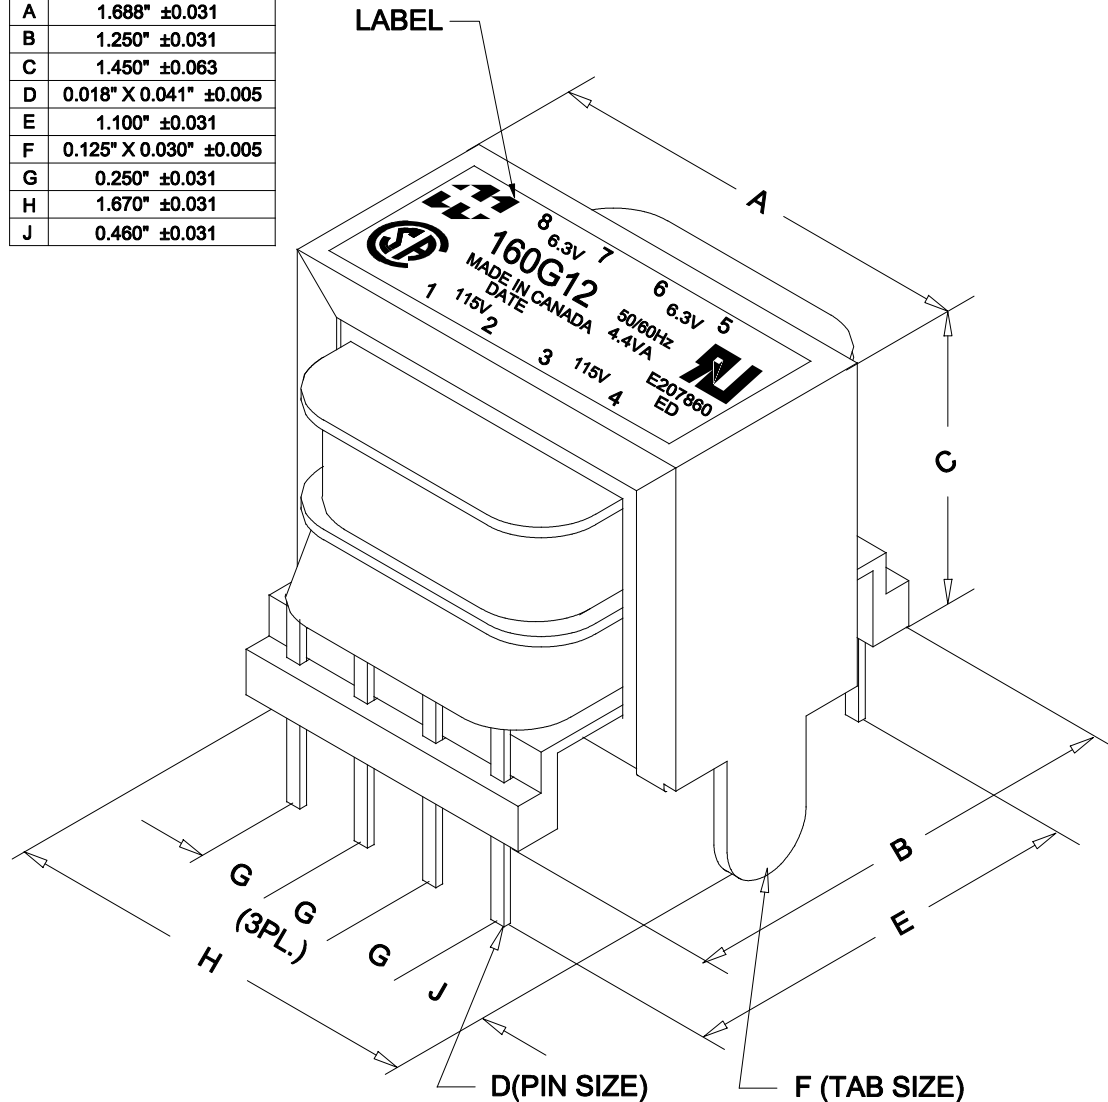

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	21.6mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	±2%
	PIN 5 - PIN 6 =	7.896V	±2%
	PIN 7 - PIN 8 =	7.896V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	361.6 Ω	±20%
	@ 20°C, PIN 3 - PIN 4 =	443.6 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	1.696 Ω	±20%
	@ 20°C, PIN 7 - PIN 8 =	1.696 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 04/21/16	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 160G12
			DATE: 04/21/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		