
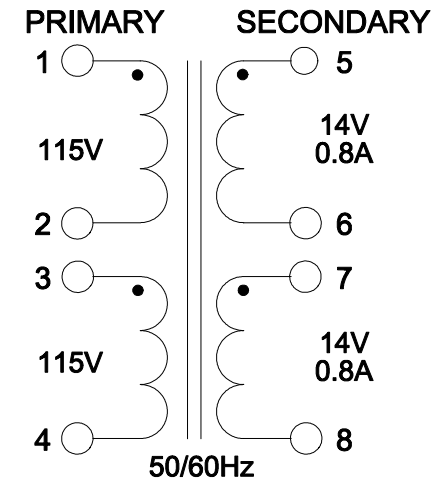


DIMENSIONS:	
A	1.625" ± 0.063
B	2.226" ± 0.063
C	1.375" ± 0.063
D	0.018" X 0.041" ± 0.005
E	2.100" ± 0.030
F	0.190" ± 0.005
G	0.250" ± 0.005

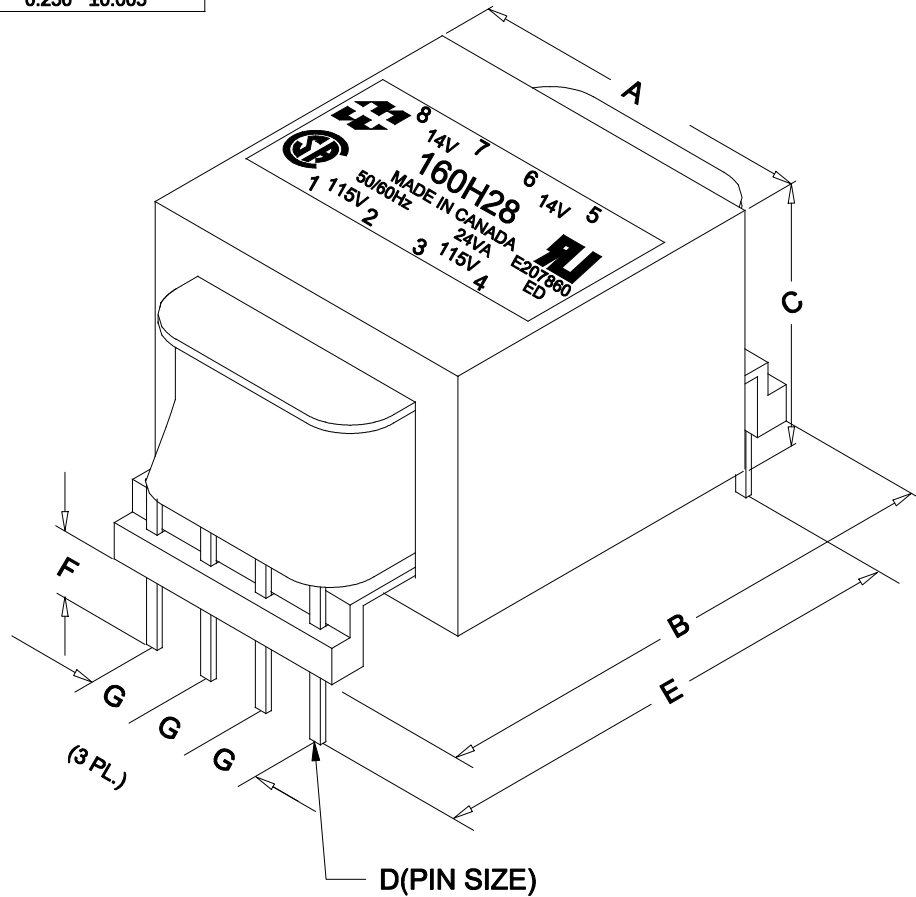

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	90mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	$\pm 2\%$
	PIN 5 - PIN 6 =	16.82V	$\pm 2\%$
	PIN 7 - PIN 8 =	16.82V	$\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	64.86 Ω	$\pm 20\%$
	@ 20°C, PIN 3 - PIN 4 =	69.26 Ω	$\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	1.790 Ω	$\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	1.790 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	08/10/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 160H28
			DATE: 08/10/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

HAMMOND
MANUFACTURING™

PH # (519) 886-6181
FAX # (519) 886-9540