
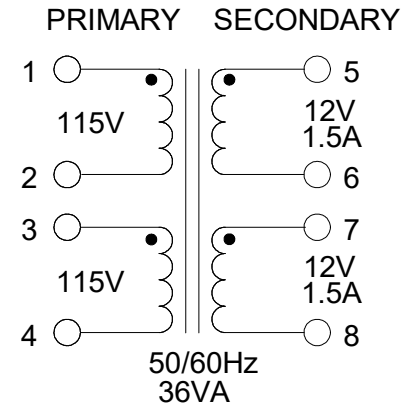


DIMENSIONS:	
L	2.625" ± 0.030
W	2.188" ± 0.030
H	1.563" ± 0.030
A	0.400" ± 0.030
B	0.400" ± 0.030
C	1.850" ± 0.030
D	0.041" x 0.018" ± 0.005
N	1.750" ± 0.030
P	2.188" ± 0.030

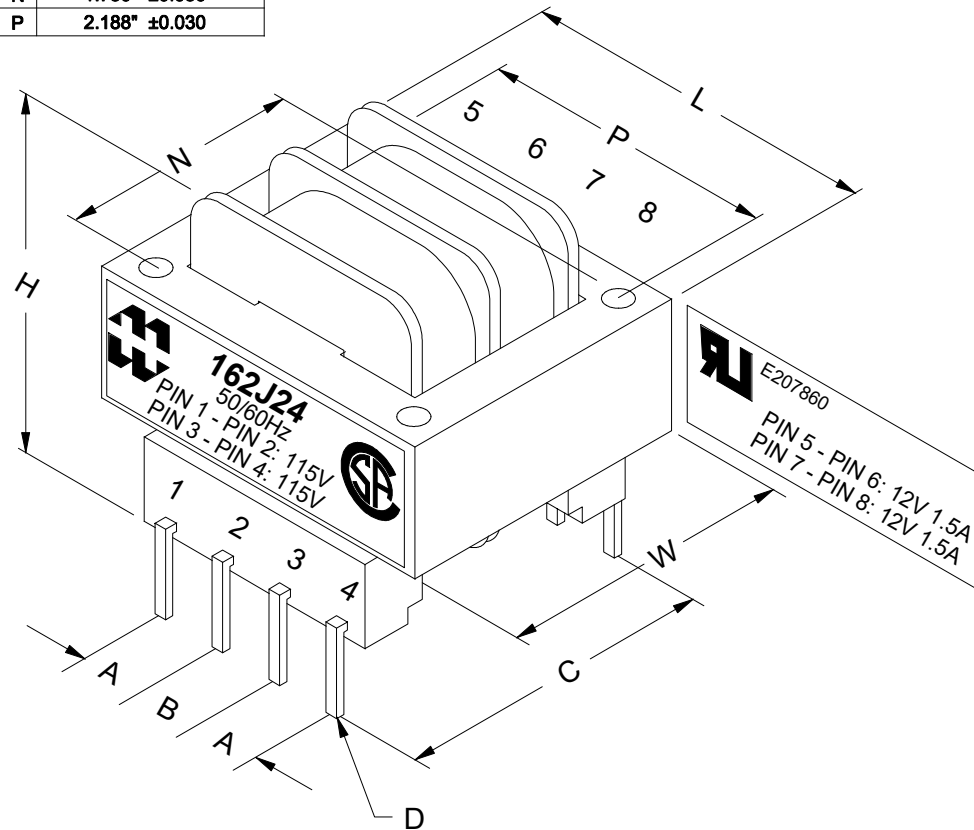

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	116.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	$\pm 2\%$
	PIN 5 - PIN 6 =	14.51V	$\pm 2\%$
	PIN 7 - PIN 8 =	14.51V	$\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	41.70 Ω	$\pm 20\%$
	@ 20°C, PIN 3 - PIN 4 =	41.70 Ω	$\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	0.663 Ω	$\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	0.663 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 01/09/23	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 162J24
			DATE: 01/09/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		