
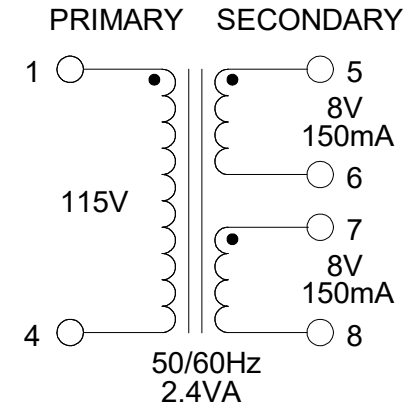


DIMENSIONS:	
L	1.375" ± 0.030
W	1.125" ± 0.030
H	1.188" ± 0.030
A	0.250" ± 0.030
B	0.250" ± 0.030
C	1.220" ± 0.030
D	0.041" x 0.018" ± 0.005

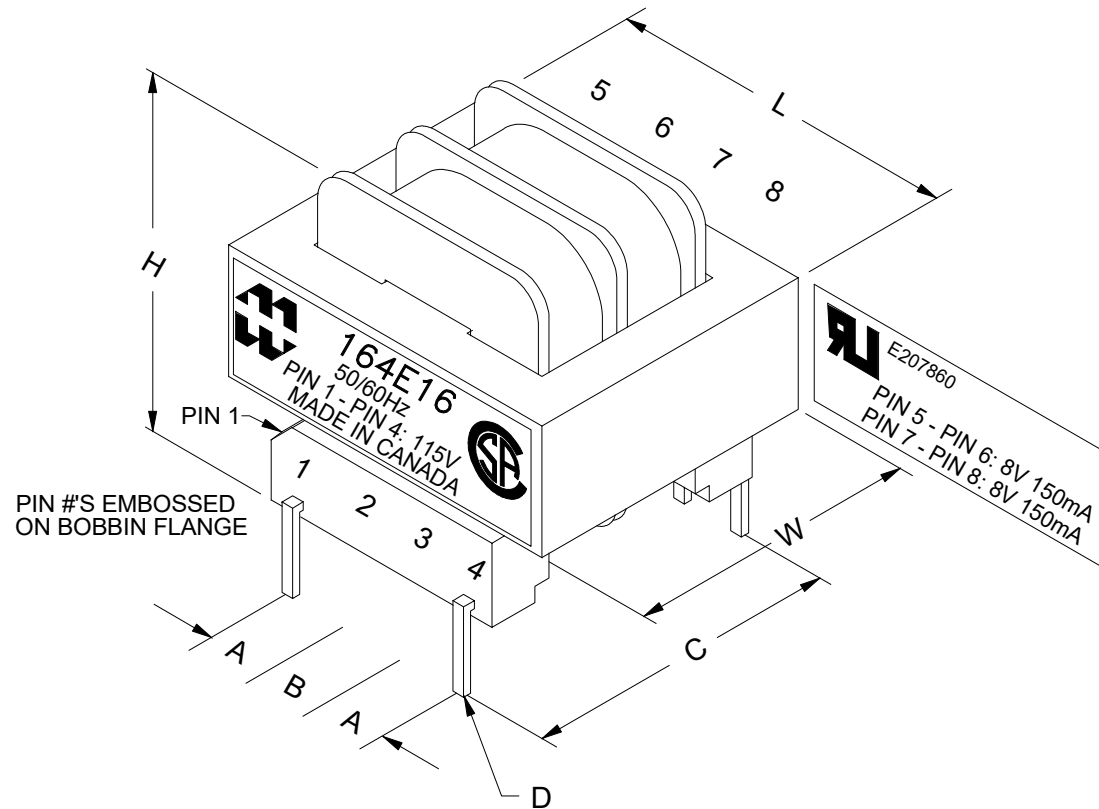

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 115V, 60Hz, PIN 1 - PIN 4	27.6mA Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 4	
	PIN 5 - PIN 6 =	9.426V $\pm 2\%$
	PIN 7 - PIN 8 =	9.426V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 4 =	281.9 Ω $\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	3.669 Ω $\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	3.669 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		
0	RELEASED.	C.I. 08/03/21	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			PH # (519) 886-6181 FAX # (519) 886-9540		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER
			DATE: 08/03/21	APP'D. BY:	DWG. NO. 164E16
				DIMENSIONS: IN(X) MM()	