
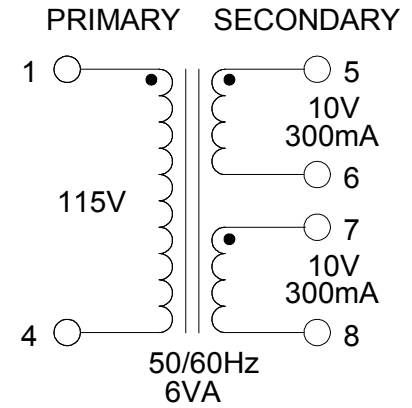


DIMENSIONS:	
L	1.625" ± 0.030
W	1.313" ± 0.030
H	1.313" ± 0.030
A	0.250" ± 0.030
B	0.350" ± 0.030
C	1.280" ± 0.030
D	0.041" x 0.018" ± 0.005
G	0.125" ± 0.005
M	1.063" ± 0.030

MOUNTING SCREW #4

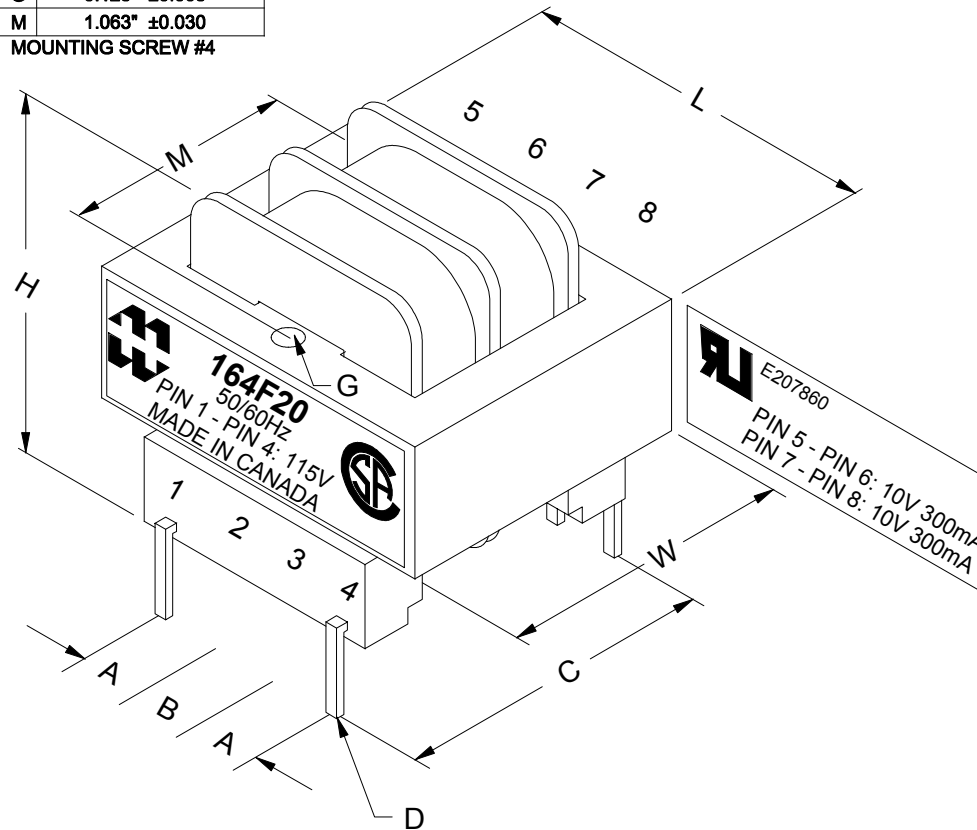

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 4	46.8mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 4		
	PIN 5 - PIN 6 =	11.96V	$\pm 2\%$
	PIN 7 - PIN 8 =	11.96V	$\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 4 =	127.1 Ω	$\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	2.753 Ω	$\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	2.753 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C.I.	07/02/19	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
				DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 164F20
				DATE: 07/02/19	APP'D. BY:		
				DIMENSIONS: IN(X) MM()			

PH # (519) 886-6181
FAX # (519) 886-9540