
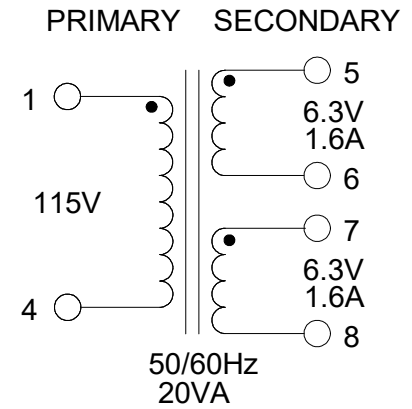


DIMENSIONS:	
L	2.250" ± 0.030
W	1.875" ± 0.030
H	1.438" ± 0.030
A	0.300" ± 0.030
B	0.400" ± 0.030
C	1.590" ± 0.030
D	0.041" x 0.018" ± 0.005
M	1.500" ± 0.030

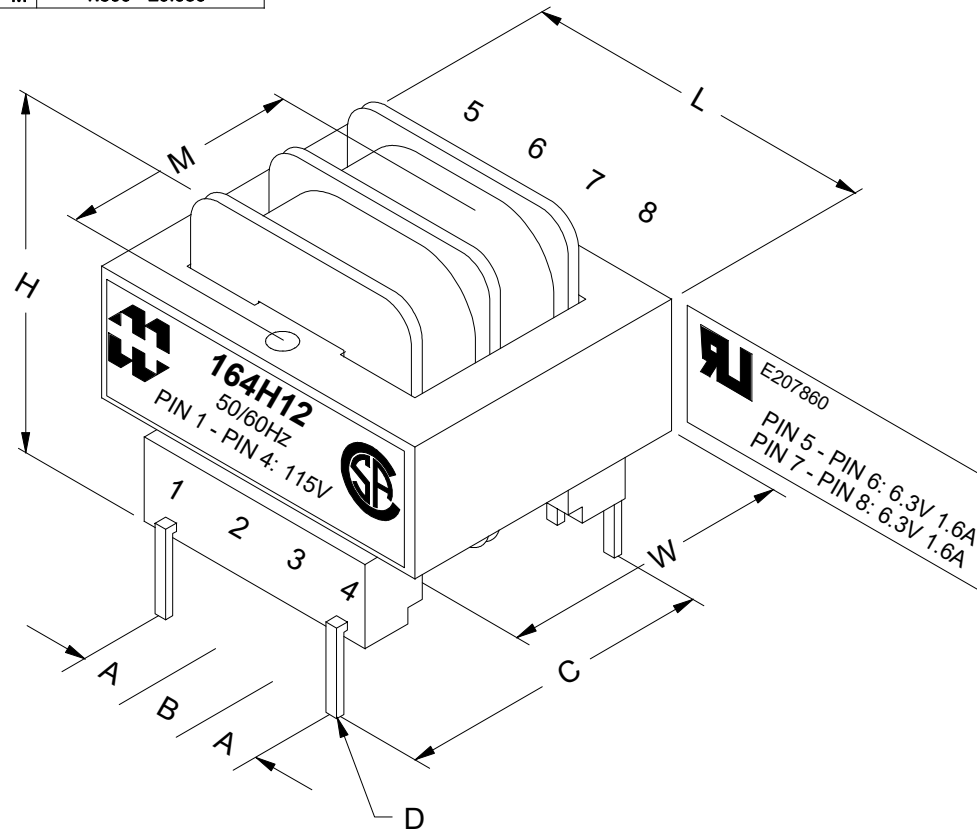

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 115V, 60Hz, PIN 1 - PIN 4	74.4mA Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 4	
	PIN 5 - PIN 6 =	7.704V $\pm 2\%$
	PIN 7 - PIN 8 =	7.704V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	34.31 Ω $\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	0.352 Ω $\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	0.352 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		
0	RELEASED. C.I.	05/31/23	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER
			DATE: 05/31/23	APP'D. BY:	DWG. NO. 164H12
				DIMENSIONS: IN(X) MM()	

PH # (519) 886-6181
FAX # (519) 886-9540