



DIMENSIONS:

A	3.250" ±0.063
B	1.625" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	0.701" ±0.063
F	2.326" ±0.063
G	0.187" ±0.015

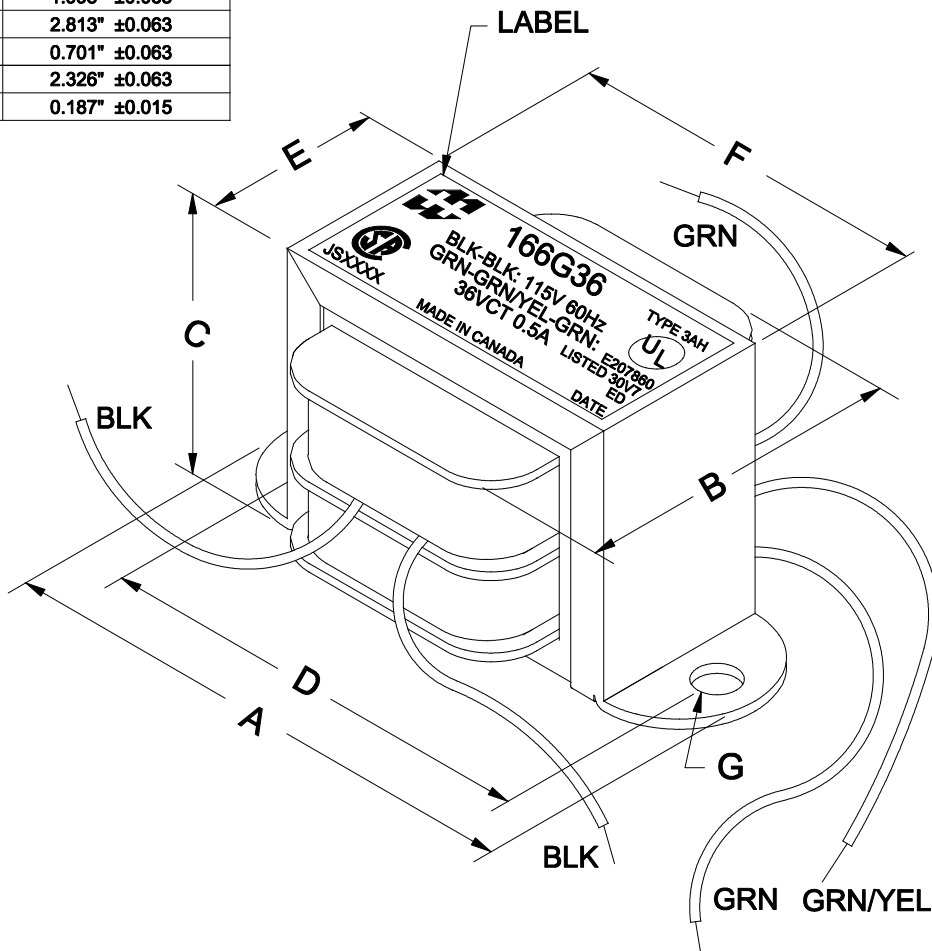

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"



APPROX. WEIGHT: 0.875LBS.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	78mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	41.12V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	20.56V ±2%
DCR	@ 20°C, BLK - BLK =	35.66 Ω ±20%
	@ 20°C, GRN - GRN =	4.958 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ™ ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
0	RELEASED.	C.I. 10/18/23	PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166G36
			DATE: 10/18/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		