

Distributed by:

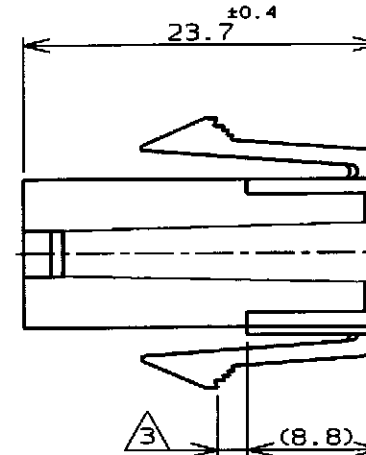
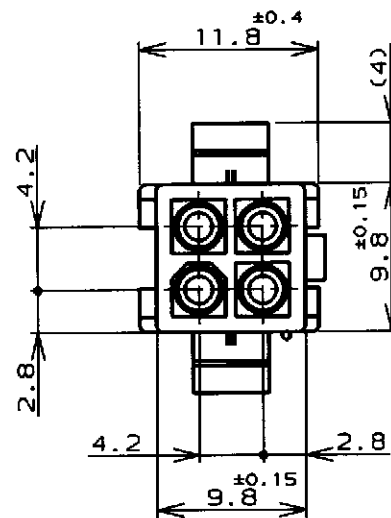

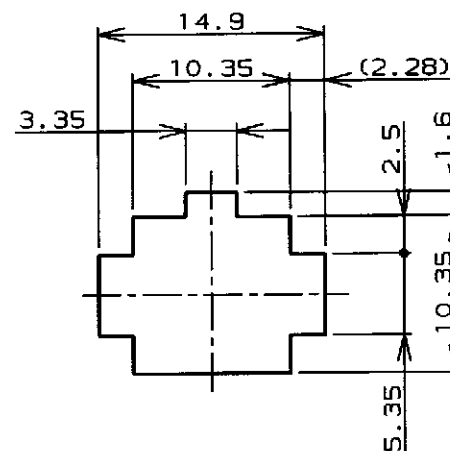
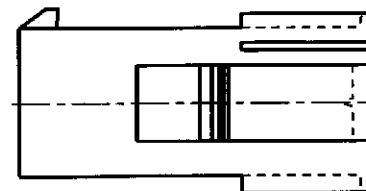
JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 495656

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
	D	再作成 (REDRAWN)	FJ00-0871-98	8 Jun 98	my	M.S

回路番号
(CIRCUIT NO.)キャビティマーク
(CAVITY MARK)トレードマーク
(TRADE MARK)寸法公差は±0.20
(TOLERANCE: ±0.20)パネル取付穴
(RECOMENDED PANEL OPENING DIMENSION)

注記;

1. 使用端子型番は170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は172167
3. 適用パネル厚 0.8~2.0mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
5. 表1参照

NOTE;

1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
2. MATING HSG P/N: 172167
3. APPLICABLE PANEL THICKNESS: 0.8~2.0mm
4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
5. SEE TABLE 1

表 1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
-AMP OR AMP	日本 (JAPAN)
-+AMP OR AMP	中国 (CHINA (PRC))

黒 (BLACK)	1-172159-9
青 (BLUE)	1- -6
緑 (GREEN)	1- -5
赤 (RED)	1- -2
自然色 (NATURAL)	172159-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 適合電線断面積	INSULATION DIA 被覆外径

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS 単位: 寸 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 (GENERAL TOLERANCE)
	±0.3
MATERIAL 材料	FINISH 仕上
66ナイロン UL94V-0 (66NYLON UL94V-0)	

OWN M. Yamazaki 8 Jun 98	CHK M. S. 15 Jun 98	APVD M. S. 15 Jun 98
PRODUCT SPEC 製品規格 108-5138		
INSTRUCTION SHEET 取り扱い説明書 IS-105J		
WEIGHT 重量		
CUSTOMER DRAWING		

AMP		日本エー・エム・ジー株式会社 Kawasaki, Japan	
NAME 名称 4極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0) 4Pos MINI UNIVERSAL MATE-N-LOCK CONN. CAP HOUSING (UL94V-0)			
SIZE 寸法	CAGE CODE 00779	DRAWING NO. 番号 C=172159	RESTRICTED TO
SCALE 尺度 2-1		SHEET 1 OF 1	REV D

参考図面