



DIMENSIONS:	
A	2.500" ± 0.063
B	2.685" ± 0.125
C	3.060" ± 0.063
D	2.000" ± 0.063
E	1.688" ± 0.063
G	0.203" X 0.375" ± 0.015

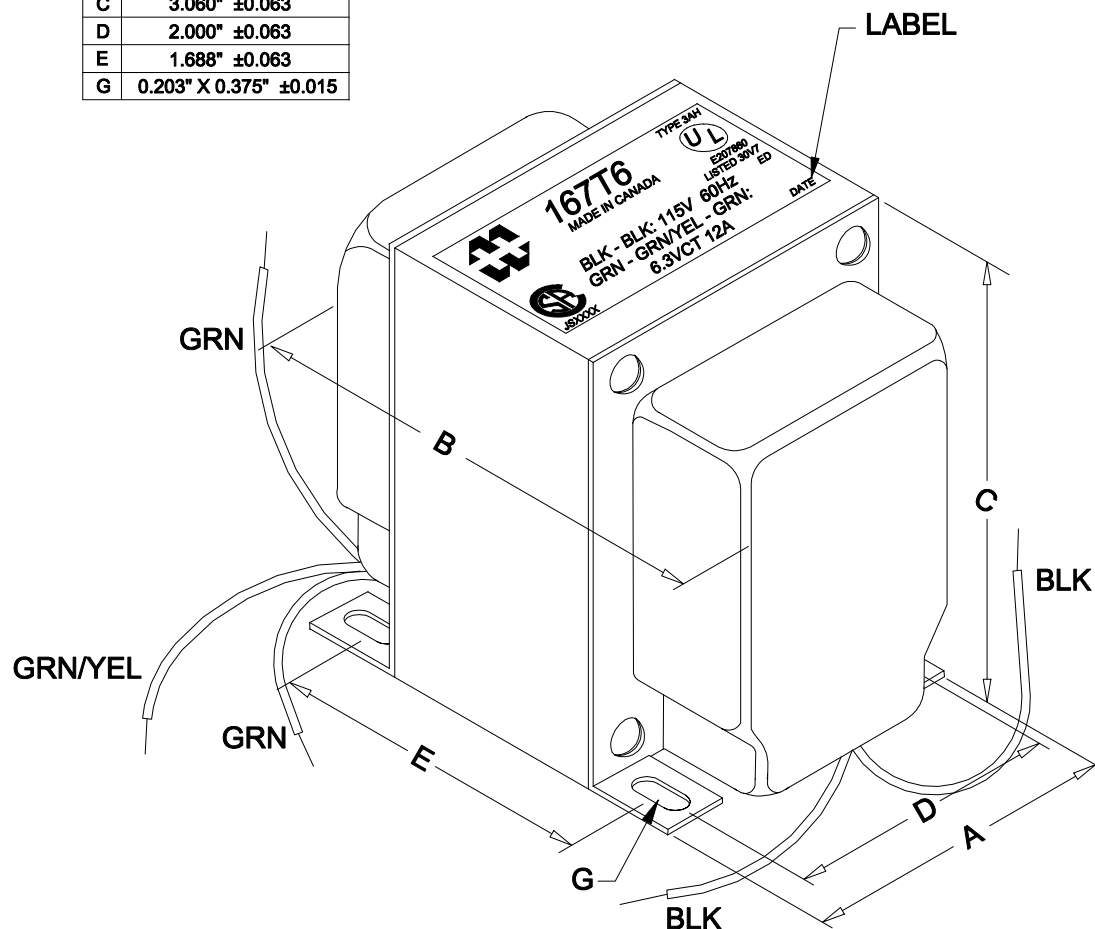

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	160mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	6.970V $\pm 2\%$
	GRN - GRN/YEL = GRN/YEL - GRN =	3.485V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	5.861 Ω $\pm 20\%$
	@ 20°C, GRN - GRN =	0.044 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 07/13/22	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 167T6
			DATE: 07/13/22	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		