
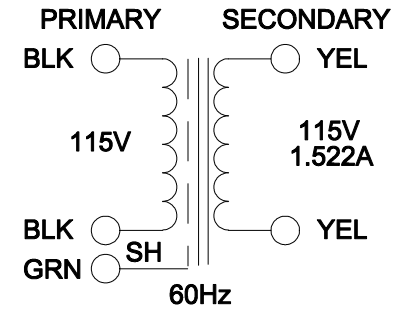


DIMENSIONS:

A	3.125" ±0.063
B	3.935" ±0.125
C	3.795" ±0.063
D	2.500" ±0.063
E	2.688" ±0.063
F	3.375" ±0.063
G	0.203" x 0.400" ±0.015

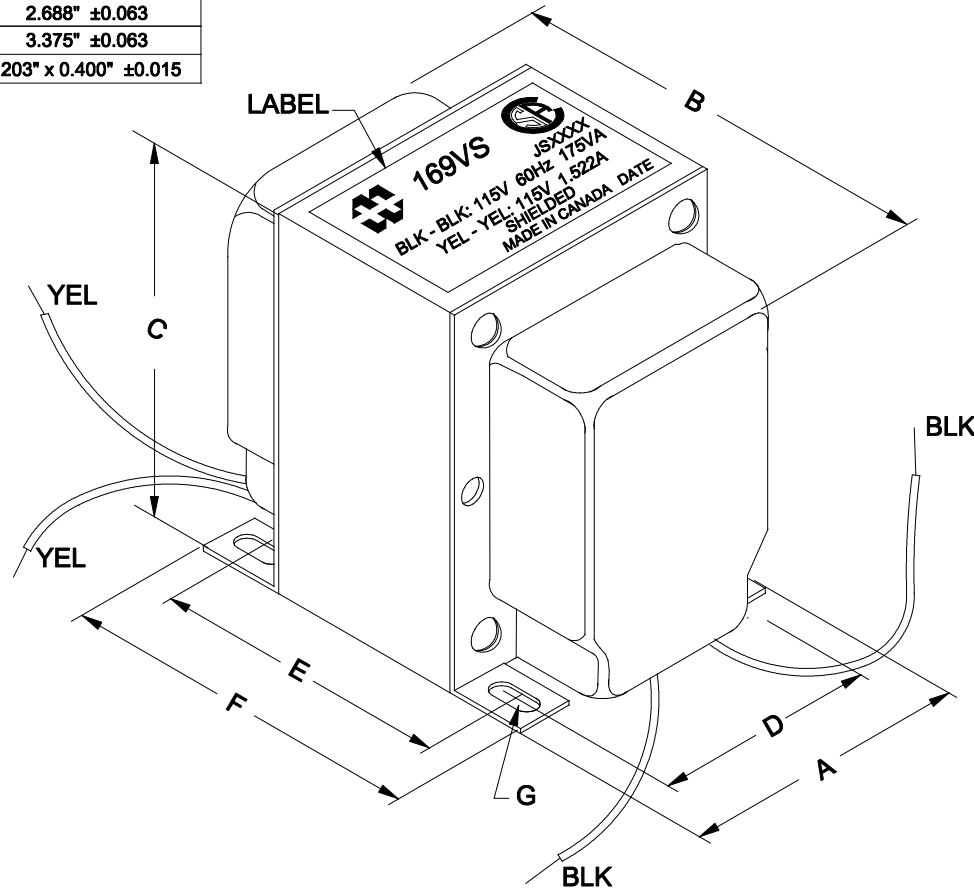

NOTE: ALL LEADS 9" OUT MIN. STRIPPED 0.5"
 RoHS COMPLIANT
 OPERATING TEMP.: -40°C TO 105°C
 STORAGE TEMP.: -40°C TO 85°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	490mA MAX.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	YEL - YEL =	120.6V ±2%
DCR	@ 20°C, BLK - BLK =	1.322 Ω ±20%
	@ 20°C, YEL - YEL =	1.608 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
0	RELEASED.	C.I. 04/03/23	PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: LINE ISOLATING TRANSFORMER	DWG. NO. 169VS
			DATE: 04/03/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		