

Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 524365

LOC AF	DIST 50	P	F	REVISIONS						
				ZONE	LTR	DESCRIPTION			DATE	APPD
					J	REV PER 0G1A-0147-99			3JUN99	JR JH

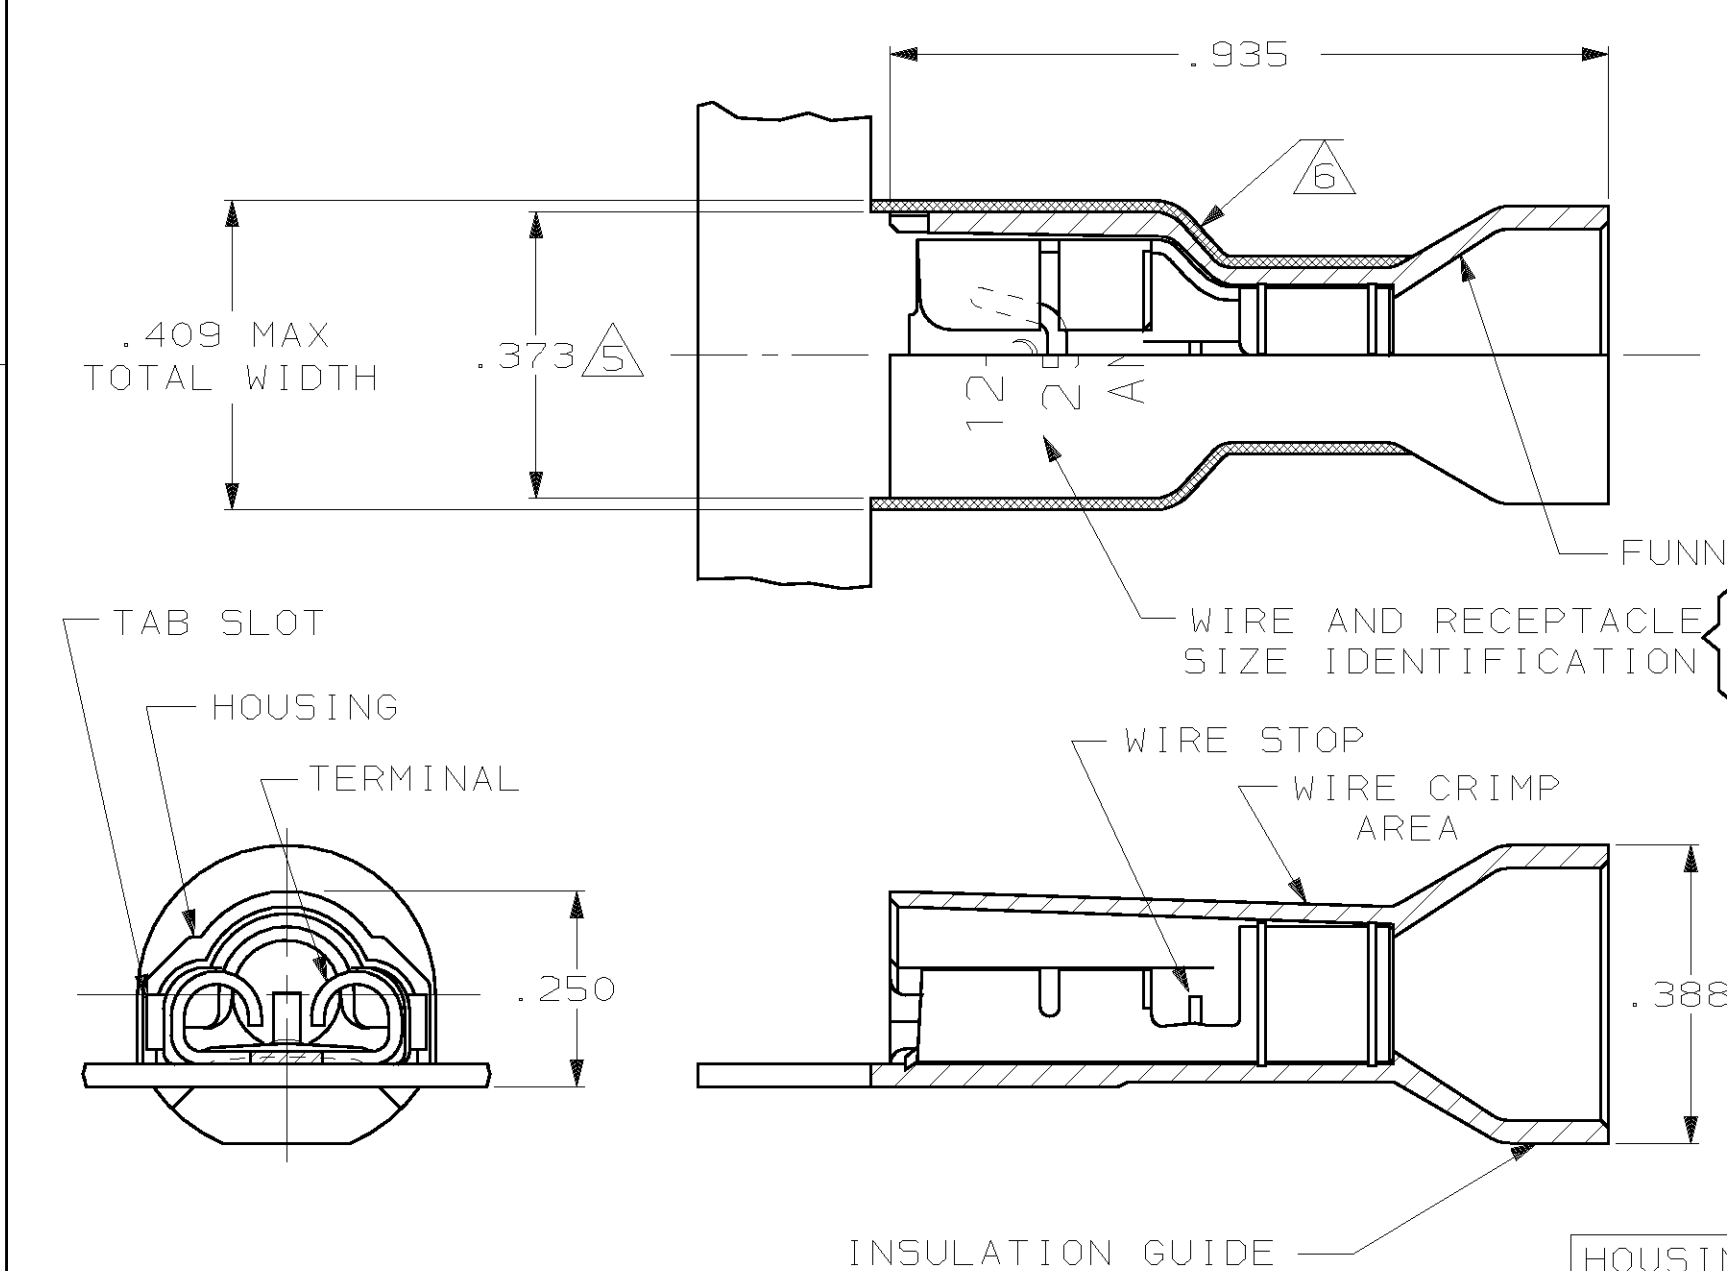

- 1 MATES WITH .032±.001×.250 TAB
- 2 WIRE STRIP LENGTH .312
- 3 INSULATION SIZE .320 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLACK		9-520447-2	
RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN			
HOUSING: NYLON, COLOR-YELLOW TRANSLUCENT		4-520447-2	
RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN			
MATERIAL & FINISH			PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 11/4/88 P FORTNEY	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 11/7/88 MS FEHER		
MATERIAL SEE TABLE	APPD 11/7/88 K RANDOLPH	NAME RECEPTACLE ASSEMBLY, ULTRA-FAST, .250 SERIES, 12-10 AWG	
	APPD 11/10/88 TL SHUTTER		
FINISH SEE TABLE	PRODUCT SPEC 108-2043	SIZE B	FSCM NO 00779
	APPLICATION SPEC 114-2123	DRAWING NO 520447	
WEIGHT -		SCALE 4:1	SHEET 1 OF 1