

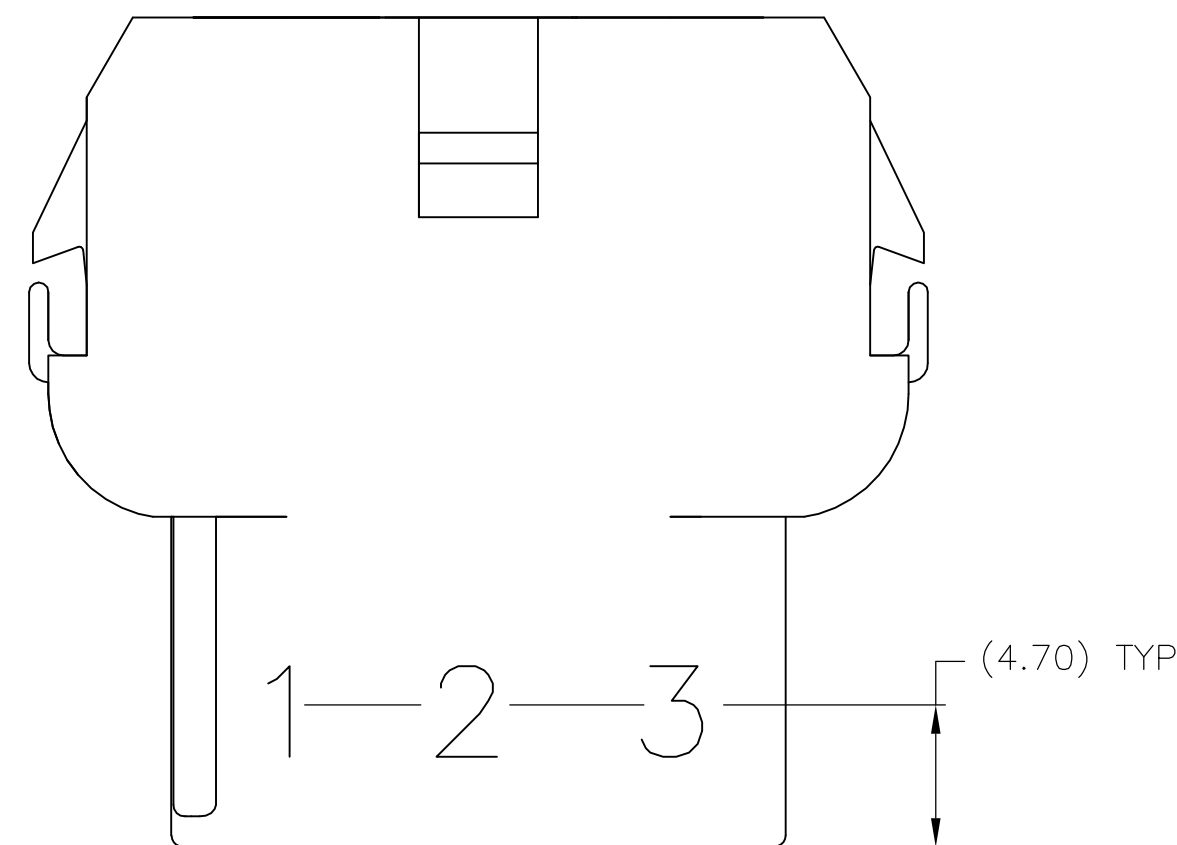
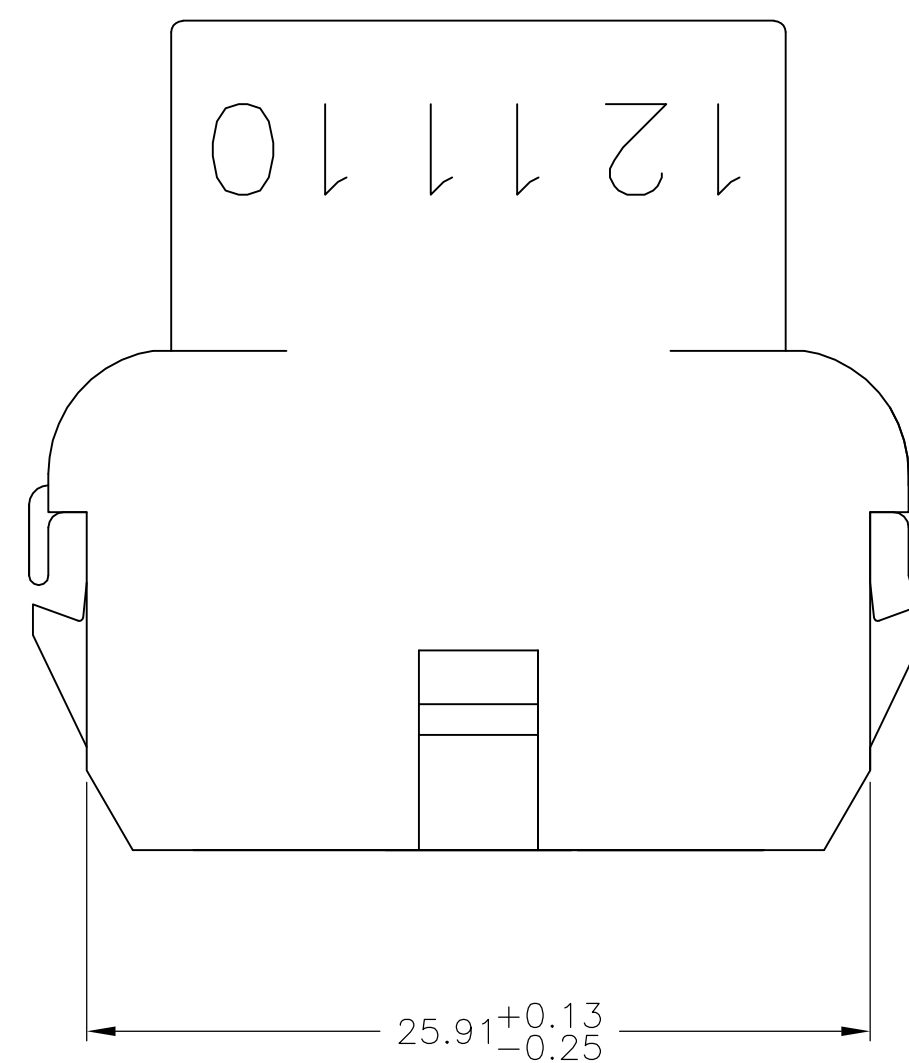
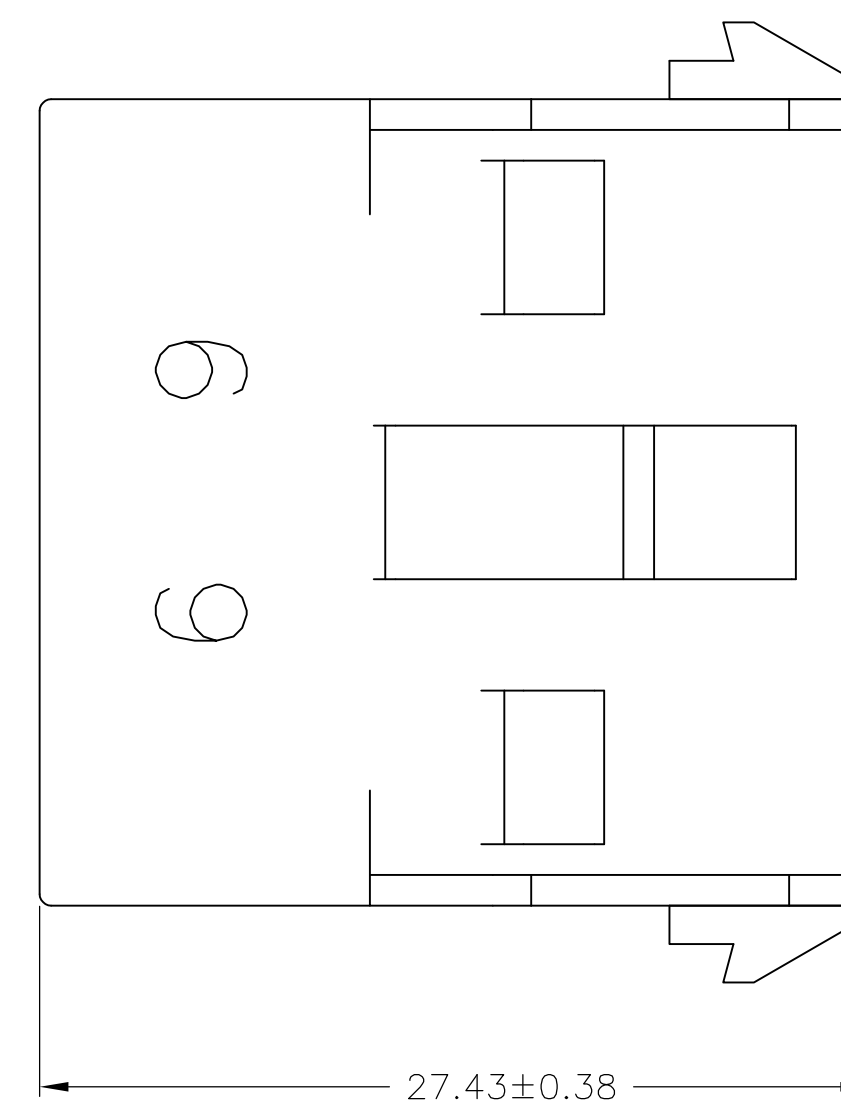


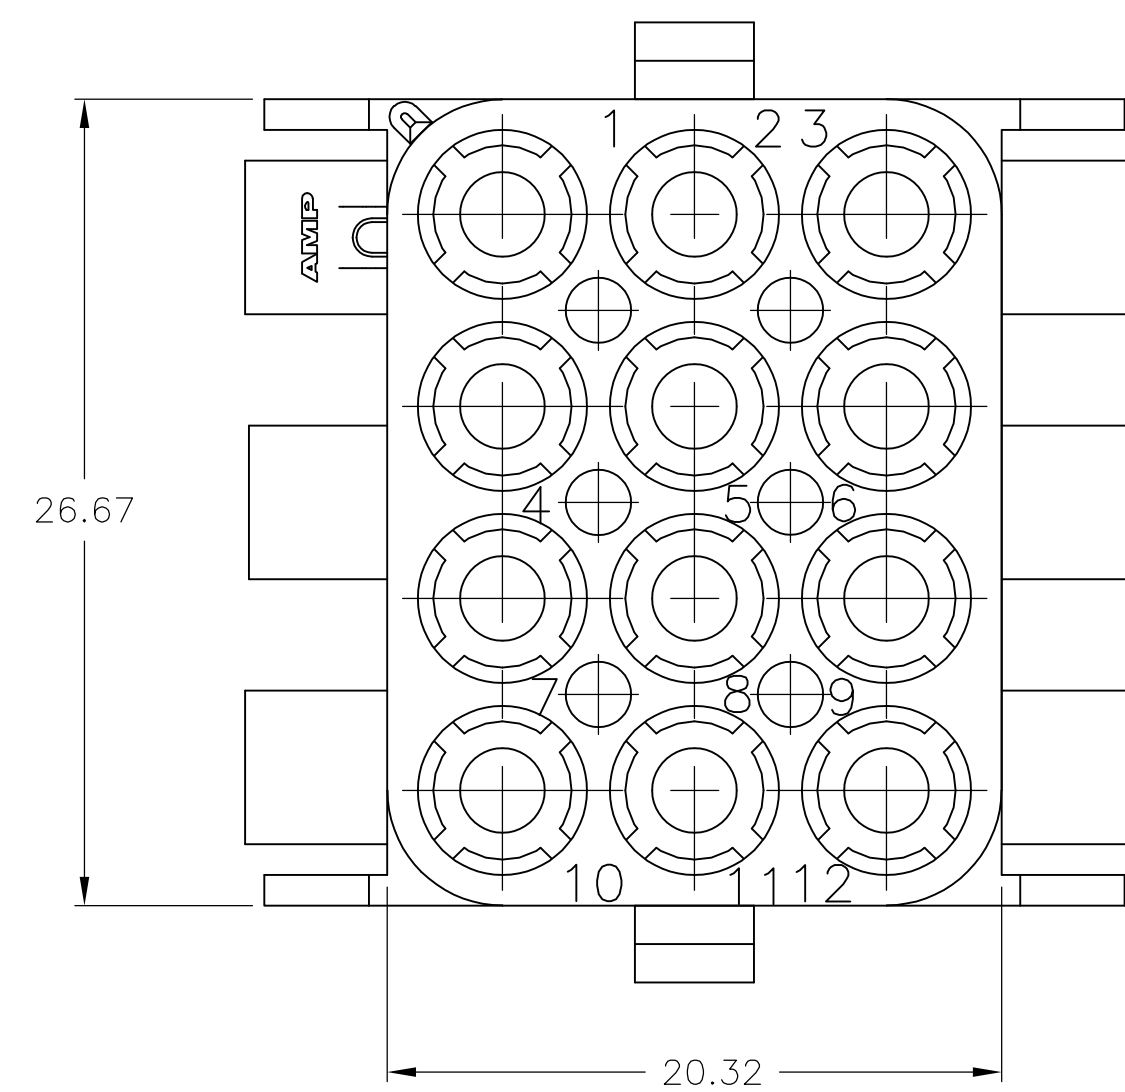



1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS.
ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

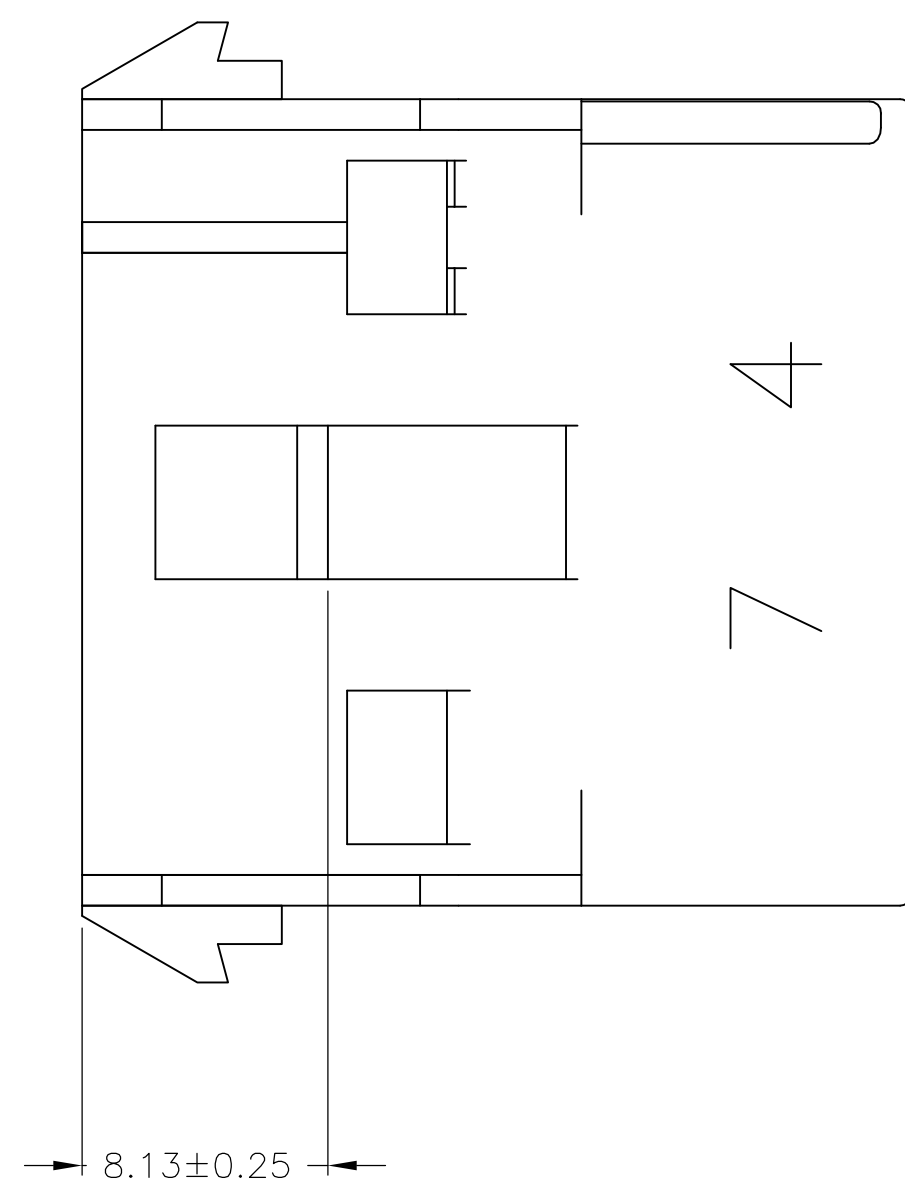

5.08	.200	—	—
4.70	.185	27.43	1.080
3.18	.125	26.67	1.050
0.38	.015	25.91	1.020
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN

CONVERSION TABLE



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	29JUL2004	 TE Connectivity	
DIMENSIONS:		QW S. RIDGILL	29JUL2004		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL	29JUL2004		
		NAME			
MATERIAL NYLON, UL94V-2		PRODUCT SPEC — APPLICATION SPEC — FINISH —		CAP, 12 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT	A1 00779 C-480709		
CUSTOMER DRAWING		SCALE		SHEET	REV
		1:1		2 of 2	A1