
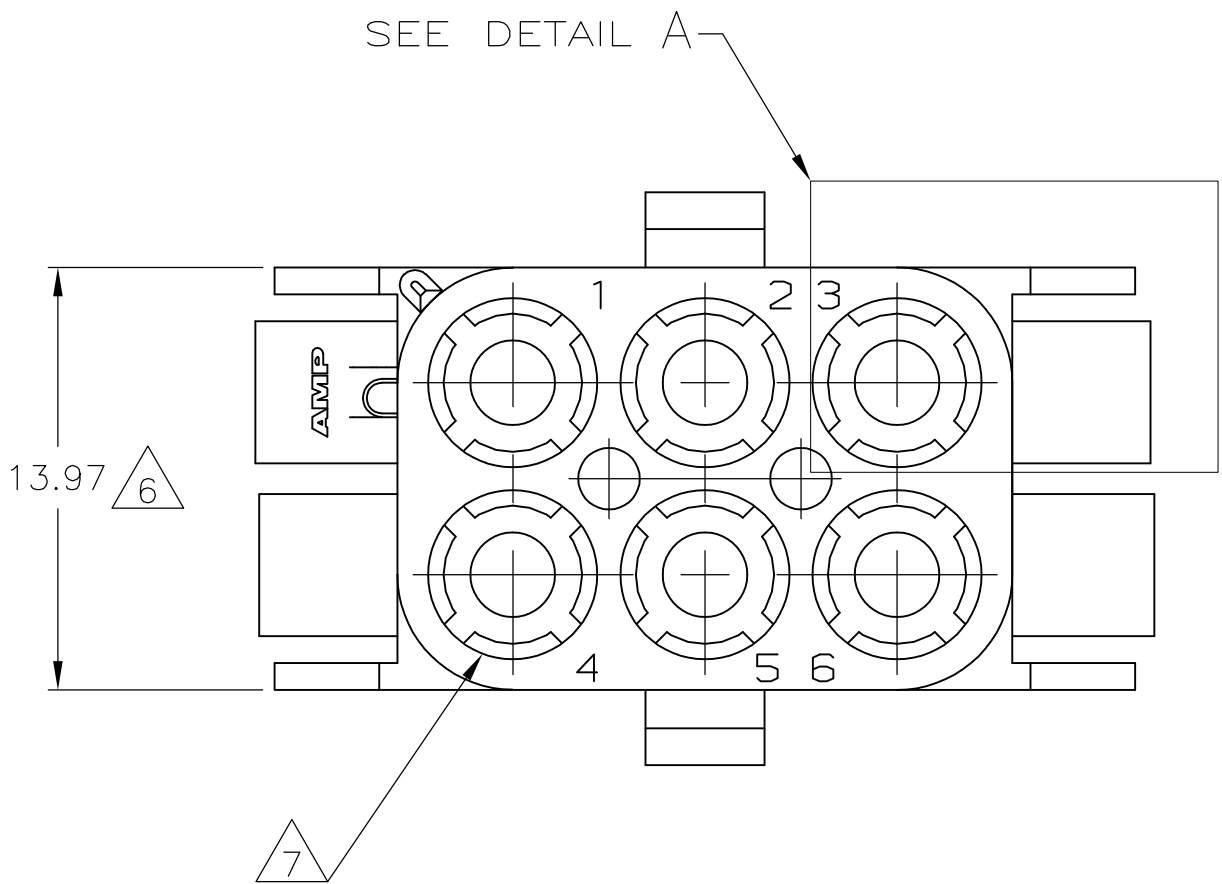
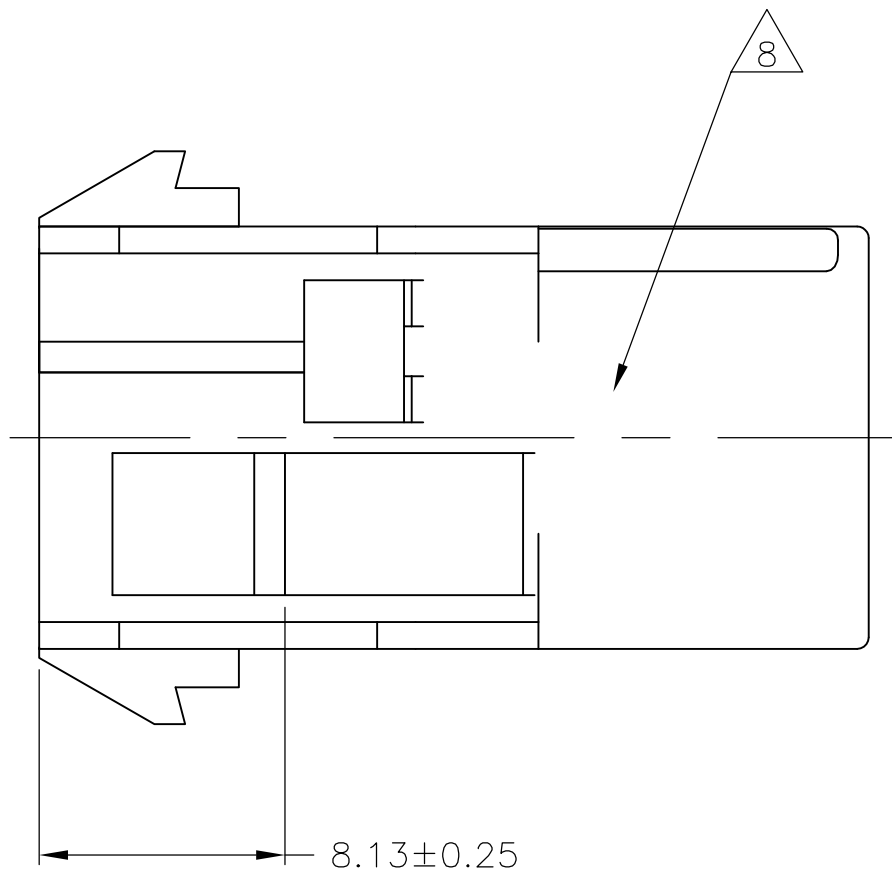



LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			AP3	REVISED PER ECR-11-020221			10OCT11	KH	TM

D


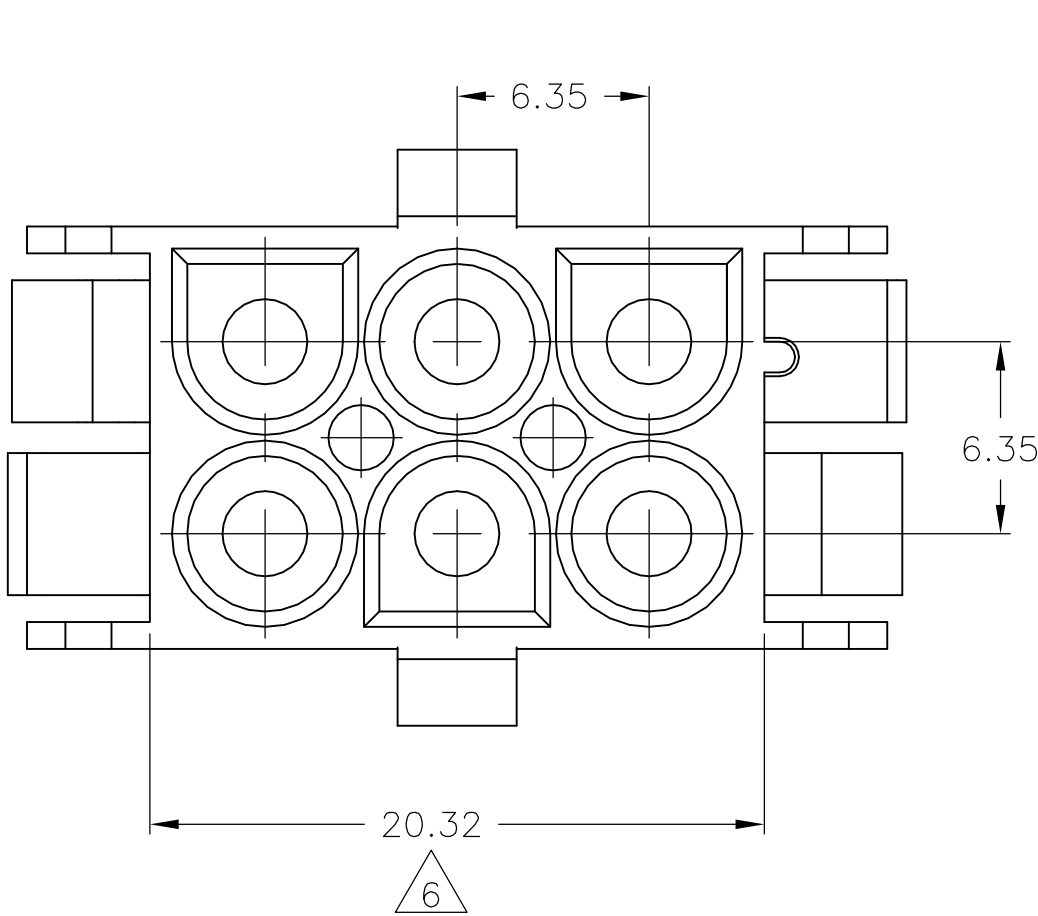


- 1
- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- 2
- RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- 3
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5
- CIRCUIT NUMBER 1 LOCATION.
- 6
- DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 7
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

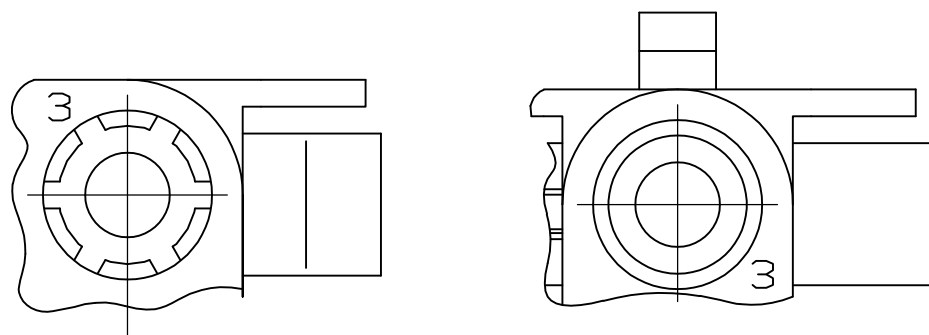


DETAIL A
OPTIONAL CONSTRUCTIONS

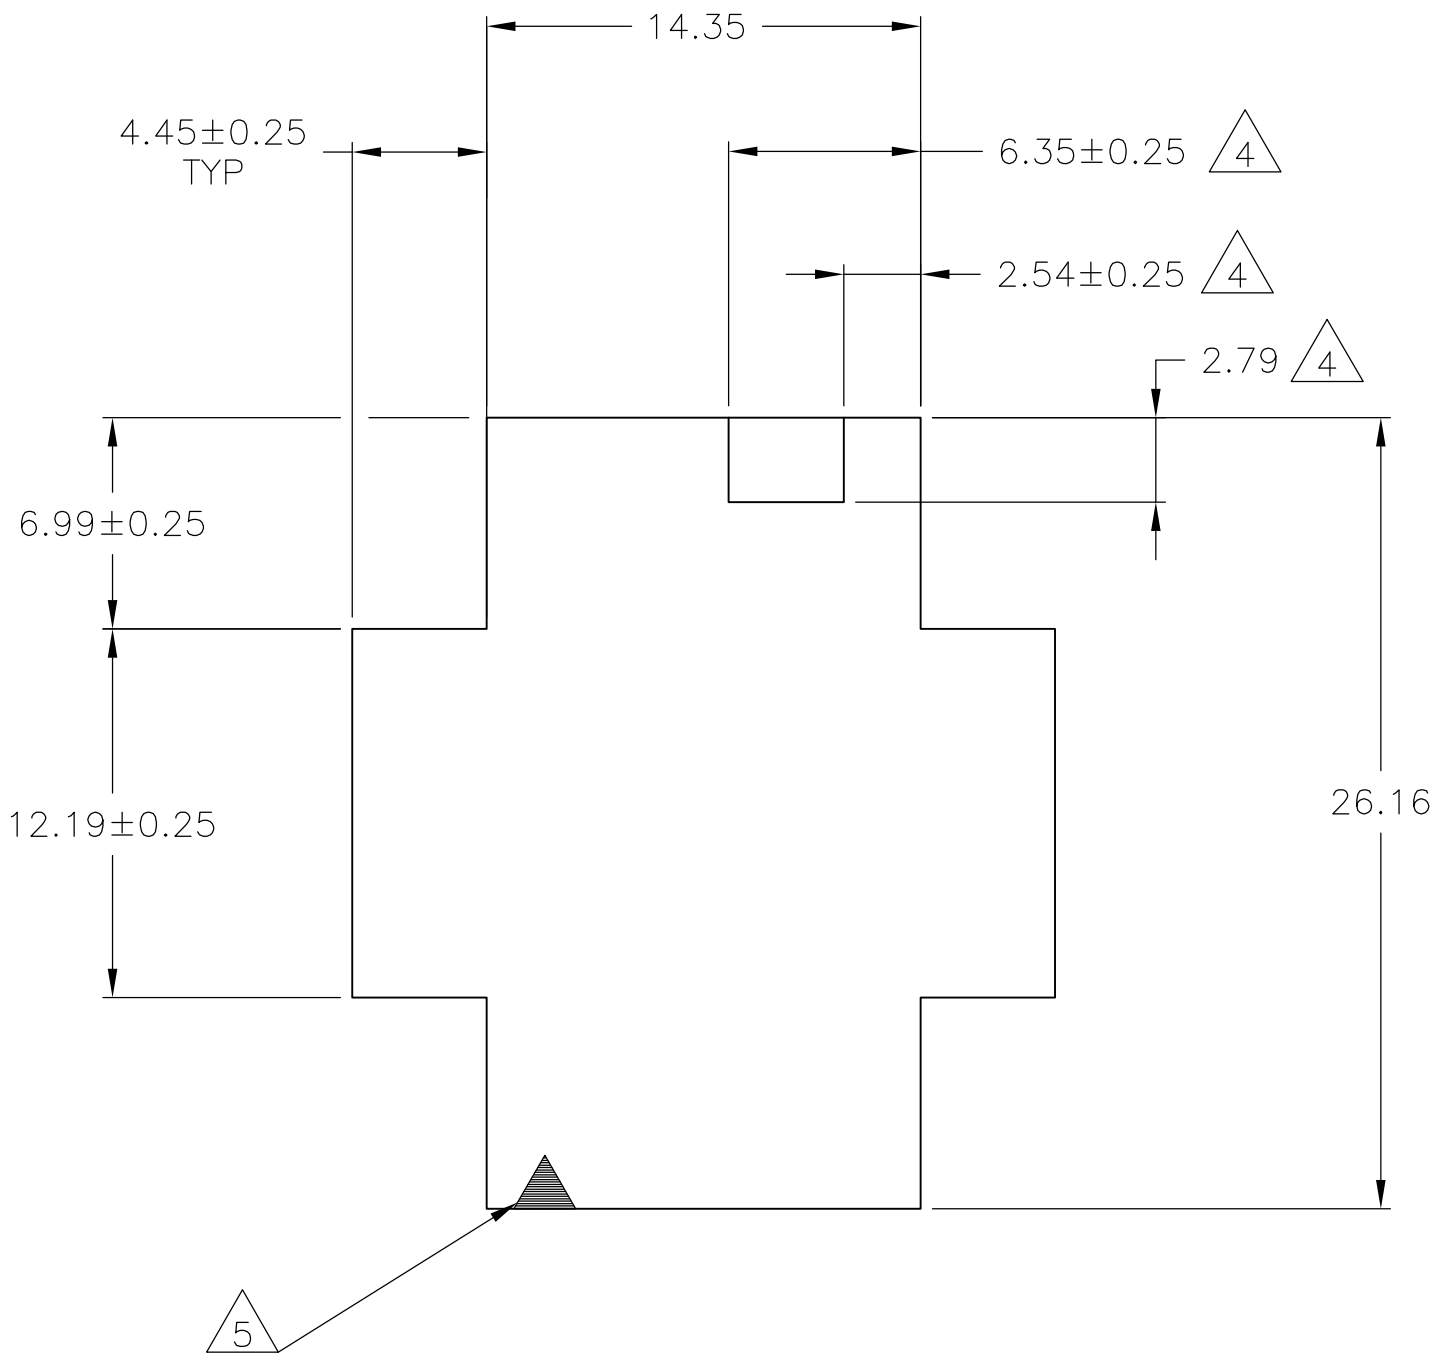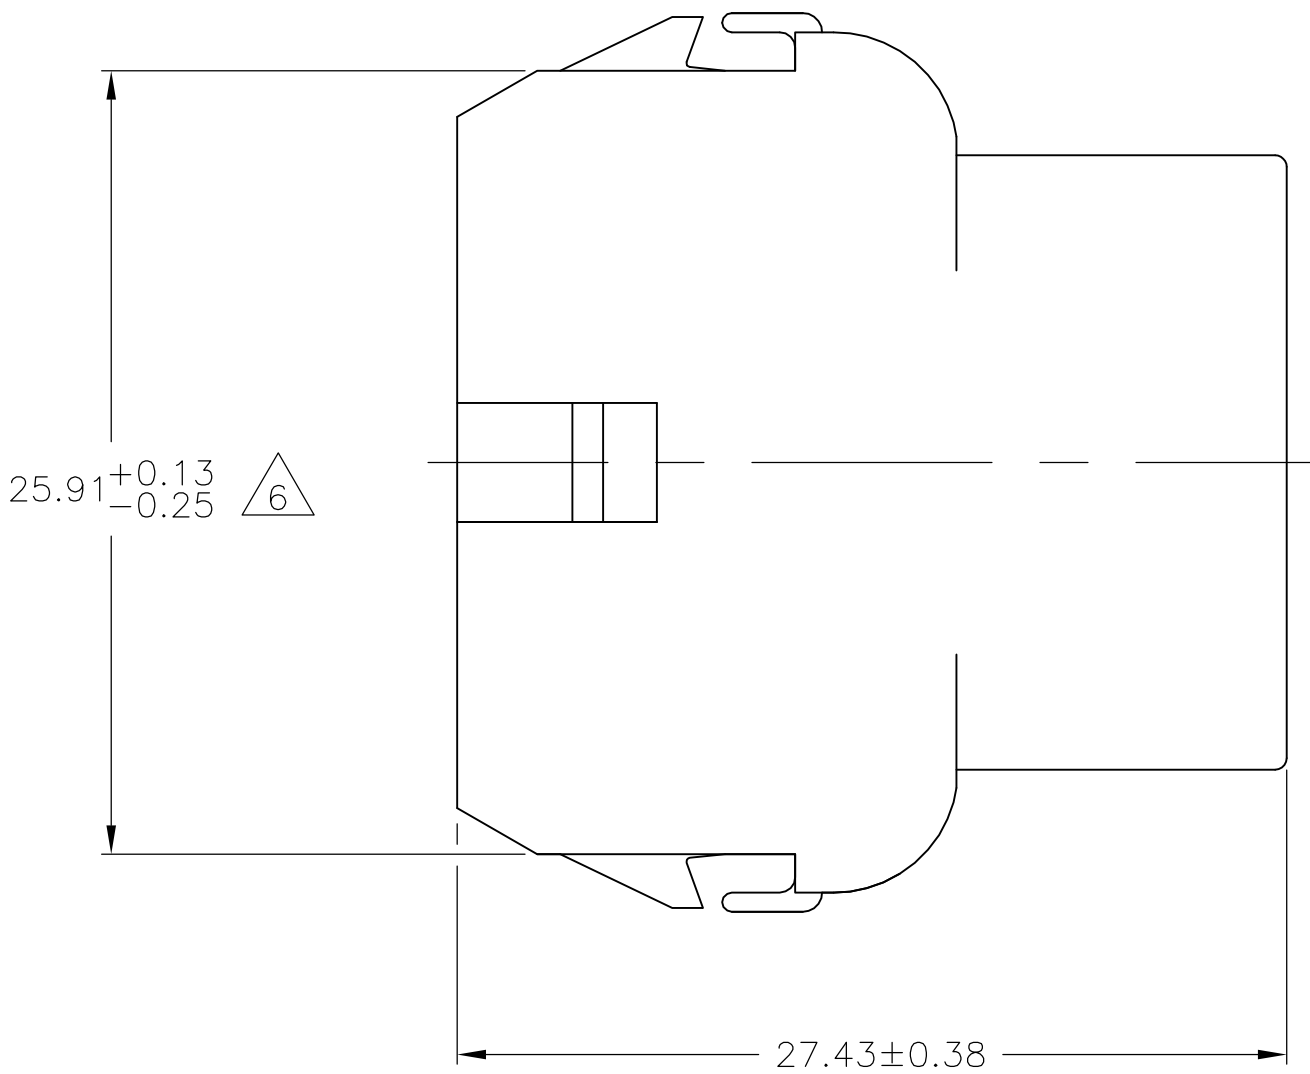

RECOMMENDED PANEL CUT OUT

B

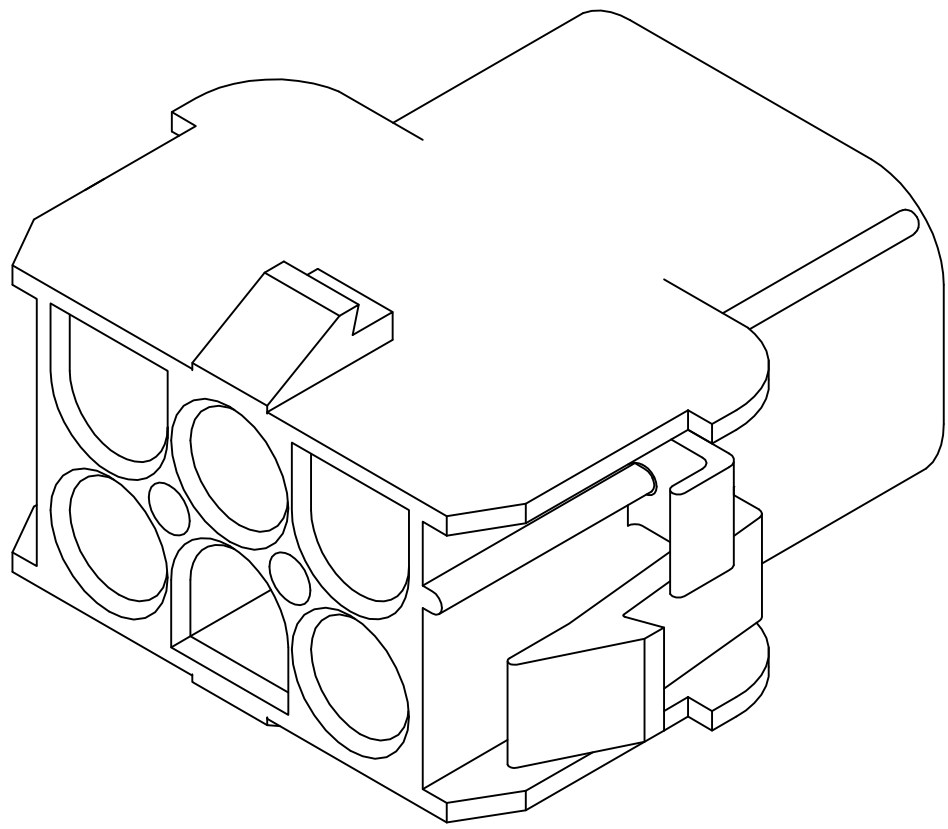

3-DIMENSIONAL MODEL
NTS


6.35	.250	27.43	1.080
4.45	.175	26.16	1.030
2.79	.110	25.91	1.020
2.54	.100	20.32	.800
2.29	.090	14.35	.565
0.76	.030	13.97	.550
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN
CONVERSION TABLE			

D

C

B

A








9 OBSOLETE	BLACK	1-480705-9
	GREY	1-480705-8
	BLUE	1-480705-6
	GREEN	1-480705-5
	YELLOW	1-480705-4
9 OBSOLETE	ORANGE	1-480705-3
	RED	1-480705-2
	BROWN	1-480705-1
	NATURAL	1-480705-0
	COLOR	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 28JUL04	TE Connectivity	
		CHK S. RIDGILL 28JUL04		
		APVD S. RIDGILL 28JUL04	NAME	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		0. PLC ± -	APPLICATION SPEC	
		1. PLC ± -	WEIGHT	
		2. PLC ± 0.127	SIZE	
		3. PLC ± -	CAGE CODE	
		4. PLC ± -	DRAWING NO	
		ANGLES ± ± 0°30'	RESTRICTED TO	
MATERIAL NYLON, UL94V-2		FINISH -	A100779C=480705	
			CUSTOMER DRAWING	
			SCALE 4:1	
			SHEET 1 OF 2	
			REV AP3	

LOC		DIST		REVISIONS					
P	T	LTR	DESCRIPTION	DATE	DWN	APVD			
CM		00					-	SEE SHEET 1	-

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

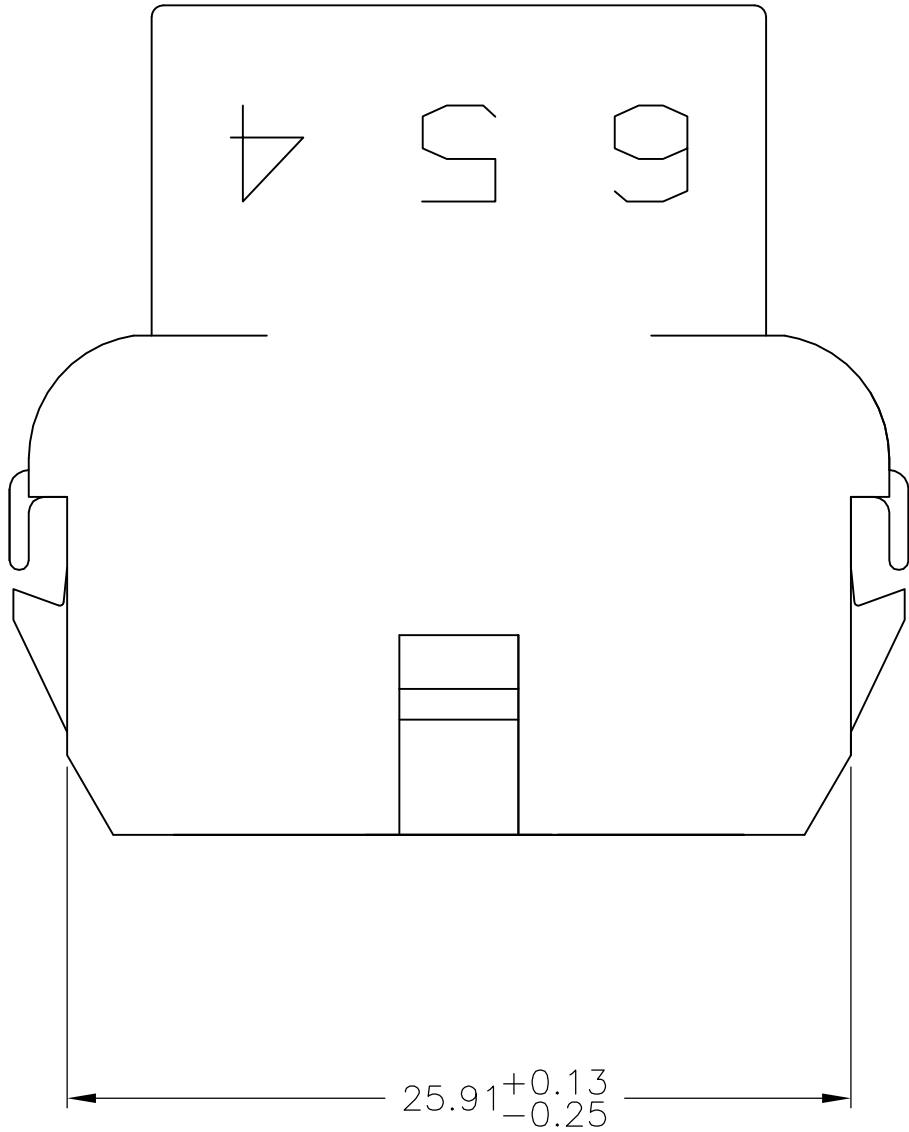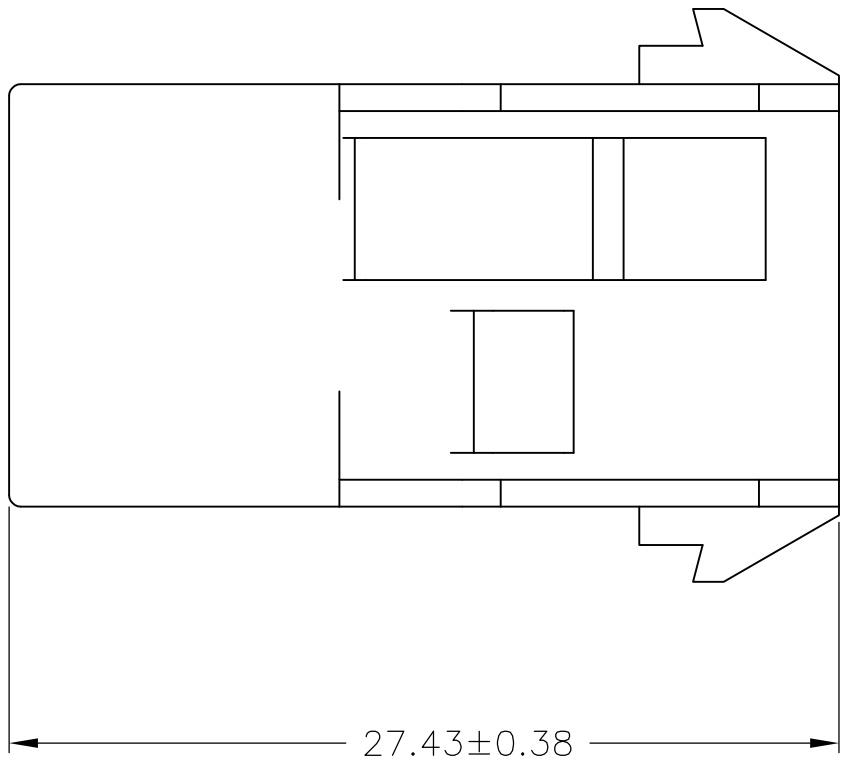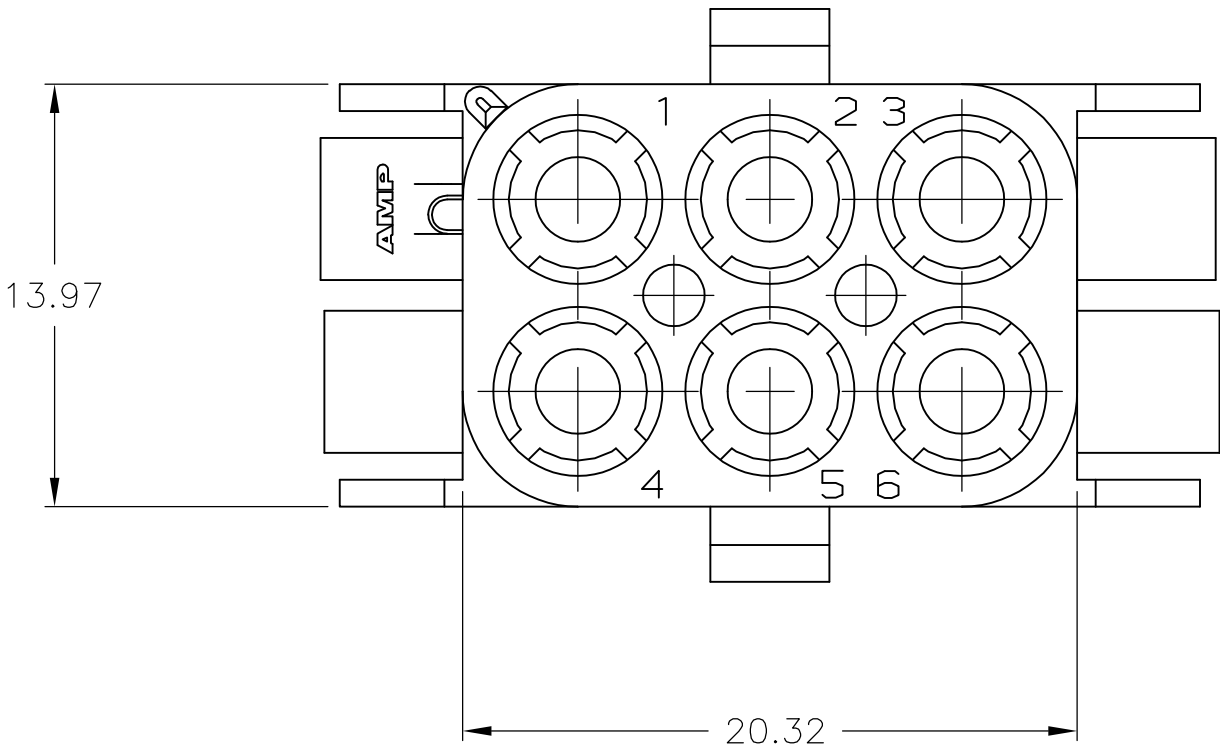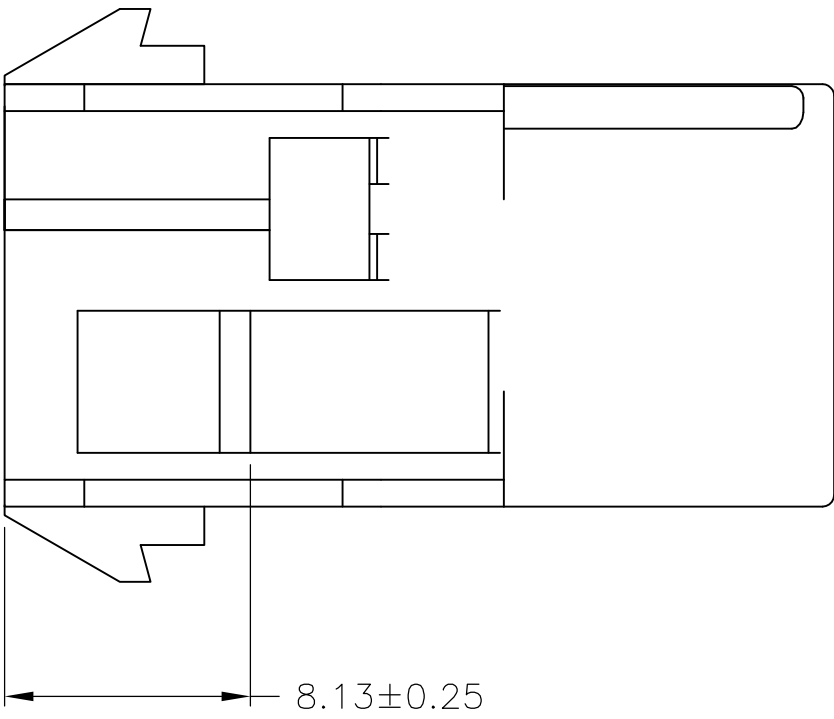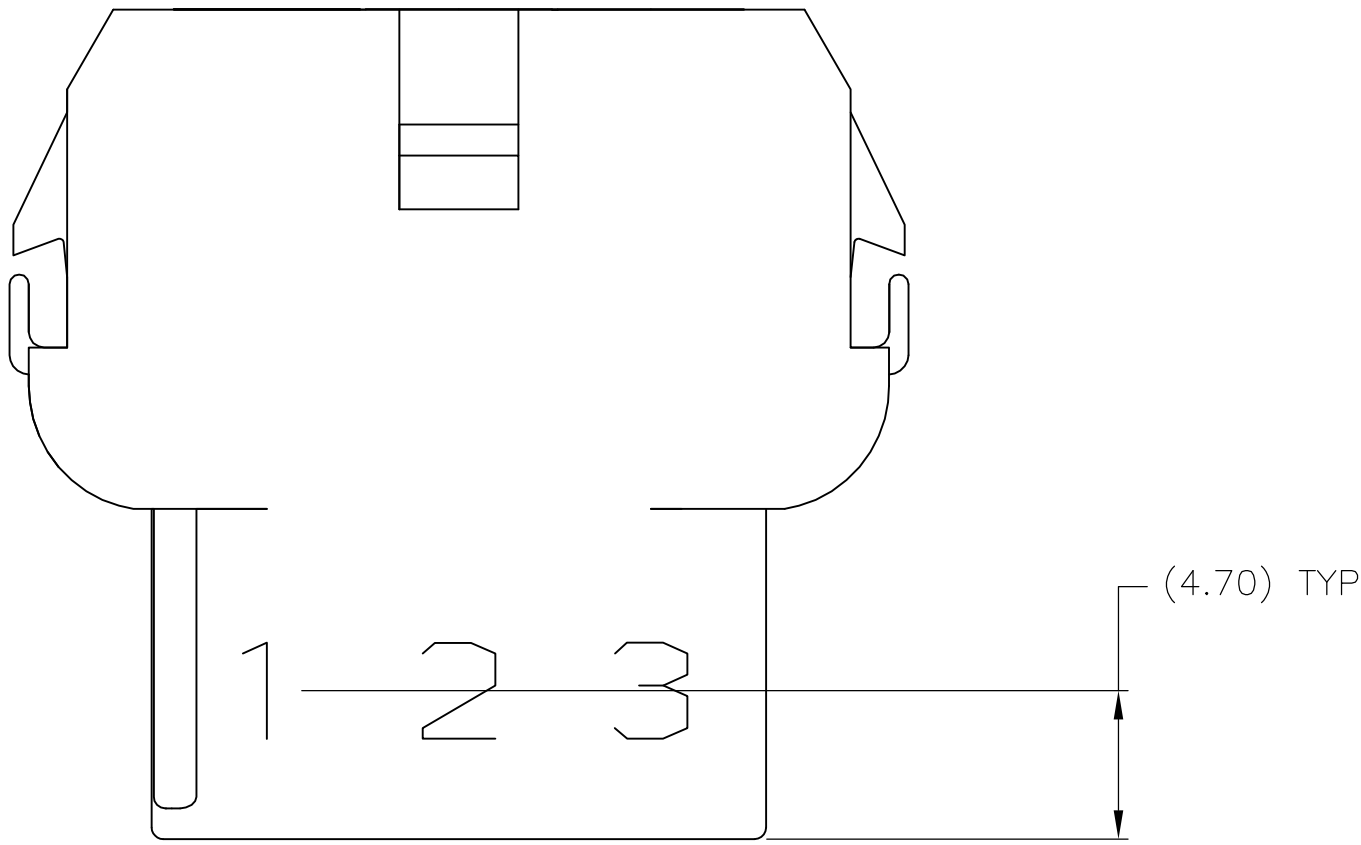

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	NATURAL		2-480705-0	
		CHK S. RIDGILL	28JUL04	COLOR		PART NO.	
		APVD S. RIDGILL	28JUL04	NAME		CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE	
		0. PLC ± -		APPLICATION SPEC		CAGE CODE	
		1. PLC ± -		WEIGHT		DRAWING NO	
		2. PLC ± 0.127				RESTRICTED TO	
		3. PLC ± -					
		4. PLC ± -					
		ANGLES ± 0°30'					
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE	
						4:1	
						SHEET	
						2 OF 2	
						REV	
						AP3	