


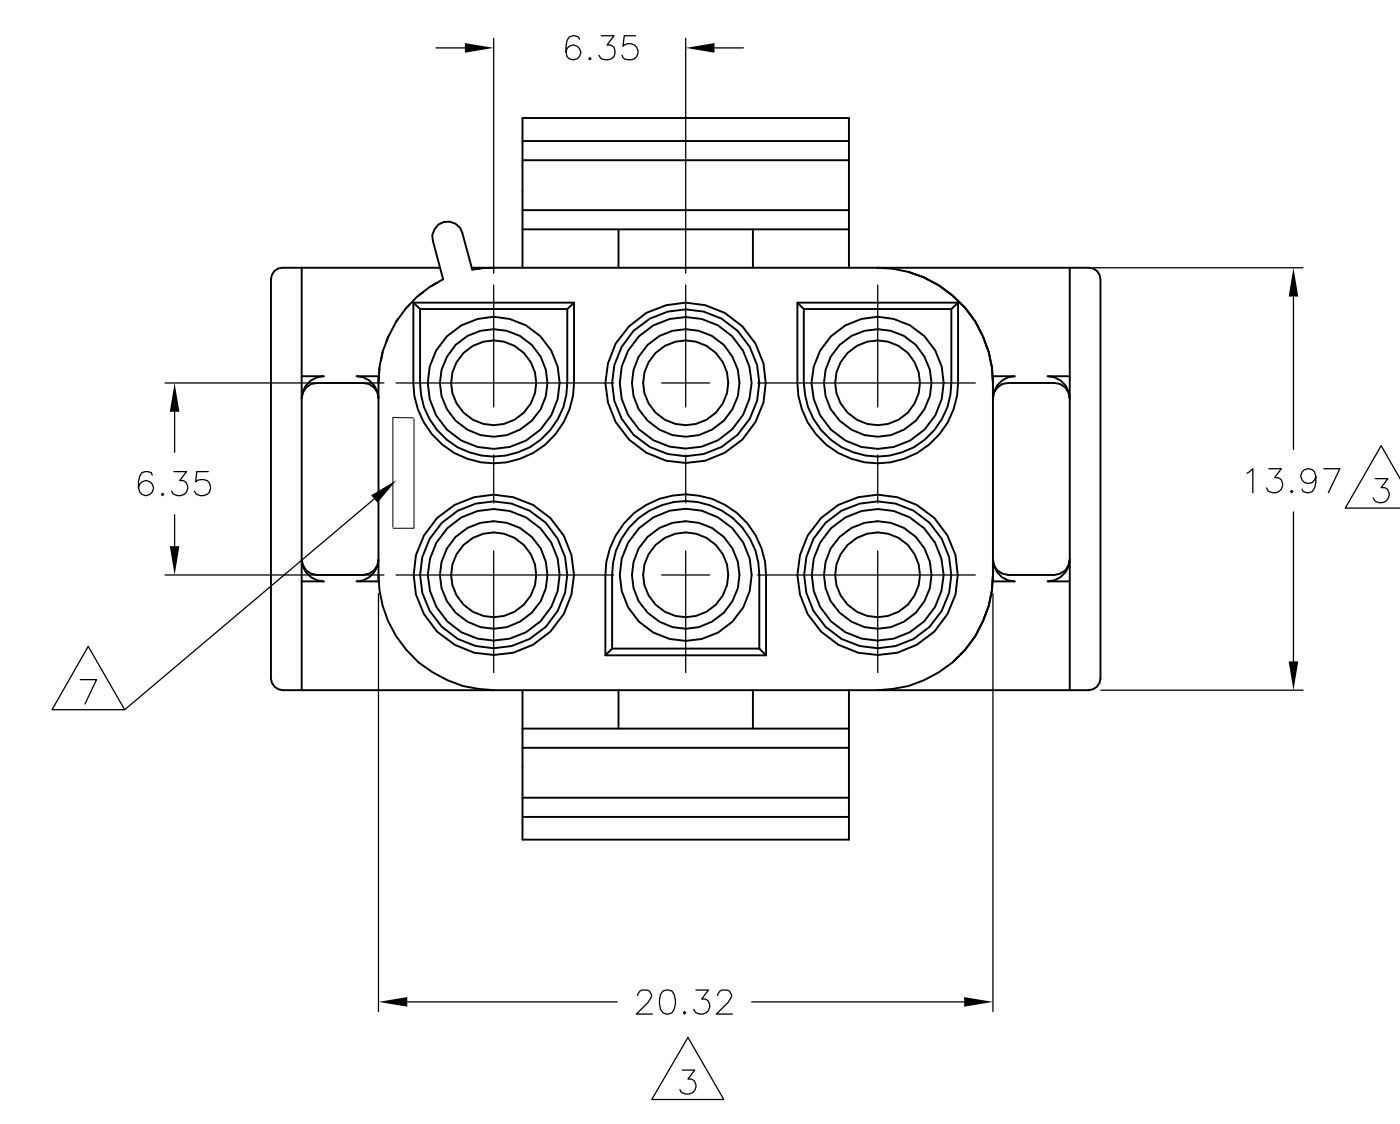
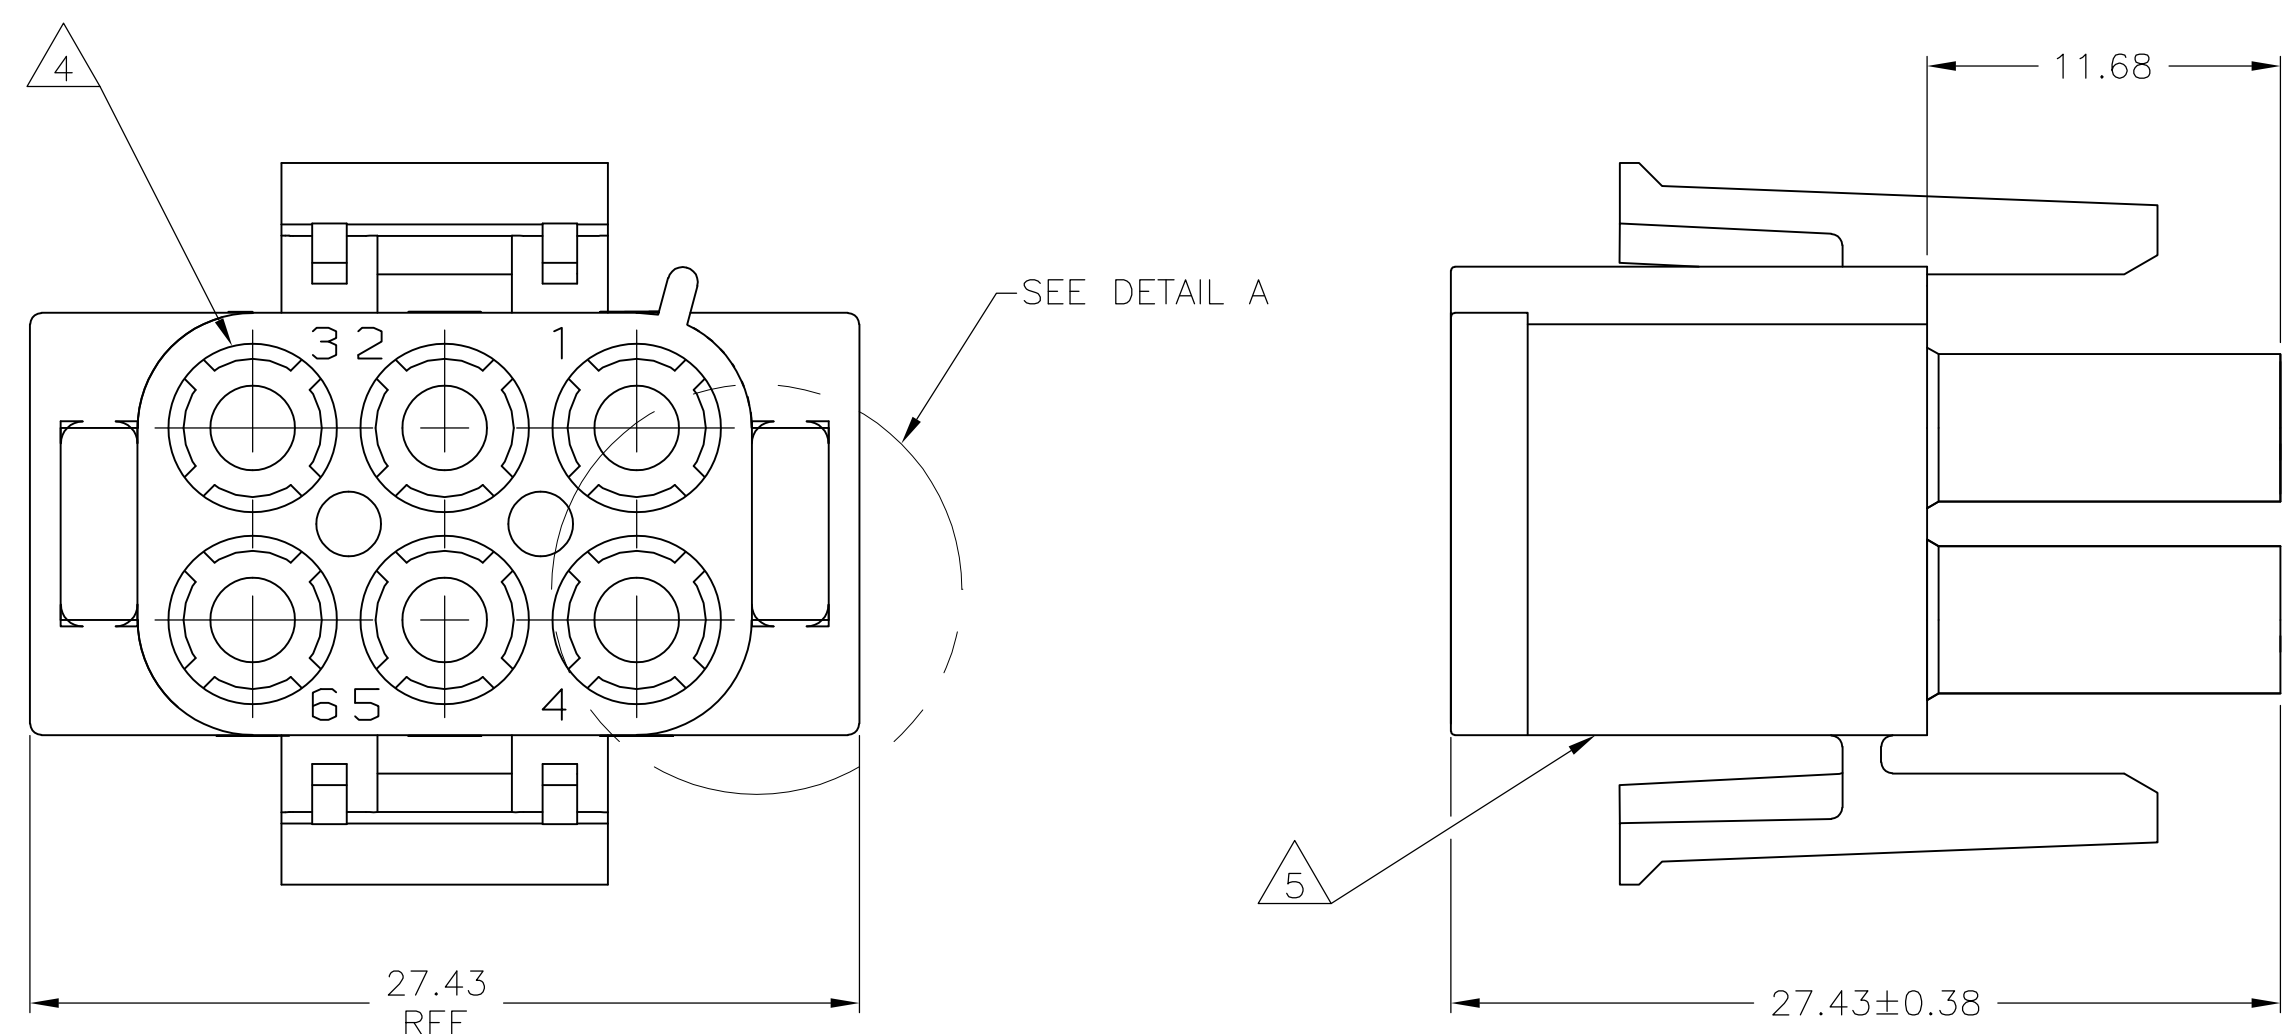


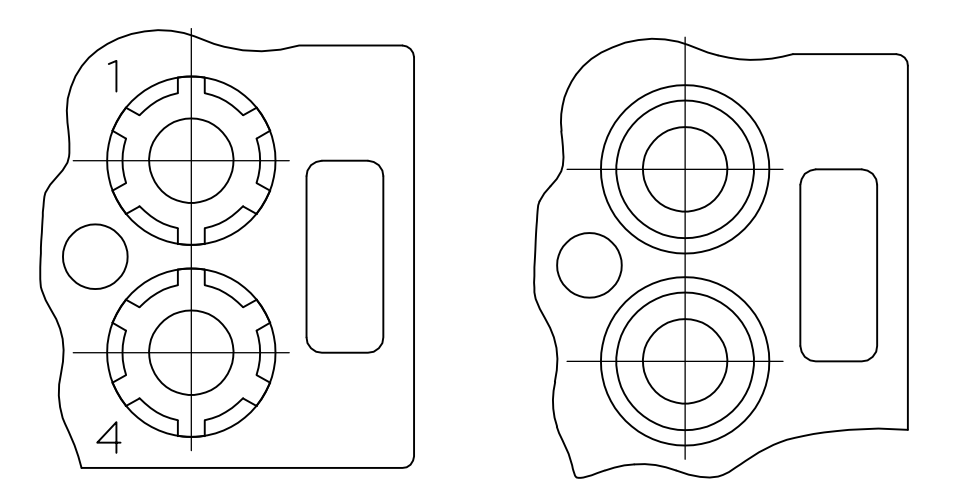

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
6. MANUFACTURING LOCATION ID ON SIDE OF HOUSING (OPTIONAL).
7. TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

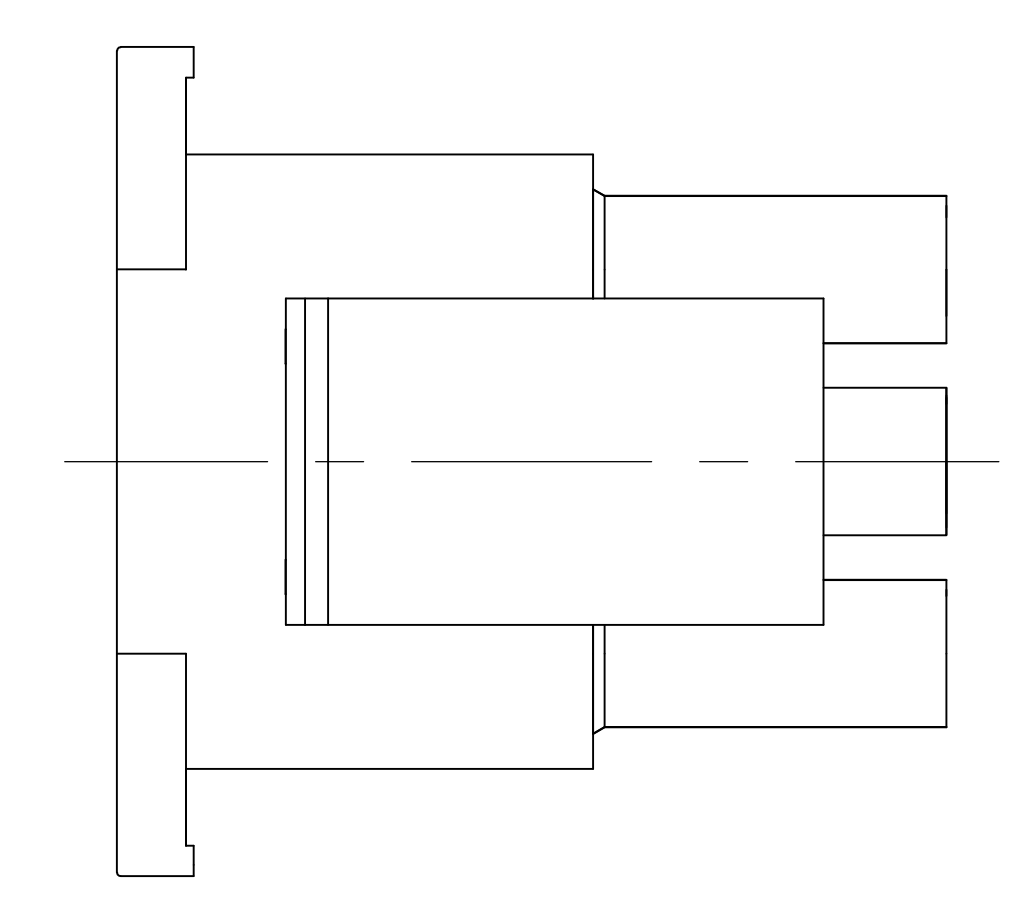


DETAIL A
OPTIONAL CONSTRUCTIONS

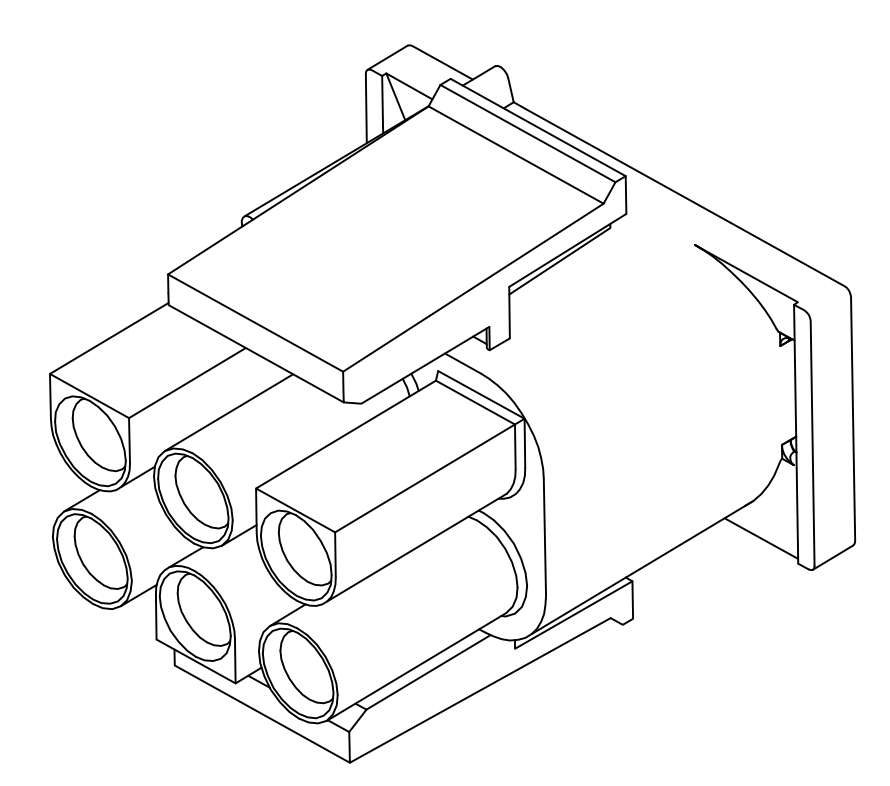

27.43	1.080
20.32	.800
13.97	.550
11.68	.460
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	






8	SUPERSEDED BY 1-480704-0	8	OBSOLETE	BLACK	1-480704-9
		8	OBSOLETE	GRAY	1-480704-8
		8	OBSOLETE	BLUE	1-480704-6
		8	OBSOLETE	GREEN	1-480704-5
		8	OBSOLETE	YELLOW	1-480704-4
		8	OBSOLETE	ORANGE	1-480704-3
				RED	1-480704-2
				BROWN	1-480704-1
				NATURAL	1-480704-0
				COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN K. WHITAKER	23MAR05	 TE Connectivity	
			CHK S. RIDGILL	23MAR05		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL	NAME	PLUG, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)
mm				PRODUCT SPEC		




LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
—	—	SEE SHEET 1		—	—	—	—

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

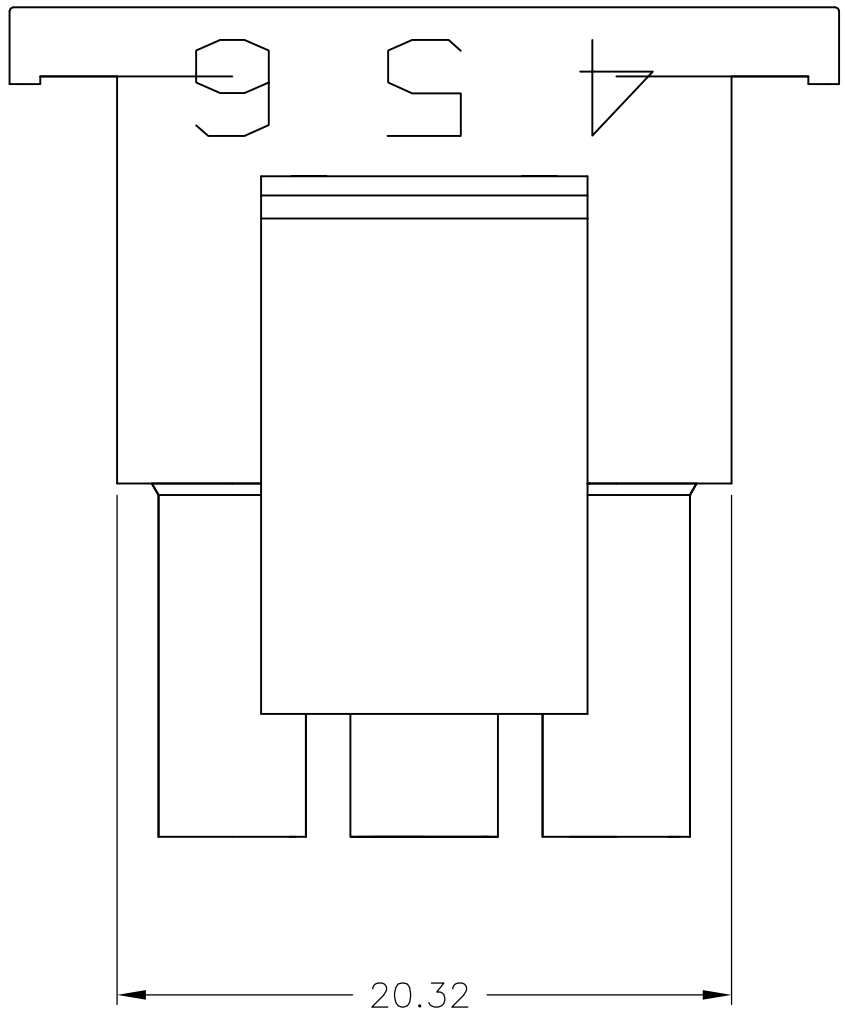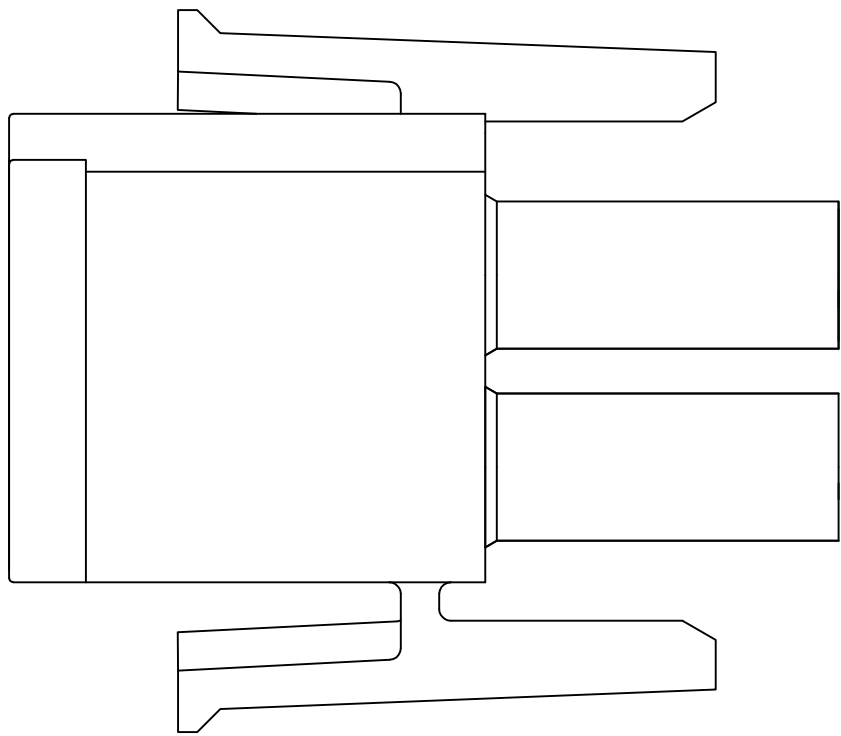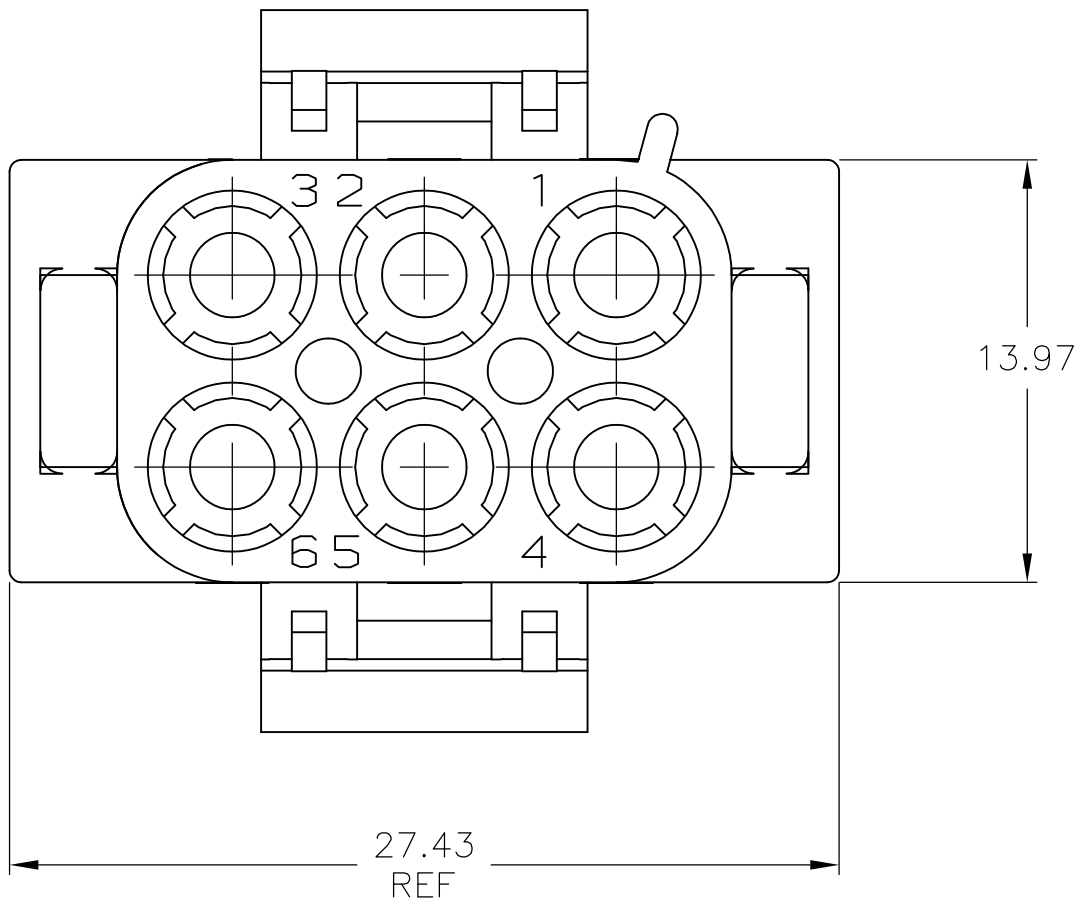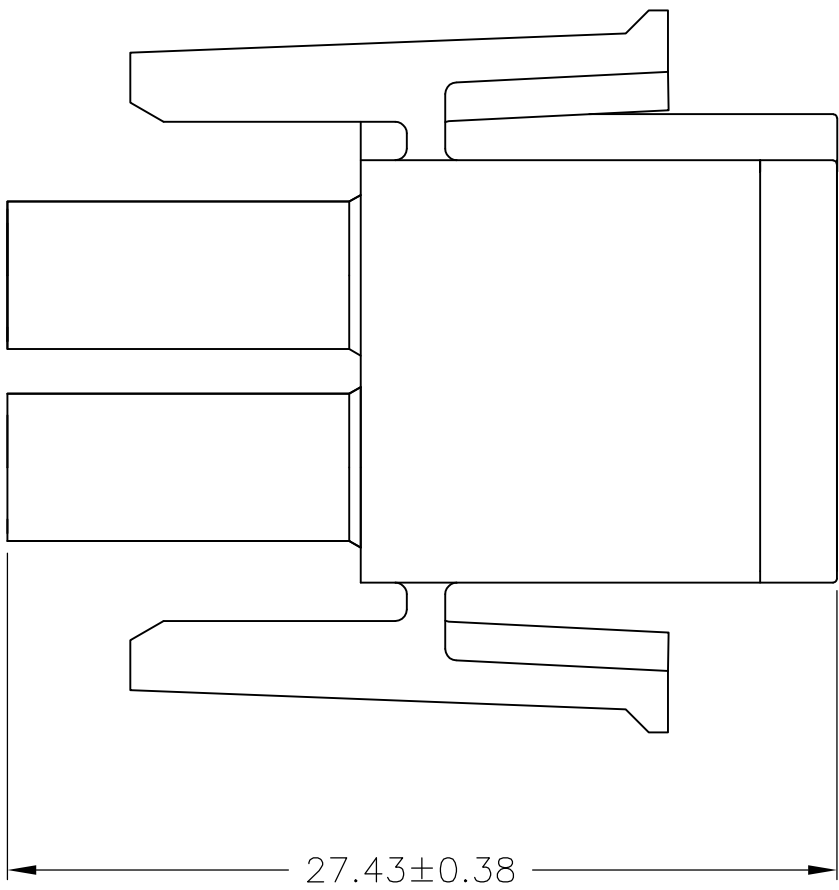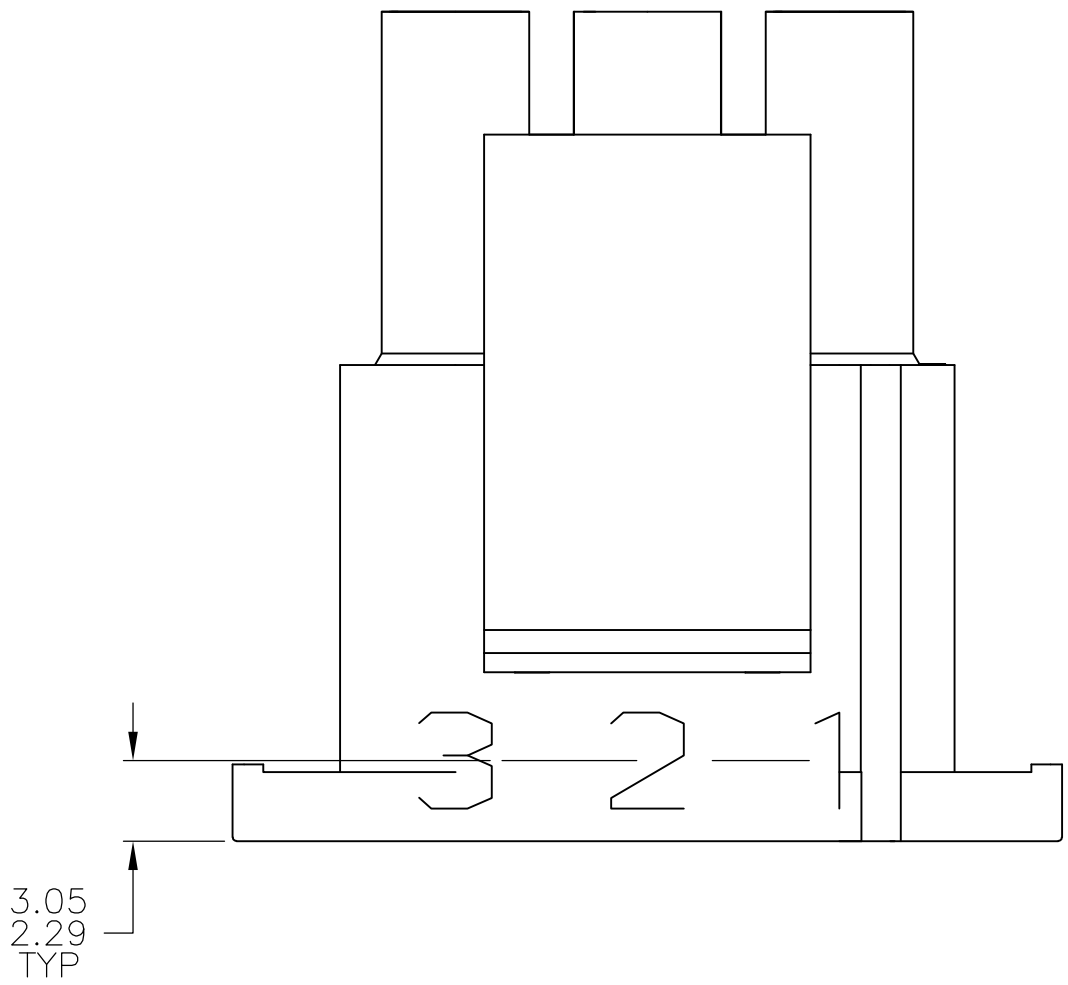

3.05	.120	27.43	1.080
2.29	.090	20.32	.800
0.38	.015	13.97	.550
0.13	.005	3.18	.125
MM	IN	MM	IN
CONVERSION TABLE			



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
K. WHITAKER

CHK
S. RIDGILL

APVD
S. RIDGILL

23MAR05

23MAR05

23MAR05

DIMENSIONS:

mm

0. PLC ± —

1. PLC ± —

2. PLC ± 0.13

3. PLC ± —

4. PLC ± —

ANGLES ± 0°30'

FINISH —

MATERIAL —

—

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT —

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV AP3

NATURAL

COLOR

2-480704-0

PART NUMBER

TE Connectivity

PLUG,
6 CIRCUIT,
UNIVERSAL MATE-N-LOK(TM)

A100779C-480704