
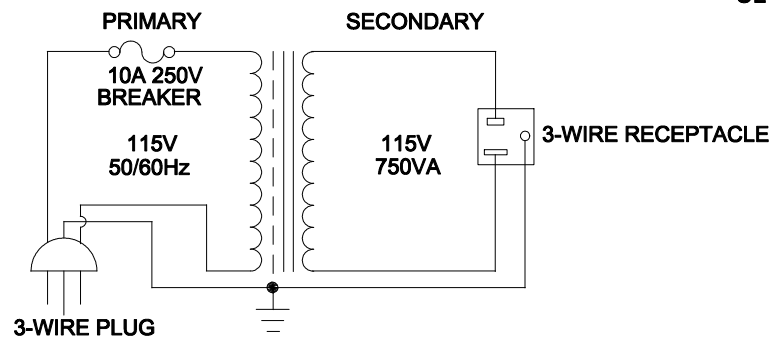
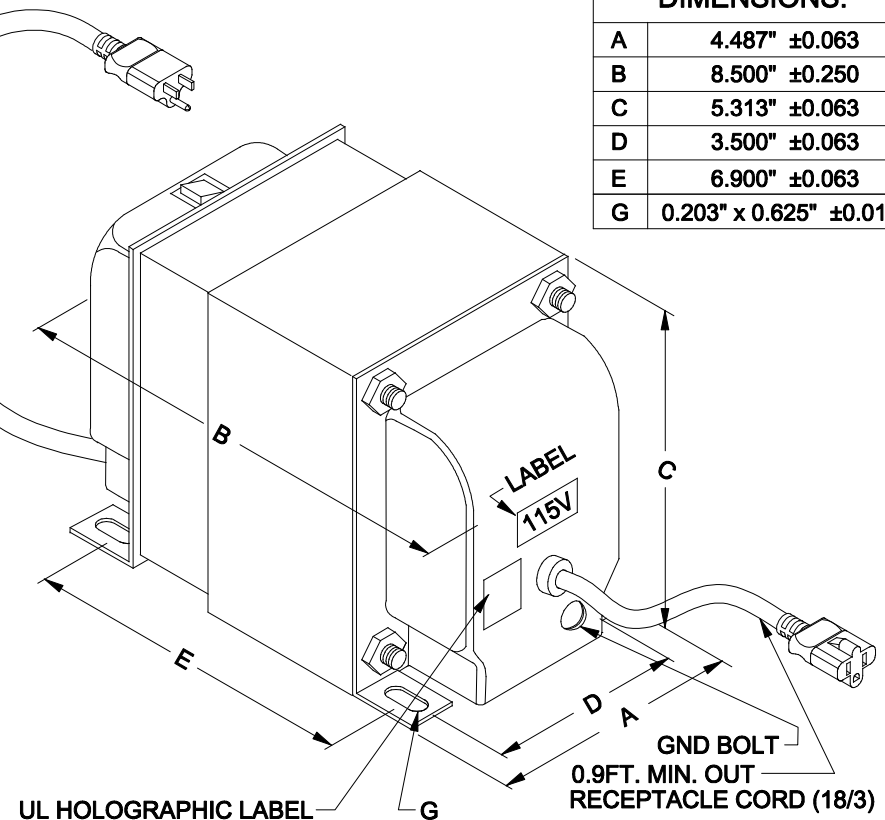


HAMMOND MANUFACTURING. LINE ISOLATION TX.
171F
 INPUT 115V 50/60Hz 750VA
 SHIELDED
 OUTPUT 115V 6.5A
 MADE IN CANADA
 U.L./us LISTED (POWER SUPPLY) 89PN
 DATE

DIMENSIONS:	
A	4.487" ±0.063
B	8.500" ±0.250
C	5.313" ±0.063
D	3.500" ±0.063
E	6.900" ±0.063
G	0.203" x 0.625" ±0.015

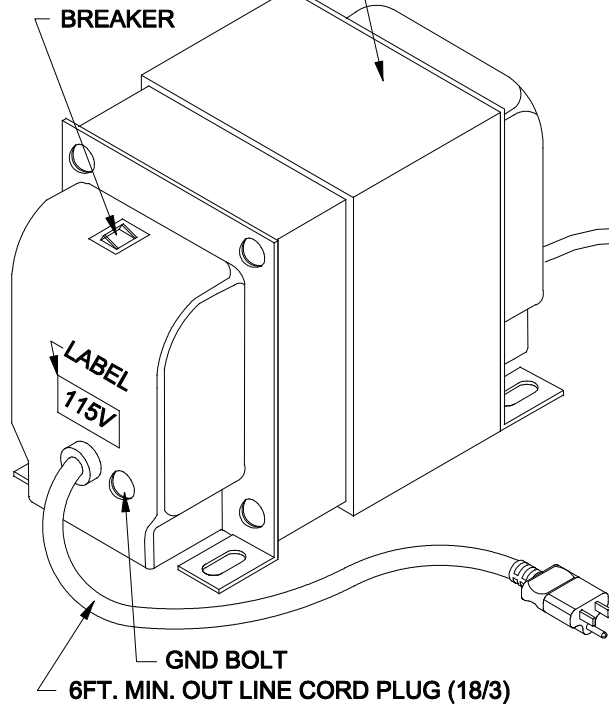

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, TO CORD PLUG	1A	Max.
Sec. N.L.V	@ 115V, 60Hz, TO CORD PLUG		
	RECEPTACLE PLUG =	118.0V	±2%
DCR	@ 20°C, TO CORD PLUG =	0.147 Ω	±20%
	@ 20°C, RECEPTACLE PLUG =	0.172 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	C.I. 06/18/21	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE:	DWG. NO.
			DATE: 06/18/21	APP'D. BY:	LINE ISOLATION TX. PLUG & RECEPTACLE	171F
				DIMENSIONS: IN(X) MM()		

HAMMOND MANUFACTURING™