

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 734661

PART NO. ENG. NO.

02-06-1131	1855-(P901)	
02-06-1132	1855-(P901)L	
02-06-5137	1855-(P591)	OBSOLETE
02-06-5136	1855-(P591)L	OBSOLETE
02-06-5138	1855-(P561)	
02-06-5139	1855-(P561)L	
02-06-5130	1855-(P550)	
02-06-5135	1855-(P550)L	
02-06-5147	1855-(P228)	
02-06-5148	1855-(P228)L	
02-06-1141	1855-1(P901)	
NOT TOOLED	1855-1(P901)L	
02-06-1143	1855-(P901)1	

LEGEND

1855-*(****)*

BLANK=WITH LOCKING TABS
1=WITHOUT LOCKING TABS

P=PREPLATE
BLANK=POSTPLATE

FORM
BLANK=CHAIN
1=CHAIN WITH INTERLEAF
PAPER ON REEL.
L=LOOSE
FINISH CODE

NOTES:

- MATERIAL: BRASS
- FINISHES:

901 HOT TIN DIP (.00051)/.000020 MIN.

* 228 SELECT GOLD PLATE (.00075)/.000030 MIN. IN CONTACT AREA, SELECT TIN (.00250)/.000100 MIN. IN CRIMP AREA OVER (.00125)/.000050 MIN. NICKEL OVERALL, WITH .000010/(.000025) MAX. SELECT GOLD FLASH IN AREA INDICATED.



561 SELECT GOLD PLATE (.00076)/.000030 MIN. IN CONTACT AREA, (.00127)/.000050 MIN. NICKEL OVERALL.

591 SELECT GOLD PLATE (.00127)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.


550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030 MIN. NICKLE OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

* THE PRIMARY SHIPPING CARTON WILL BE LABELED, *COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.


- PRODUCT SPECIFICATION: PS-02-0-6
- PACKAGE INFORMATION: NOT AVAILABLE
- TERMINAL FOR USE WITH (1.57)/.062 DIA. SERIES HOUSINGS AND WILL ACCEPT 24 THRU 30 AWG WIRE WITH (1.02/2.29)/.040/.090 INSULATION DIAMETER.

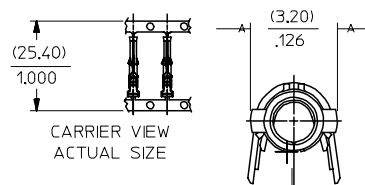

SCALE:10X



SCALE:10X

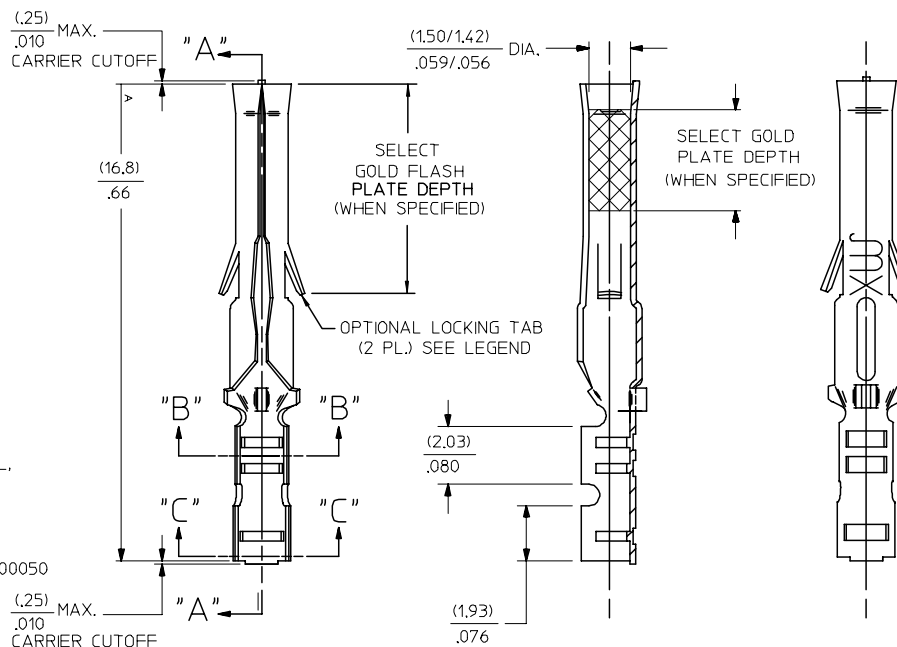

SECT. "A-A"

AP	REVISE Sn/Pb PLATE REDRAWN TO ME10 5/07/04 RHOLTS
AN	OBSOLETE P/N UCR2002-0270 COMERC 01/9/28
AM1	OBSOLETE -JP575J & -JP575L ECR UG 0558 G3/15/95 RW
AM	REV. AND REDRAWN PER ECR 10372 GEP 6-17-87 RW

REV. MATL. SPEC/USTAT TO ME10		EC NO.: IUCP2004L-20097		DRW:RHOLTS 2004/05/14		CHKD: 2004/05/14		APPR:FSMITH 2004/05/18		REV							
QUALITY SYMBOLS		DESCRIPTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 8:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION		REVISE ON CAD ONLY					
						DIMENSION STYLE IN/MM		TITLE									
 = 0				4 PLACES ±.0005 ±.0005		DRAWN BY		DATE		CRIMP TERMINAL, FEMALE (1.57)/.062 DIA., BRASS FOR 24 THRU 30 GA. WIRE  MOLEX INCORPORATED							
				3 PLACES ±.0005 ±.1		GEP		1987/09/17									
				2 PLACES ±0.25 ±.014		CHECKED BY		DATE									
				1 PLACE ±0.35 ±.014		RW		1987/09/17									
				ANGULAR ±1/2°		APPROVED BY		DATE					MATERIAL NO.		DOCUMENT NO.		SHEET NO.
 = 0				DRAFT WHERE APPLICABLE		RAS		1987/09/17		SEE CHART		SD-1855-*		1 OF 1			
AP				MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										C	