

Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 734768



PART NO.	ENG. NO.	
02-09-1103	1189-(P901)L	OBSOLETE
02-09-1101	1189-(P901)	OBSOLETE
02-09-5111	1189-(P591)L	
02-09-5102	1189-(P591)	
02-09-5106	1189-(P550)L	
02-09-5100	1189-(P550)	
NOT TOOLED	1189-(P558)L	
NOT TOOLED	1189-(P558)	





SECT. "A-A"



SECT. "B-B"

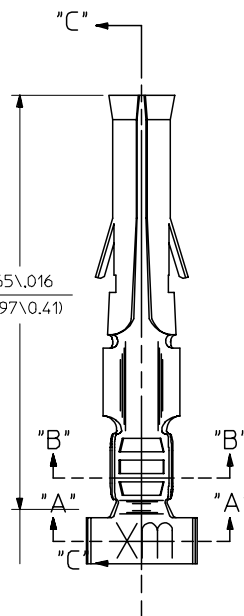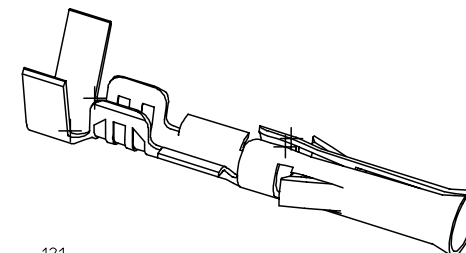


SECT. "C-C"

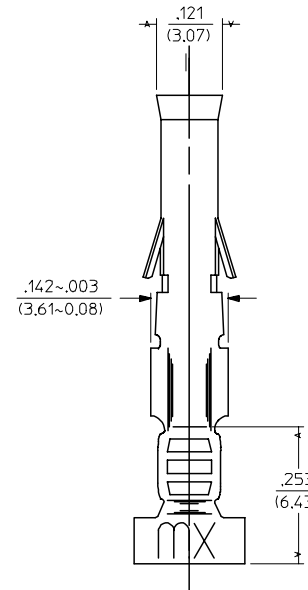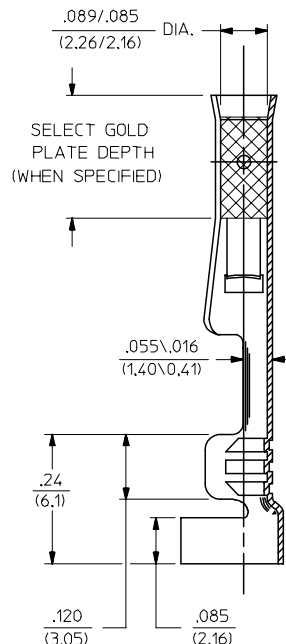

MATERIAL:

CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK, SPRING TEMPER.



NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 20 AWG WIRE.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. RETENTION: 20 LBS. MIN. FROM HOUSING.
4. THIS PART CONFORMS TO PROD. SPEC. 02-09.

Δ DIMENSION FROM THE END OF TERMINAL TO THE END OF THE BRUSH ON THE WIRE CRIMPED INTO THE TERMINAL.

FINISH CODES:

- 901 HOT TIN DIP .000020/(0.00051) MIN.
- 565 SELECT GOLD PLATE .000020/(0.00051) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 558 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX OF DIRECTIVE 2000/53/EC". AND CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.

LEGEND

1189-(****)*

P=PREPLATE
BLANK=POSTPLATE

FORM
BLANK=CHAIN
L=LOOSE

FINISH CODE

TRANSLATED TO ME10 EC NO: UCP2004-2611 DRAWN: JERNY 2004/07/15 CHKD: AELHAG 2005/01/17 APPR: FSMTH 2005/01/18		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 6:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE CRIMP TERMINAL, FEMALE, DIMPLED .093/(2.36) DIA. 14-20 AWG MOLEX INCORPORATED
				mm	INCH	DRAWN BY GWC	DATE 1995/02/10				
				4 PLACES ± ---	± ---	CHECKED BY	DATE				
				3 PLACES ± ---	± .010	RW	1995/02/10				
				2 PLACES ± 0.25	± .014	APPROVED BY	DATE				
		1 PLACE ± 0.35	± ---	RAS	1995/02/10						
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-1189-**		1 OF 1			
D		REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION