


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 736659

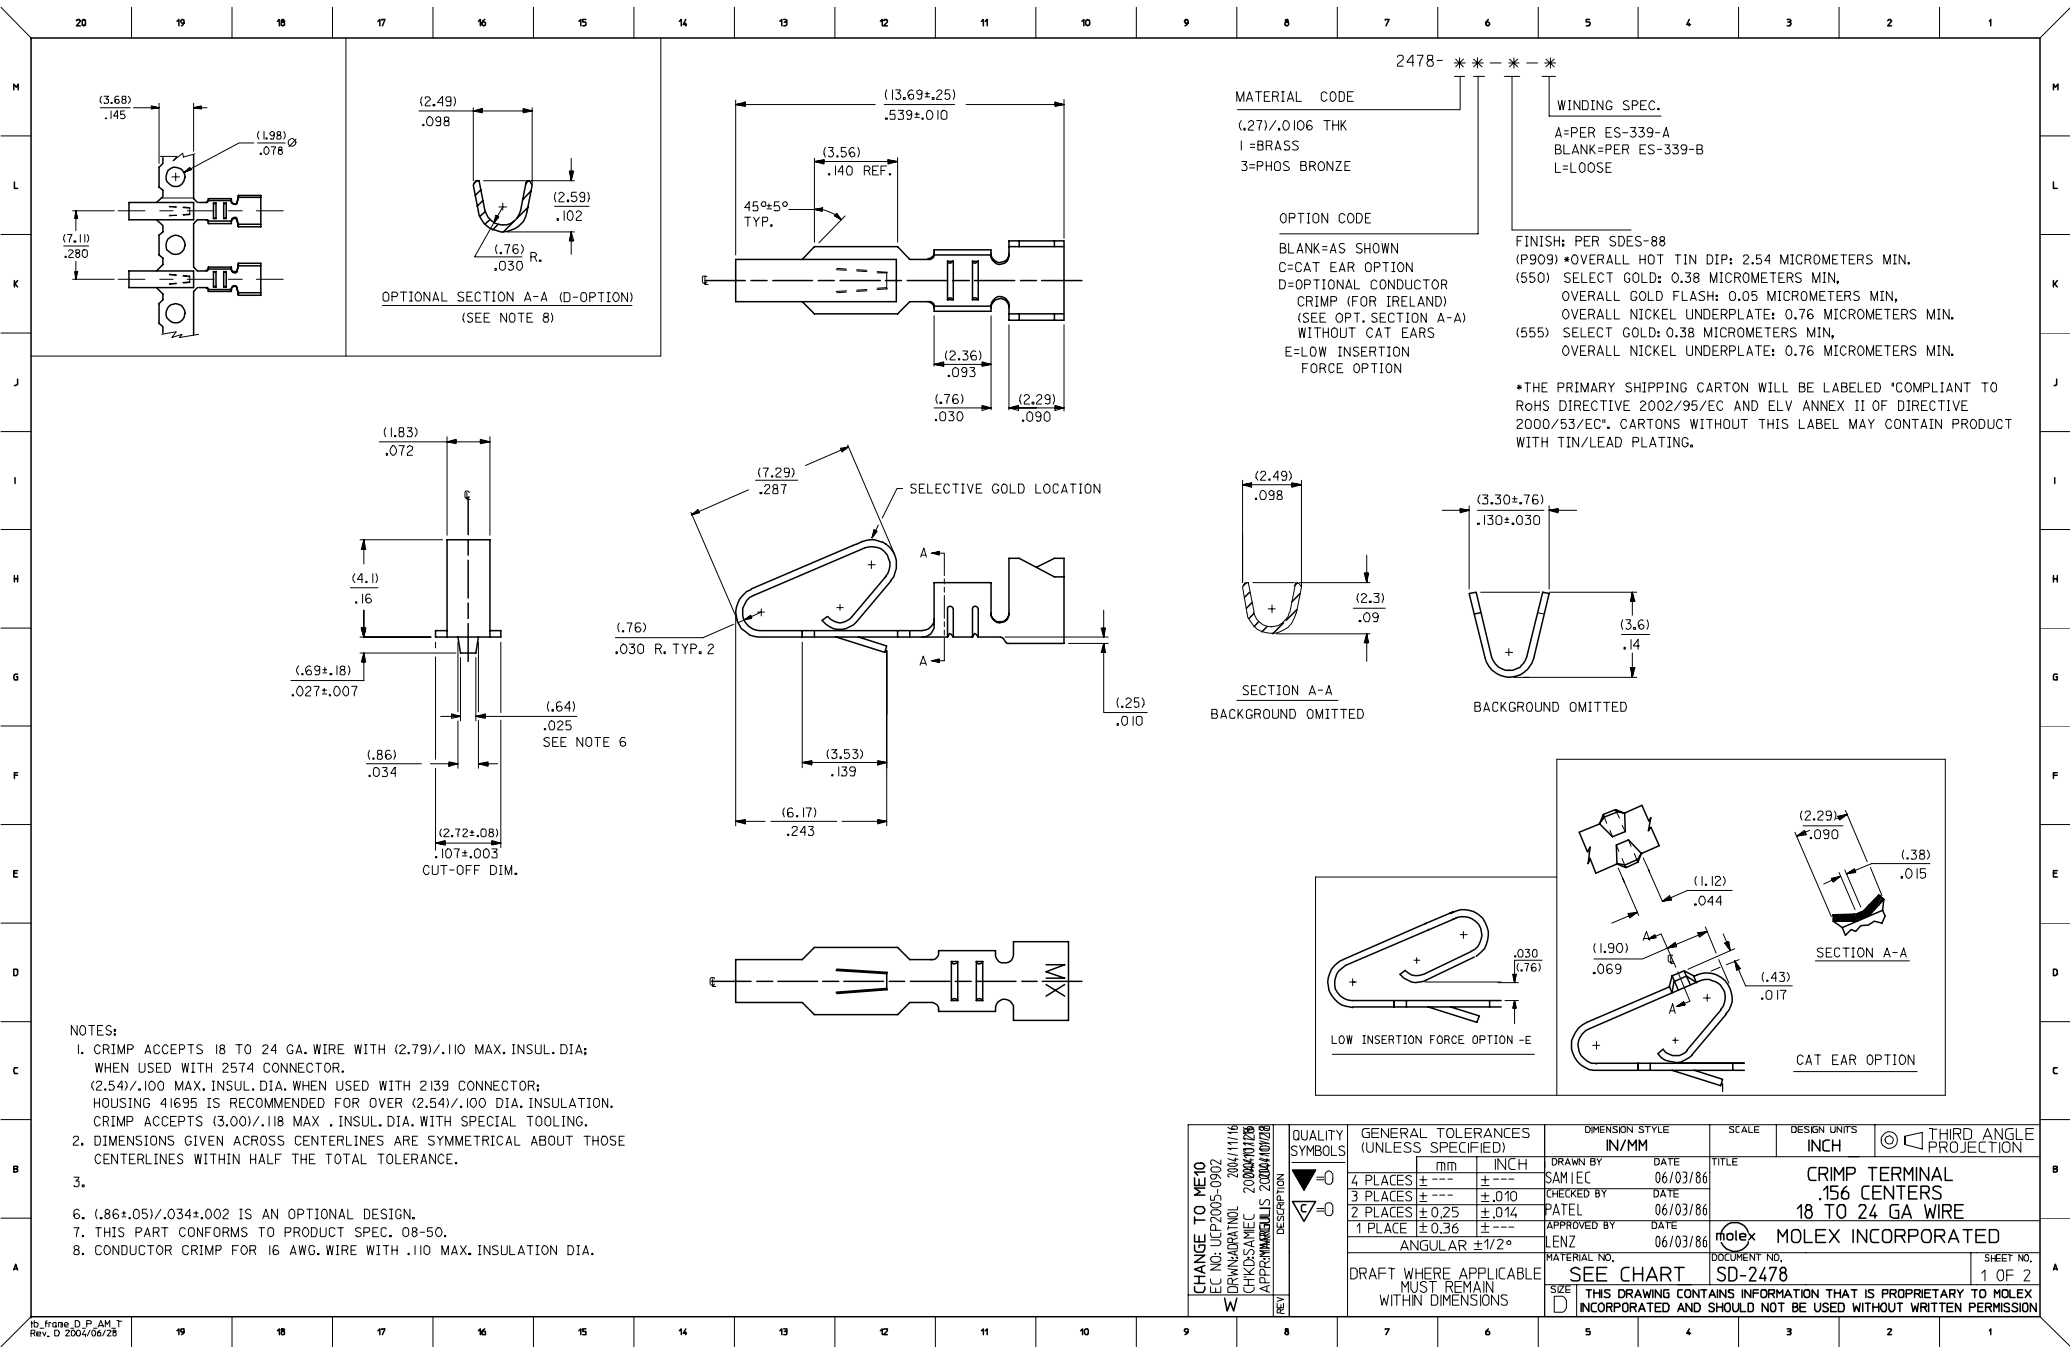

- NOTES:
1. CRIMP ACCEPTS 18 TO 24 GA. WIRE WITH (2.79)/.110 MAX. INSUL. DIA; WHEN USED WITH 2574 CONNECTOR; (2.54)/.100 MAX. INSUL. DIA. WHEN USED WITH 2139 CONNECTOR; HOUSING 41695 IS RECOMMENDED FOR OVER (2.54)/.100 DIA. INSULATION. CRIMP ACCEPTS (3.00)/.118 MAX. INSUL. DIA. WITH SPECIAL TOOLING.
 2. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 - 3.
 6. (.86+.05)/.034+.002 IS AN OPTIONAL DESIGN.
 7. THIS PART CONFORMS TO PRODUCT SPEC. 08-50.
 8. CONDUCTOR CRIMP FOR 16 AWG. WIRE WITH .110 MAX. INSULATION DIA.

CHANGE TO ME10 EC NO. UCP2005-0902 DRAWN/DATE: 2004/11/16 CHKD/SAMEC 2004/10/28 APPROVED/LENZ 2004/10/28 W	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±.005 ±.0005 3 PLACES ±.005 ±.0005 2 PLACES ±.005 ±.0005 1 PLACE ±.005 ±.0005 ANGULAR ±1/2°	DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION			
			DRAWN BY	DATE	TITLE					
			CHECKED BY	DATE	CRIMP TERMINAL .156 CENTERS 18 TO 24 GA WIRE					
			APPROVED BY	DATE	MOLEX INCORPORATED					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-2478		SHEET NO. 1 OF 2
			SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

[illegible]