

Distributed by:

JAMECO[®]
ELECTRONICS

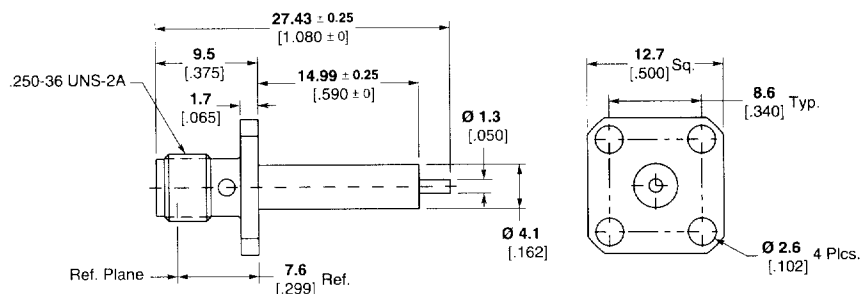

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

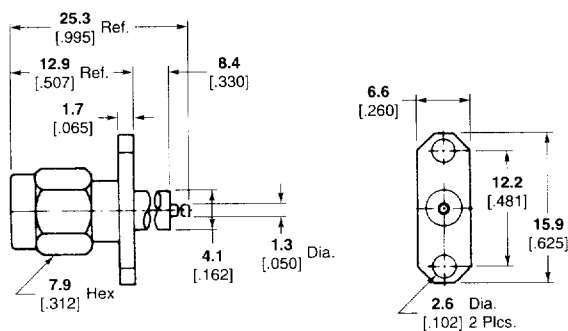

Jameco Part Number 739307



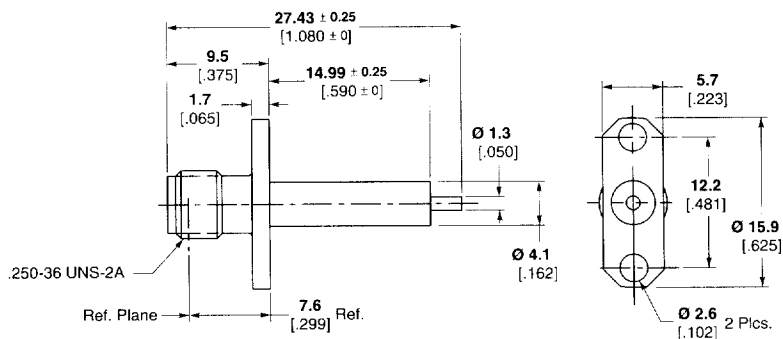

RF Coax Connectors

SMA Connectors (Continued)
Panel Mount, Straight Terminal4 Hole Flange Mount Jack
Receptacle

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	None	-(100-fGHz)	-65 to 165° C	2052-1200-02	1052518-1
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1201-02	1052523-1
Stainless, Gold	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1201-00	1052522-1

2 Hole Flange Mount Plug
Receptacle

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2051-1352-02	1052349-1

2 Hole Flange Mount Jack
Receptacle

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	None	-(100-fGHz)	-65 to 165° C	2052-1351-02	1052548-1
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1352-02	1052552-1