

Distributed by:

JAMECO[®]
ELECTRONICS



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.





Jameco Part Number 751269

LOC	DIST	REVISIONS				
		REV	PER	ECN	DESCRIPTION	DATE
CM	00	N	REV	PER	ECN	OG3B-0422-03


DATE	DWN	APVD
22AUG03	SC	JE

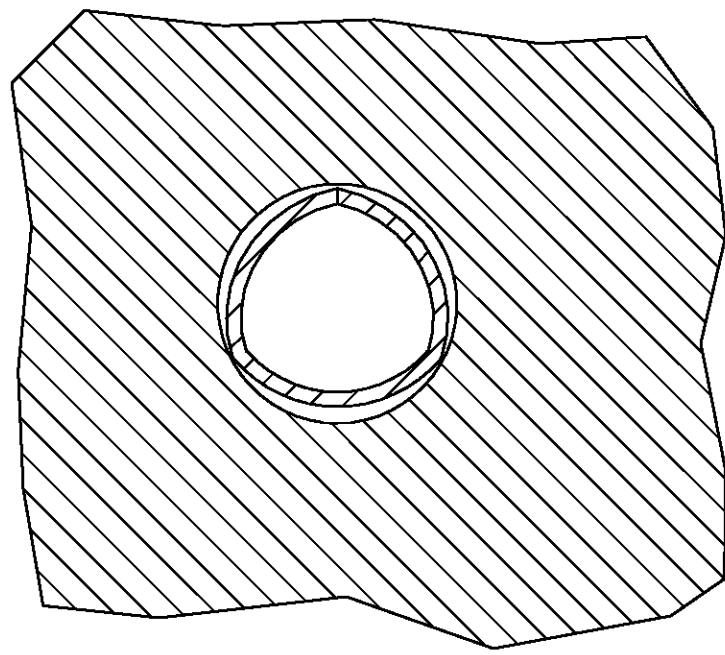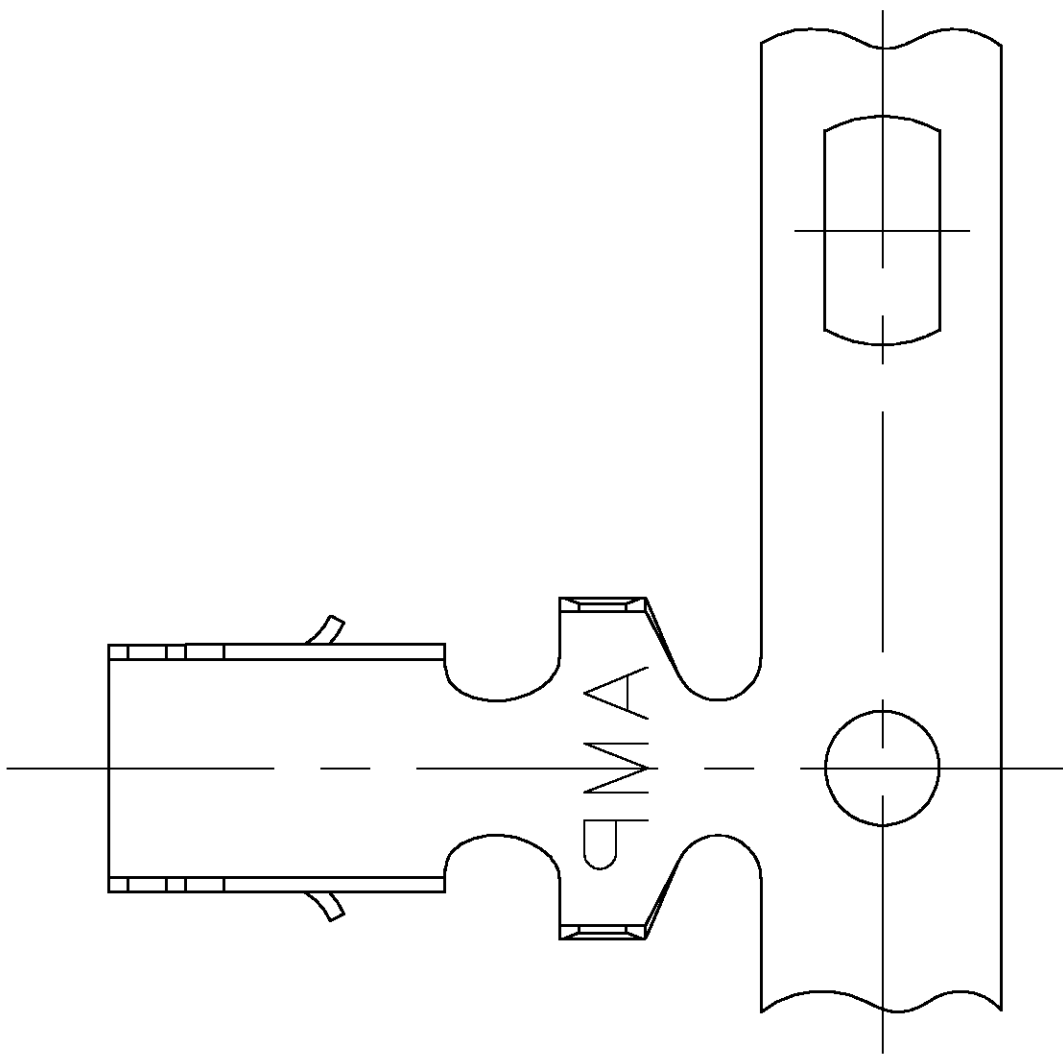


SECTION D-D

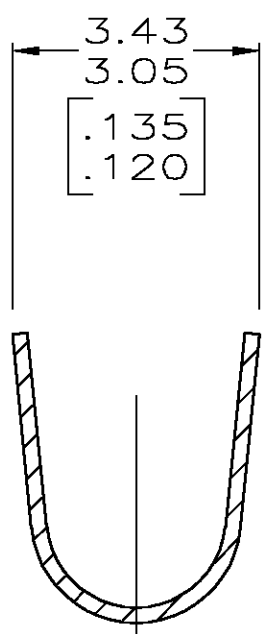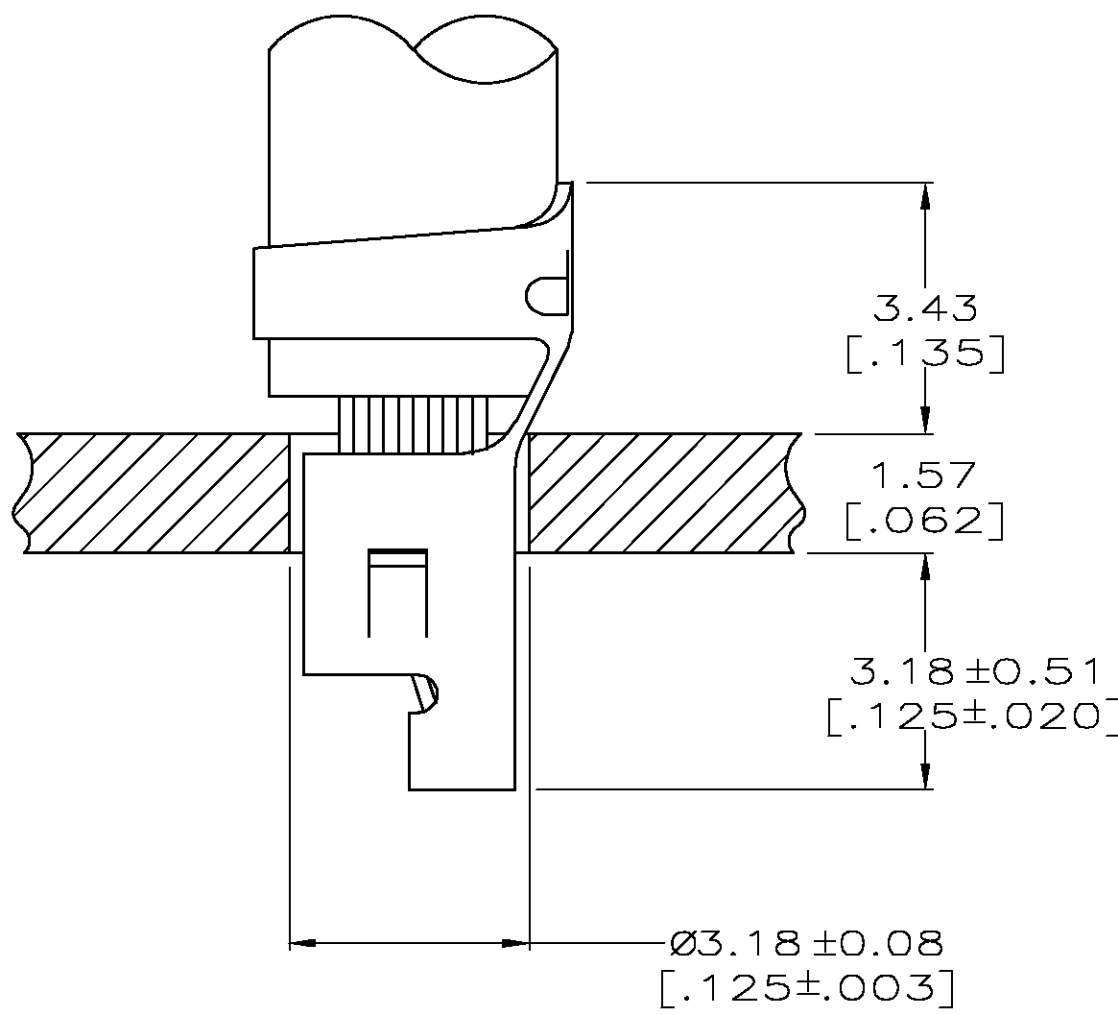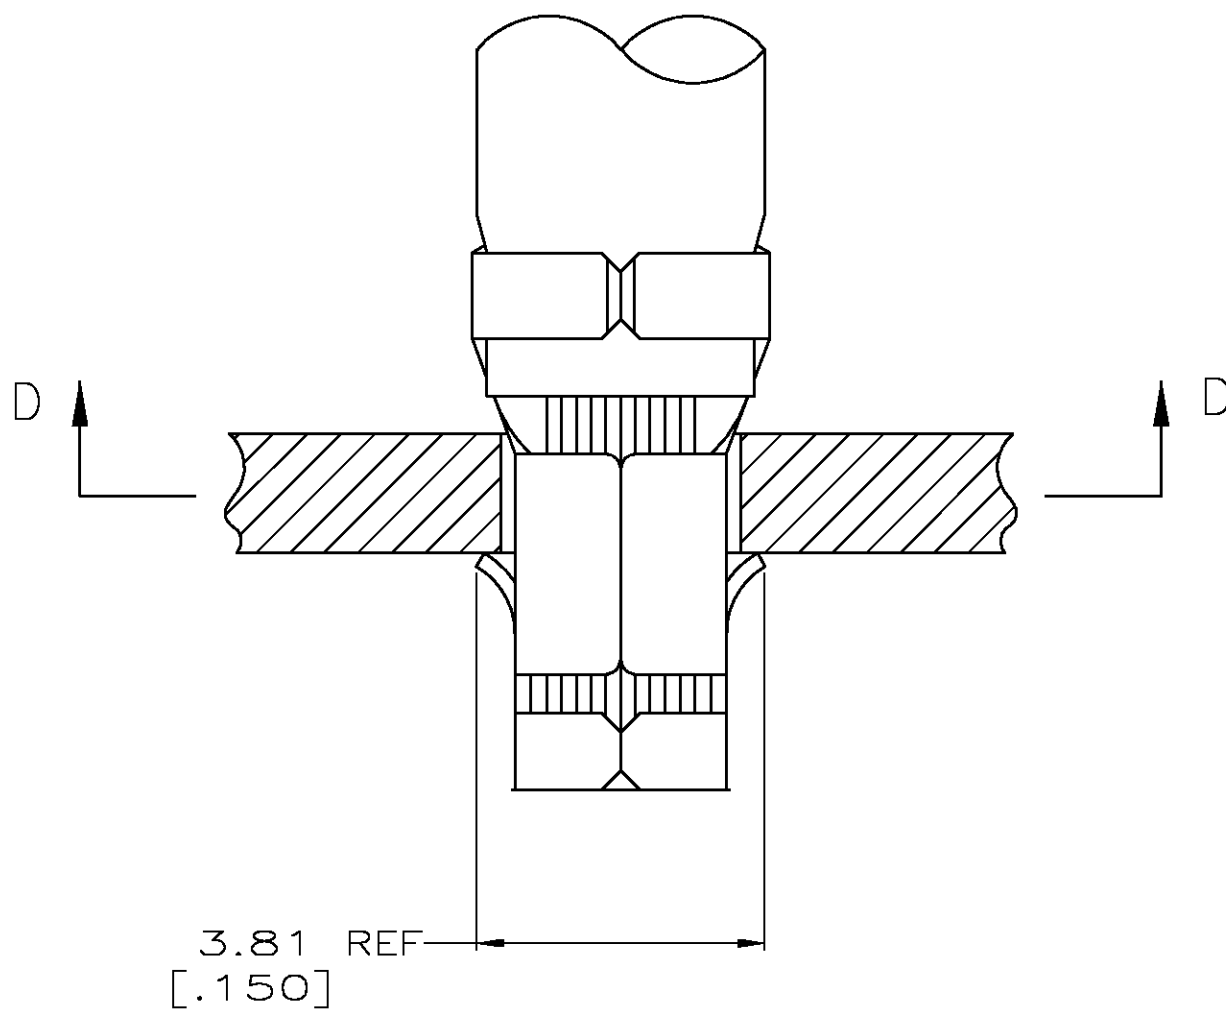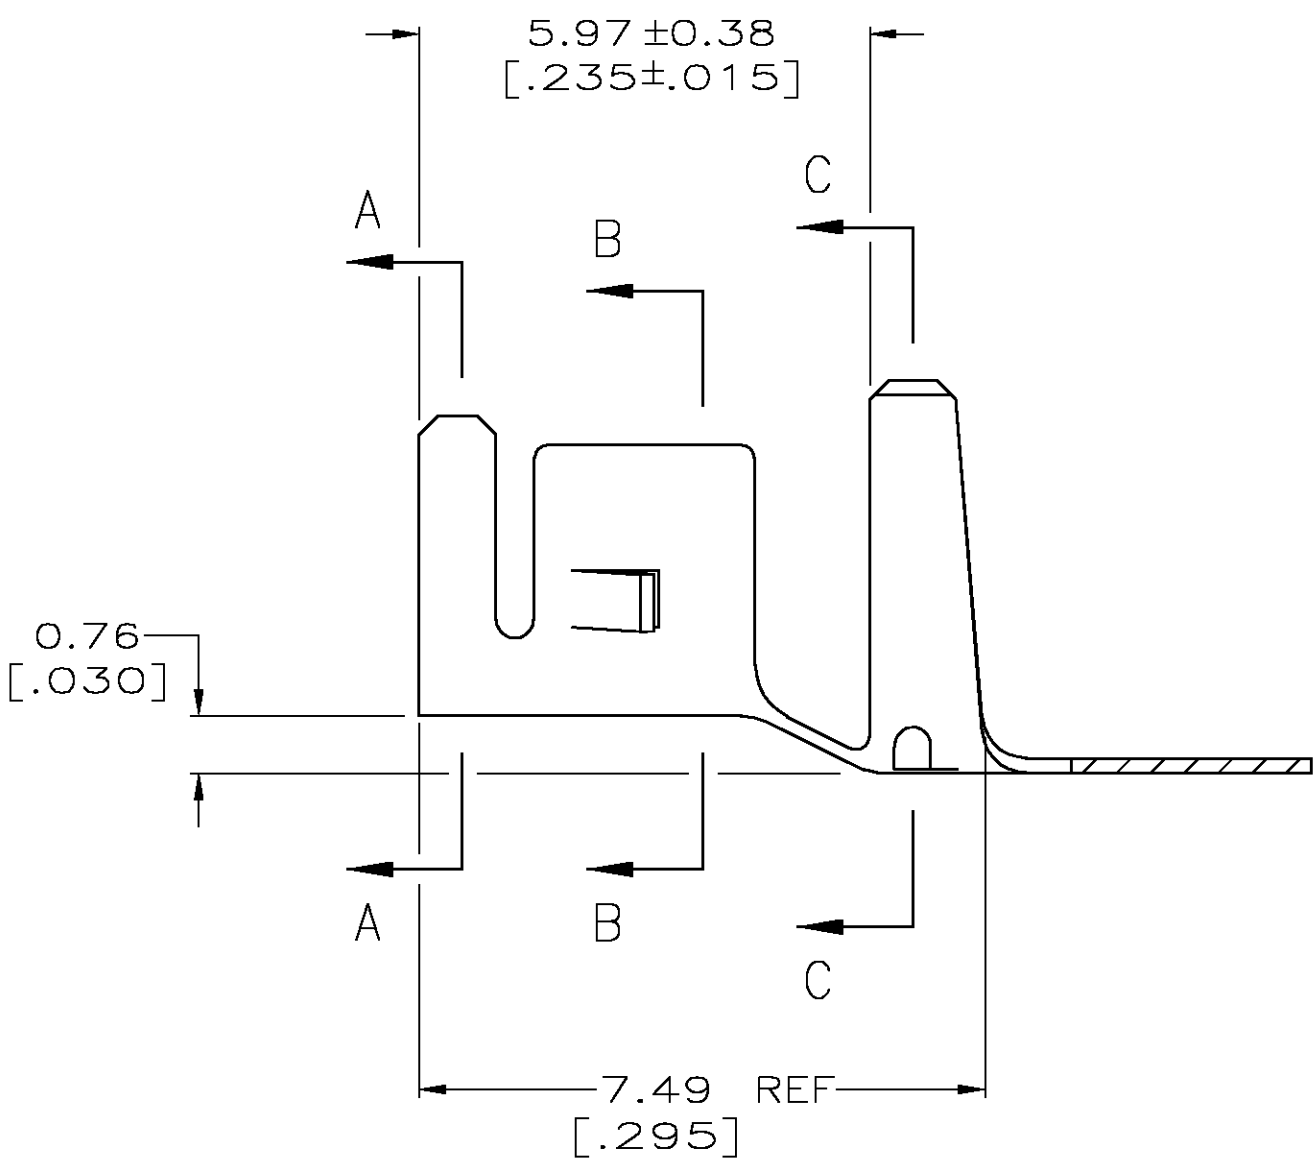

SECTION A-A

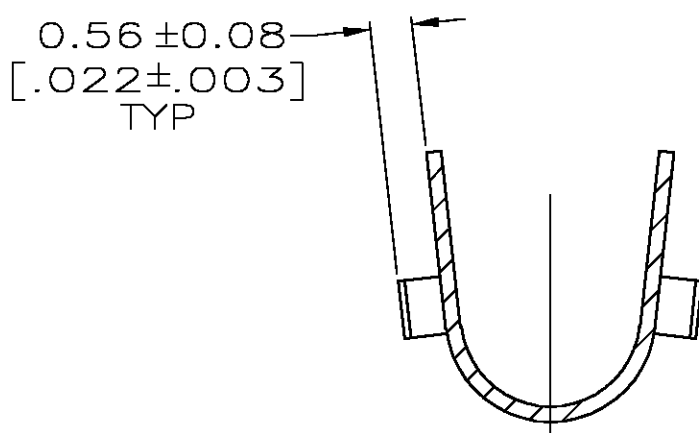

SECTION B-B

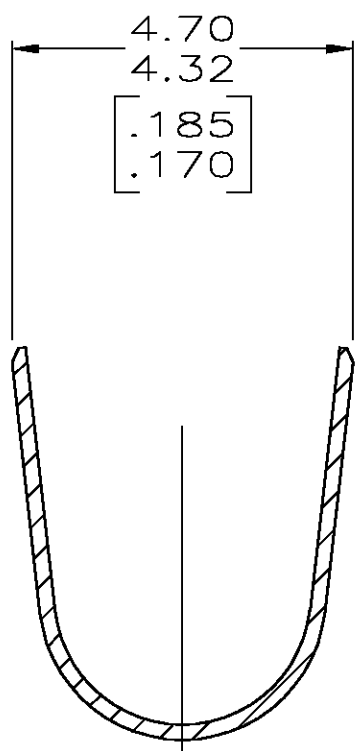

SECTION C-C

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
2. 0.00508 [.000200] MIN BRIGHT TIN-LEAD.
3. WIRE RANGE: 0.80 - 2.0 mm² [18 - 14 AWG].
4. INSULATION RANGE: 2.29 - 3.81 [.090 - .150] DIA.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. 0.00508 [.000200] MIN BRIGHT TIN.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER	22AUG2003	tyco Electronics		Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		D/K J. ELLIS	22AUG2003			NAME TERMINAL, AMP-IN™	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ELLIS		SIZE A1	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC		CAGE CODE 00779	
MATERIAL 0.198 [.0078] PH BRZ		APPLICATION SPEC		WEIGHT		DRAWING NO 770060	
CUSTOMER DRAWING		SCALE 10:1		SHEET 1 OF 1		REV N	