




Distributed by:




www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 752051

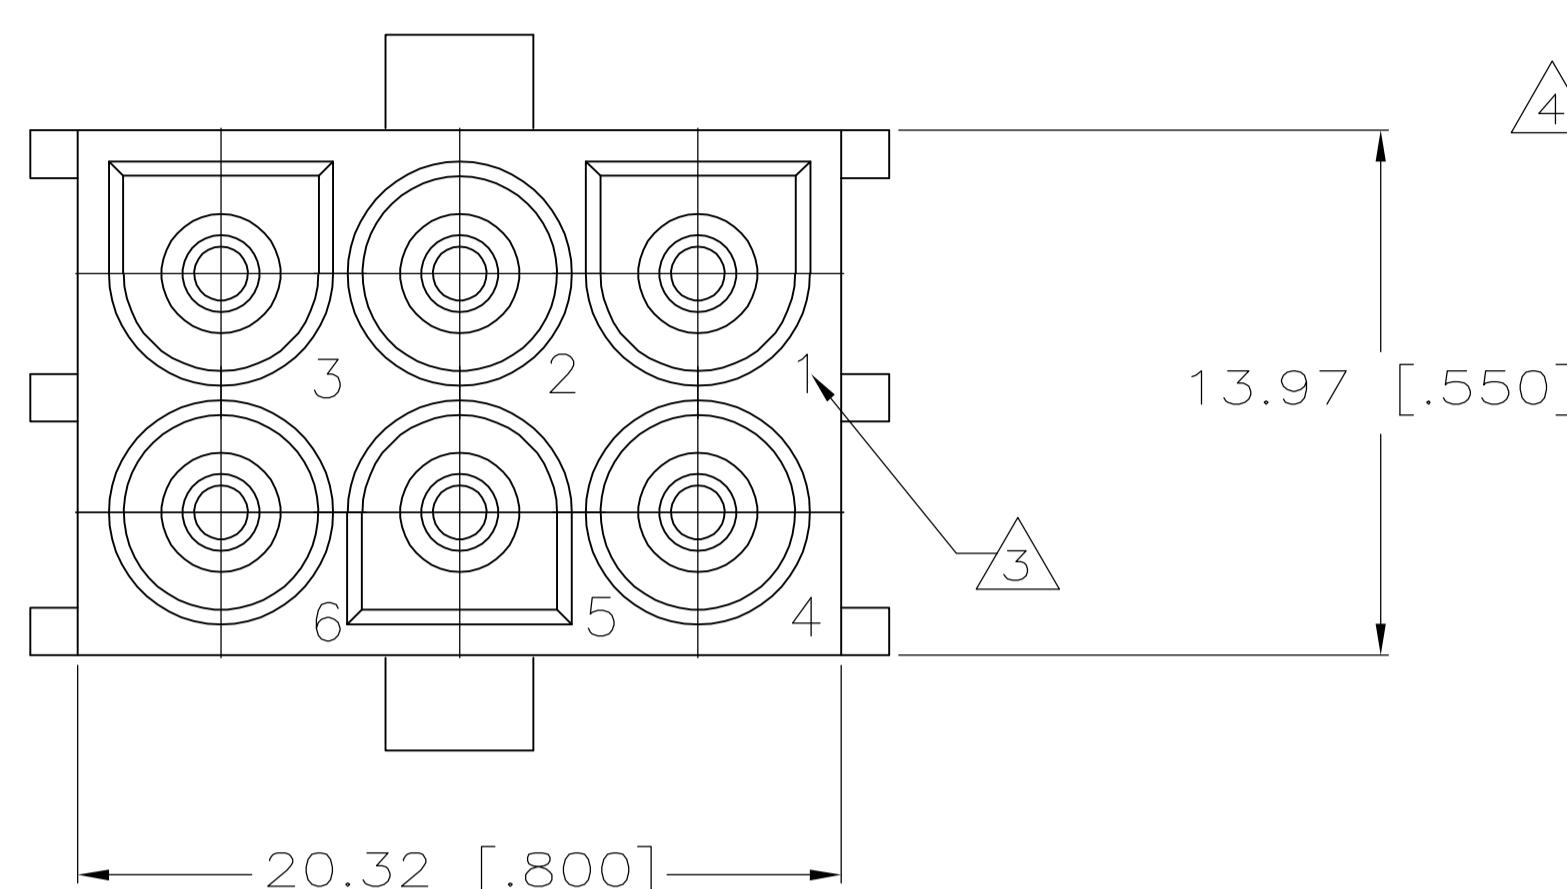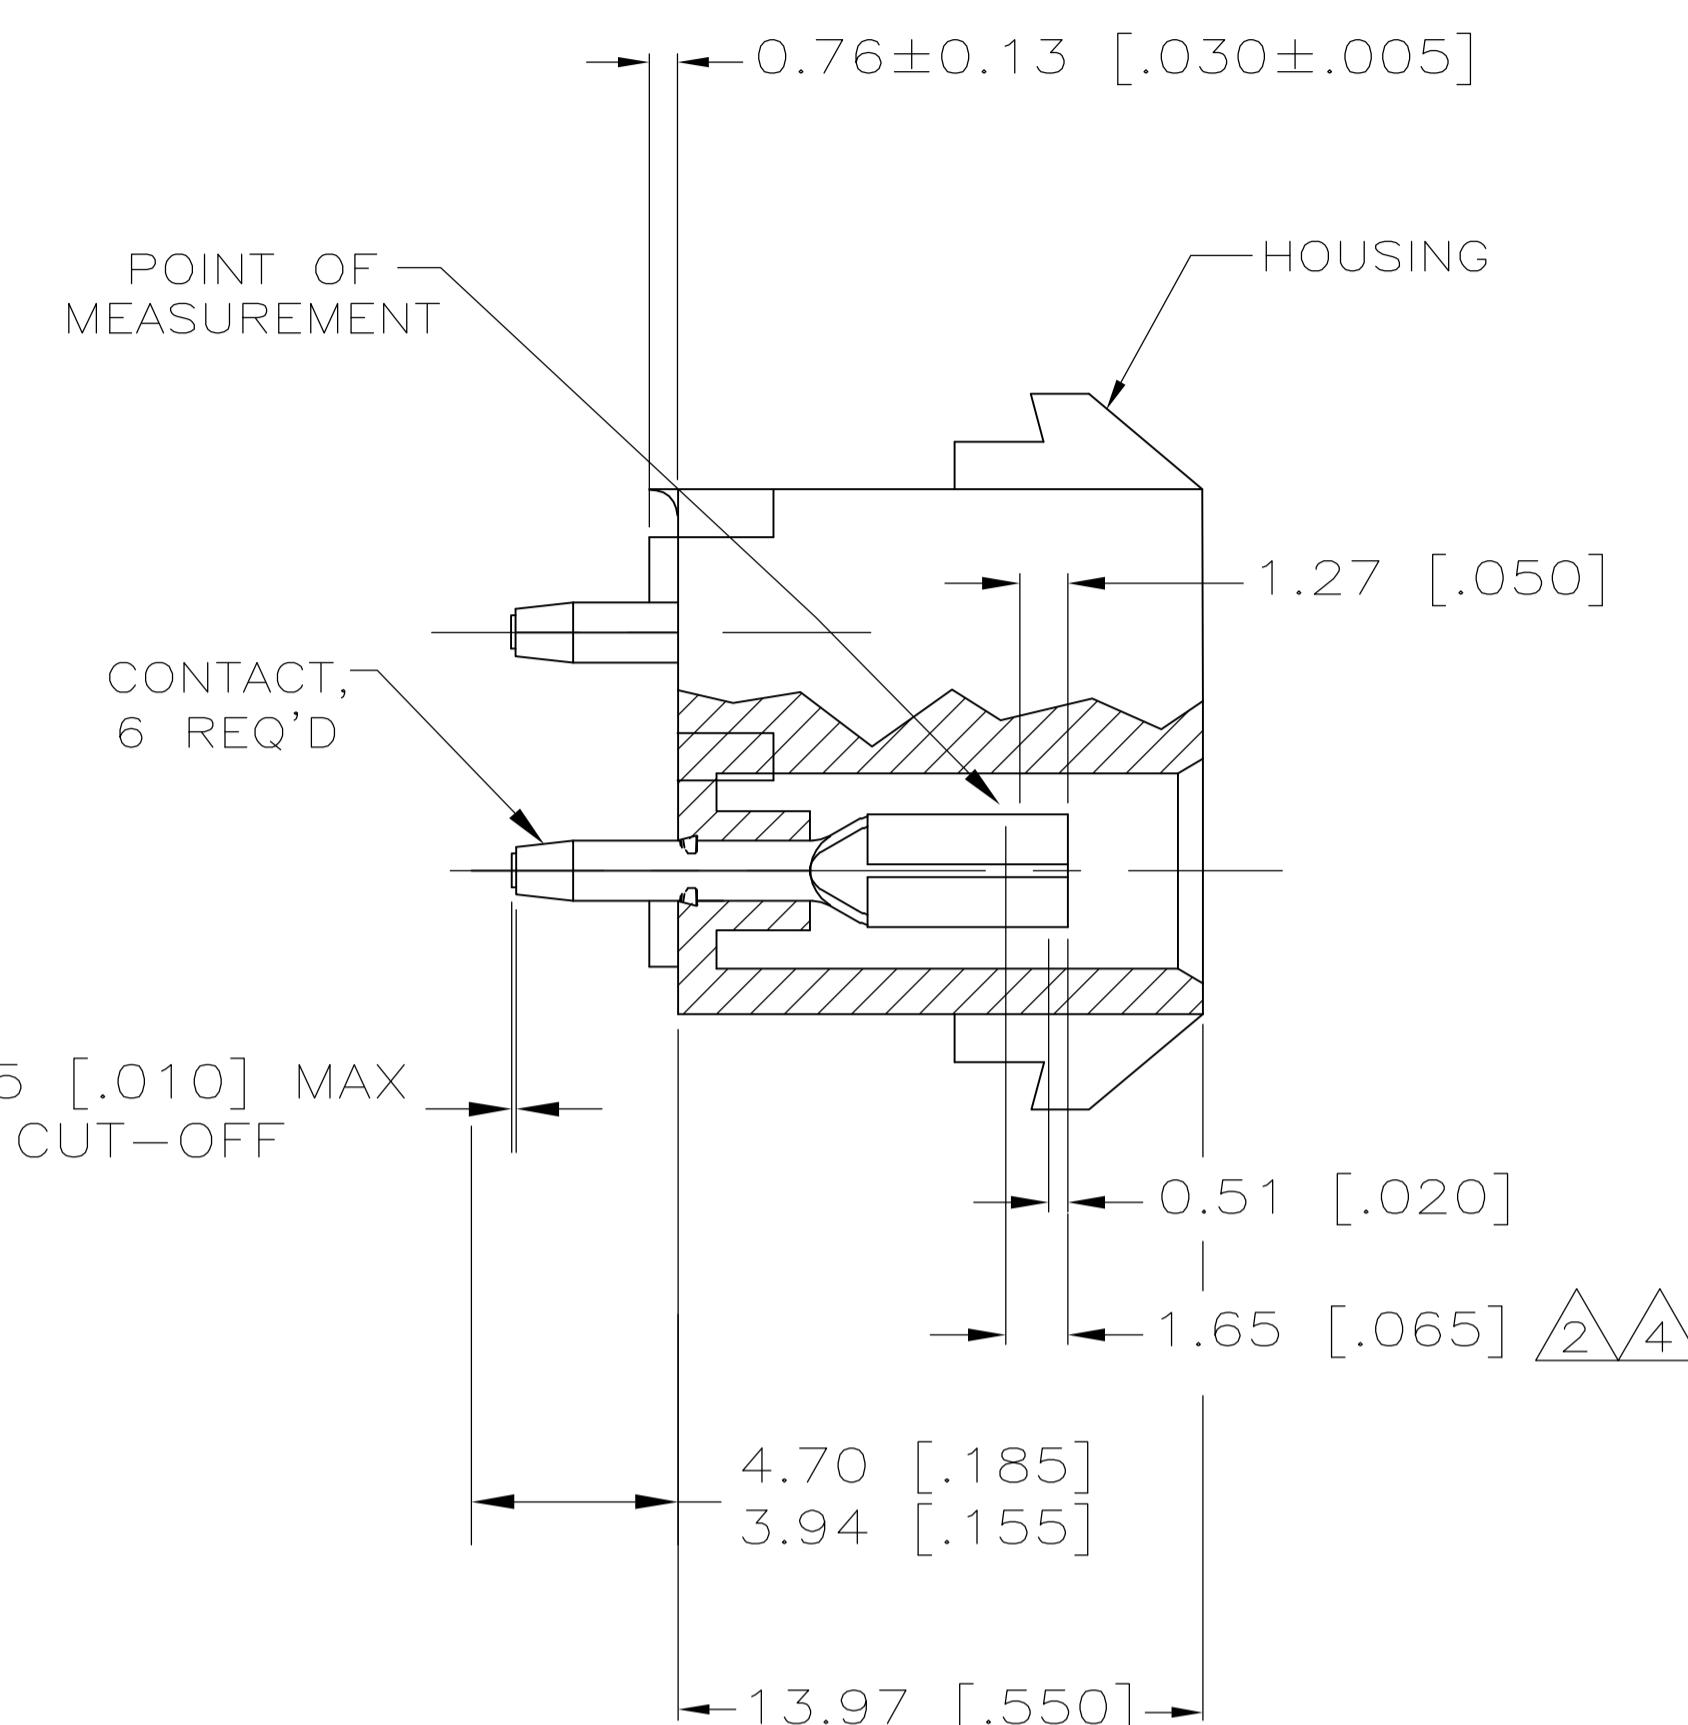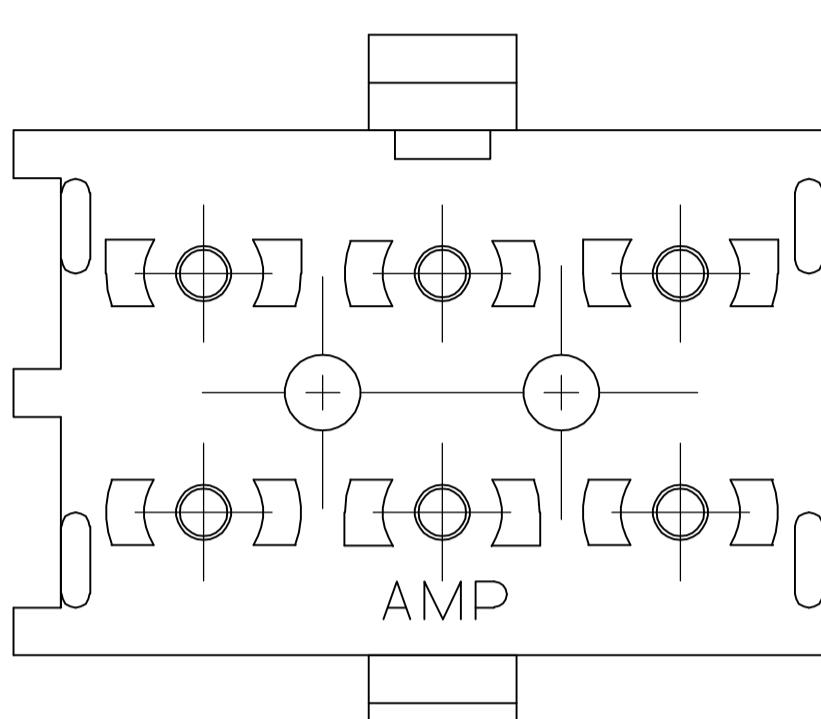

- PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

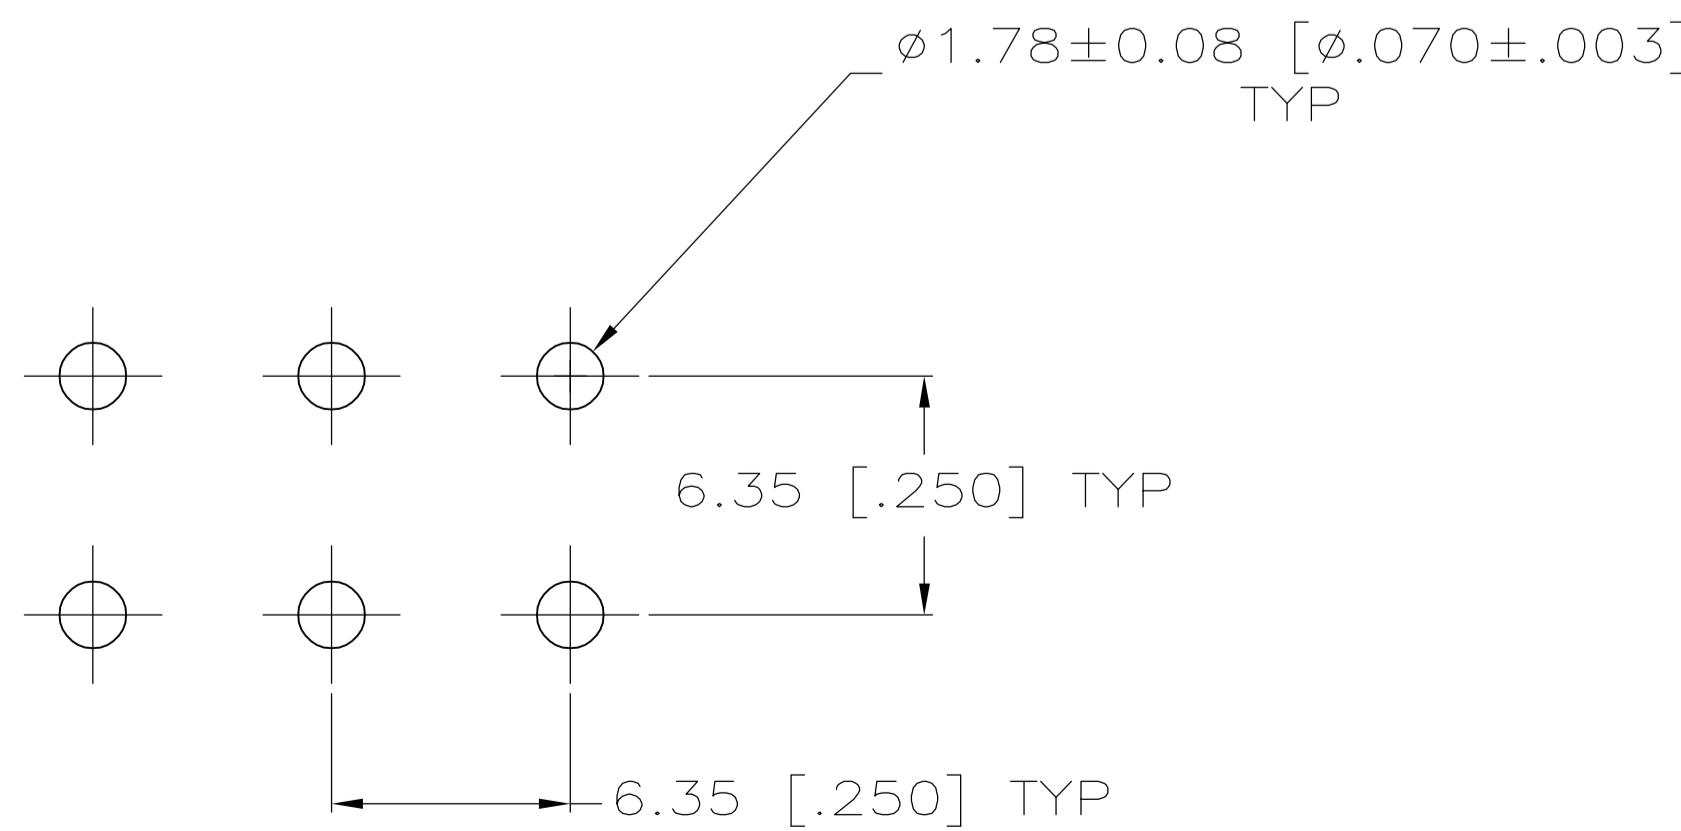

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD

CONTACT	HOUSING	PART NO
PH BRZ GOLD 4	NYLON,UL 94V-0	350827-4
PH BRZ GOLD 2	NYLON,UL 94V-0	350827-2
PH BRZ TIN	NYLON,UL 94V-0	350827-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER COP S. RIDGILL APVO S. RIDGILL PRODUCT SPEC	11OCT2005
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
0 PLC 2 PLC 3 PLC 4 PLC	± ± ± 0.13 [.005]	11OCT2005	NAME 6 CIRCUIT UNIVERSAL MATE-N-LOK (TM) P.C. BOARD SOCKET HEADER ASSEMBLY
ANGLES	±		SIZE CAGE CODE DRAWING NO A100779C-350827
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT —	RESTRICTED TO REV M
			CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV M

METRIC