

Distributed by:




www.Jameco.com ♦ 1-800-831-4242




The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 757425

LOC	DIST	P	F	ZONE	LTR	REVISIONS		
						DESCRIPTION	DATE	APPD
BD	77				C	REDRAWN & REVISED, ECN BD3361	11-89	SS
					D	REV PER ECN BD4888	05/16/91	-
					E	OBS 745071-5, -6 BD6038	06/09/92	CR
					F	REV PER EC 0640-421-98	18 MAR 99	RT
					G	OBS -3 AND REV PER EC OU1D-0126-00	14 NOV 00	RF

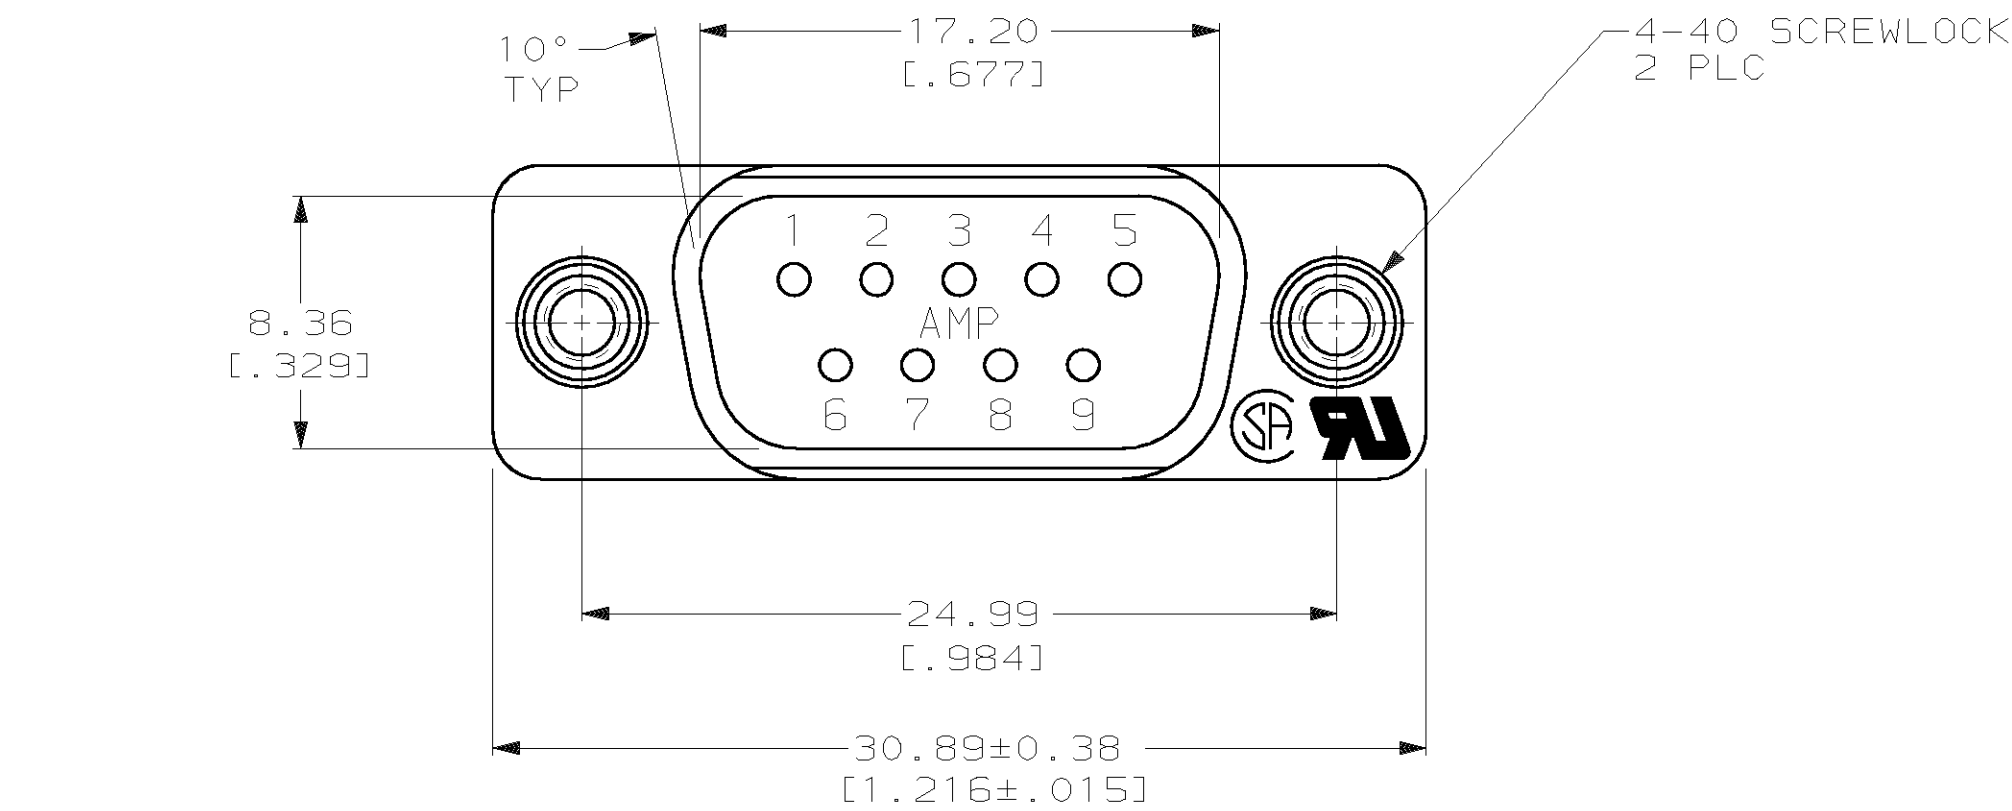

- 1 HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACT: BRASS PER MIL-C-50; SREWLOCK: BRASS PER QQ-B-626.
- 2 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290, COPPER PLATING PER MIL-C-14550.
- 3 GOLD PLATED FOR A LENGTH OF 3.81 [.150] MIN FROM MATING END, GOLD FLASH IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 4 GOLD PLATED FOR A LENGTH OF 3.81 [.150] FROM MATING END, 0.76µm [.000030] MIN GOLD IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 5 1.27µm [.000050] MIN NICKEL OVER COPPER FLASH.

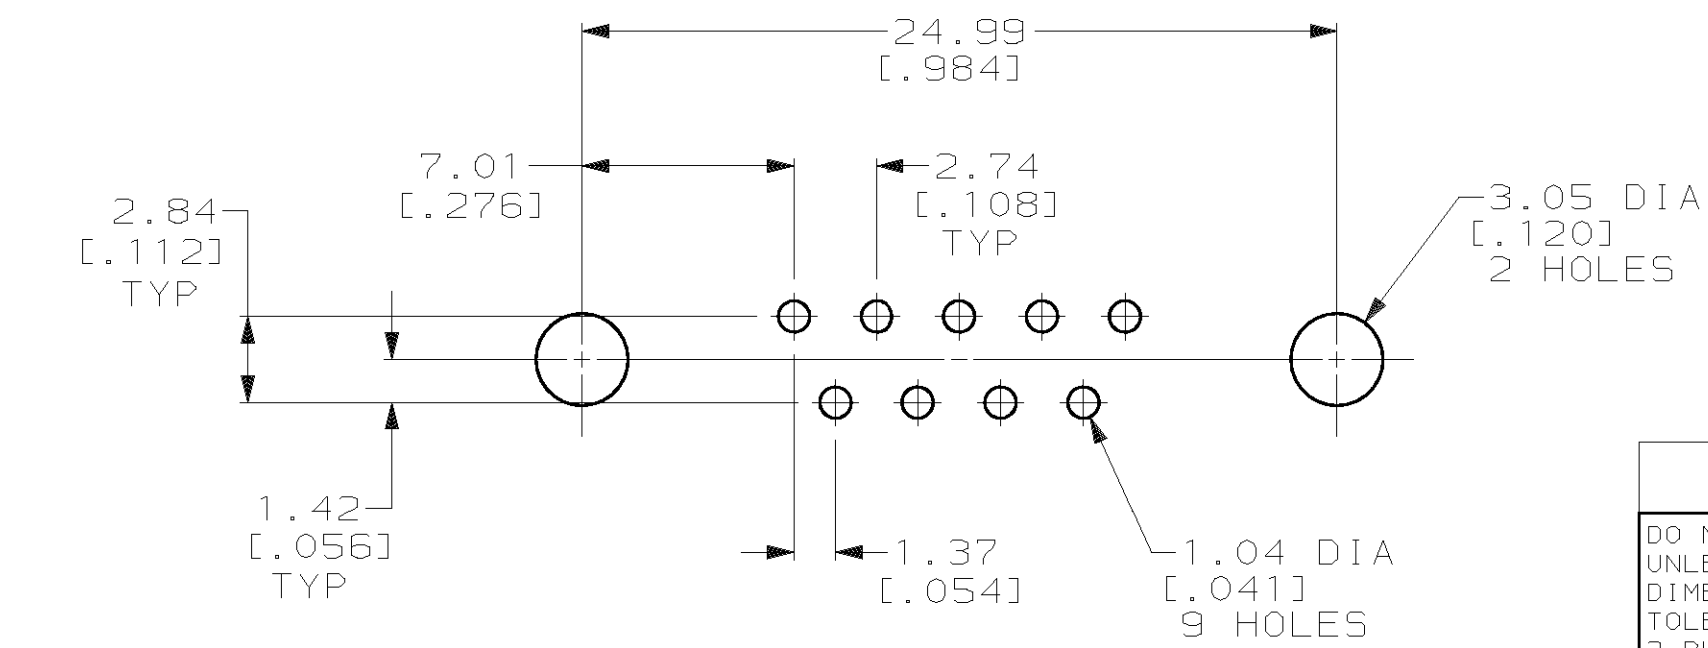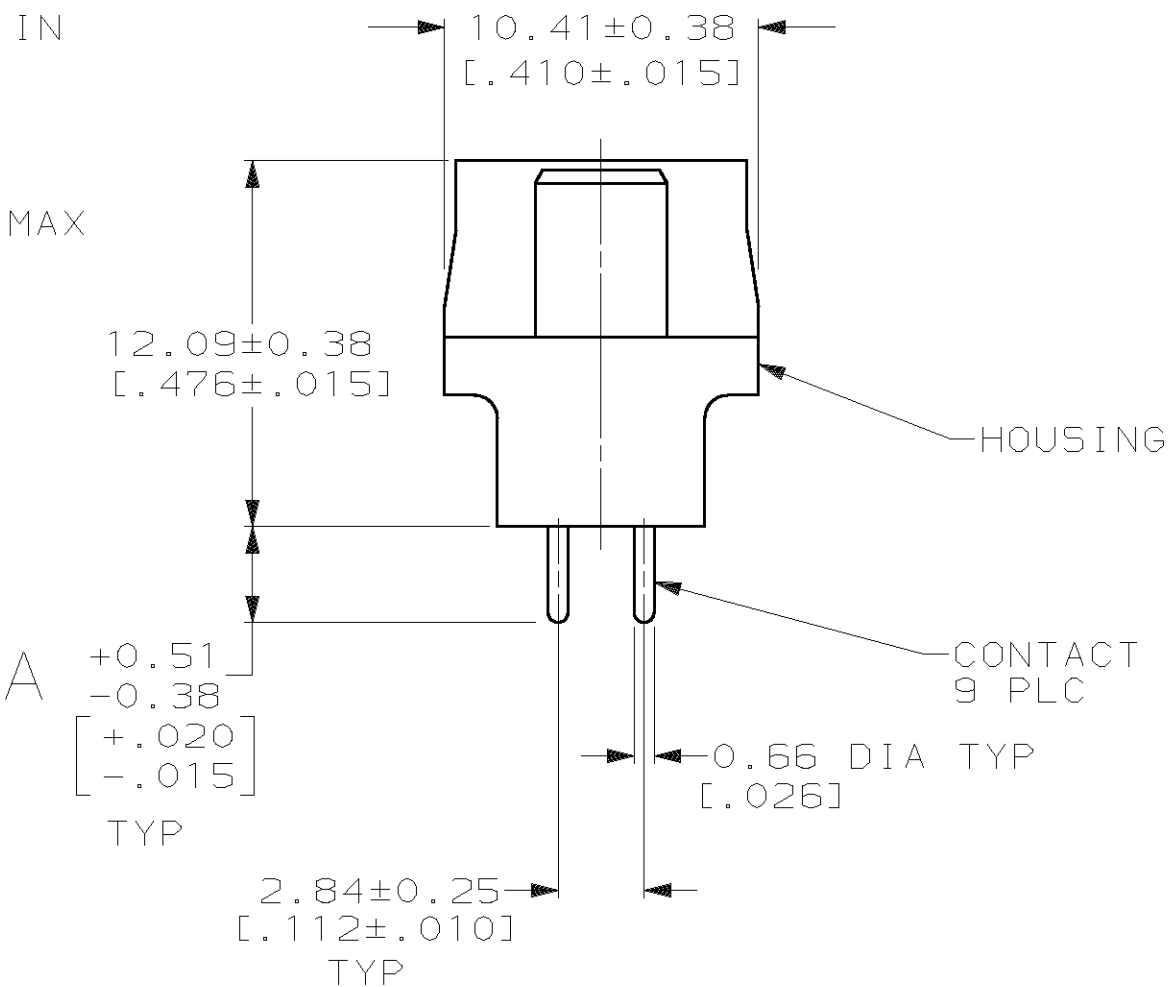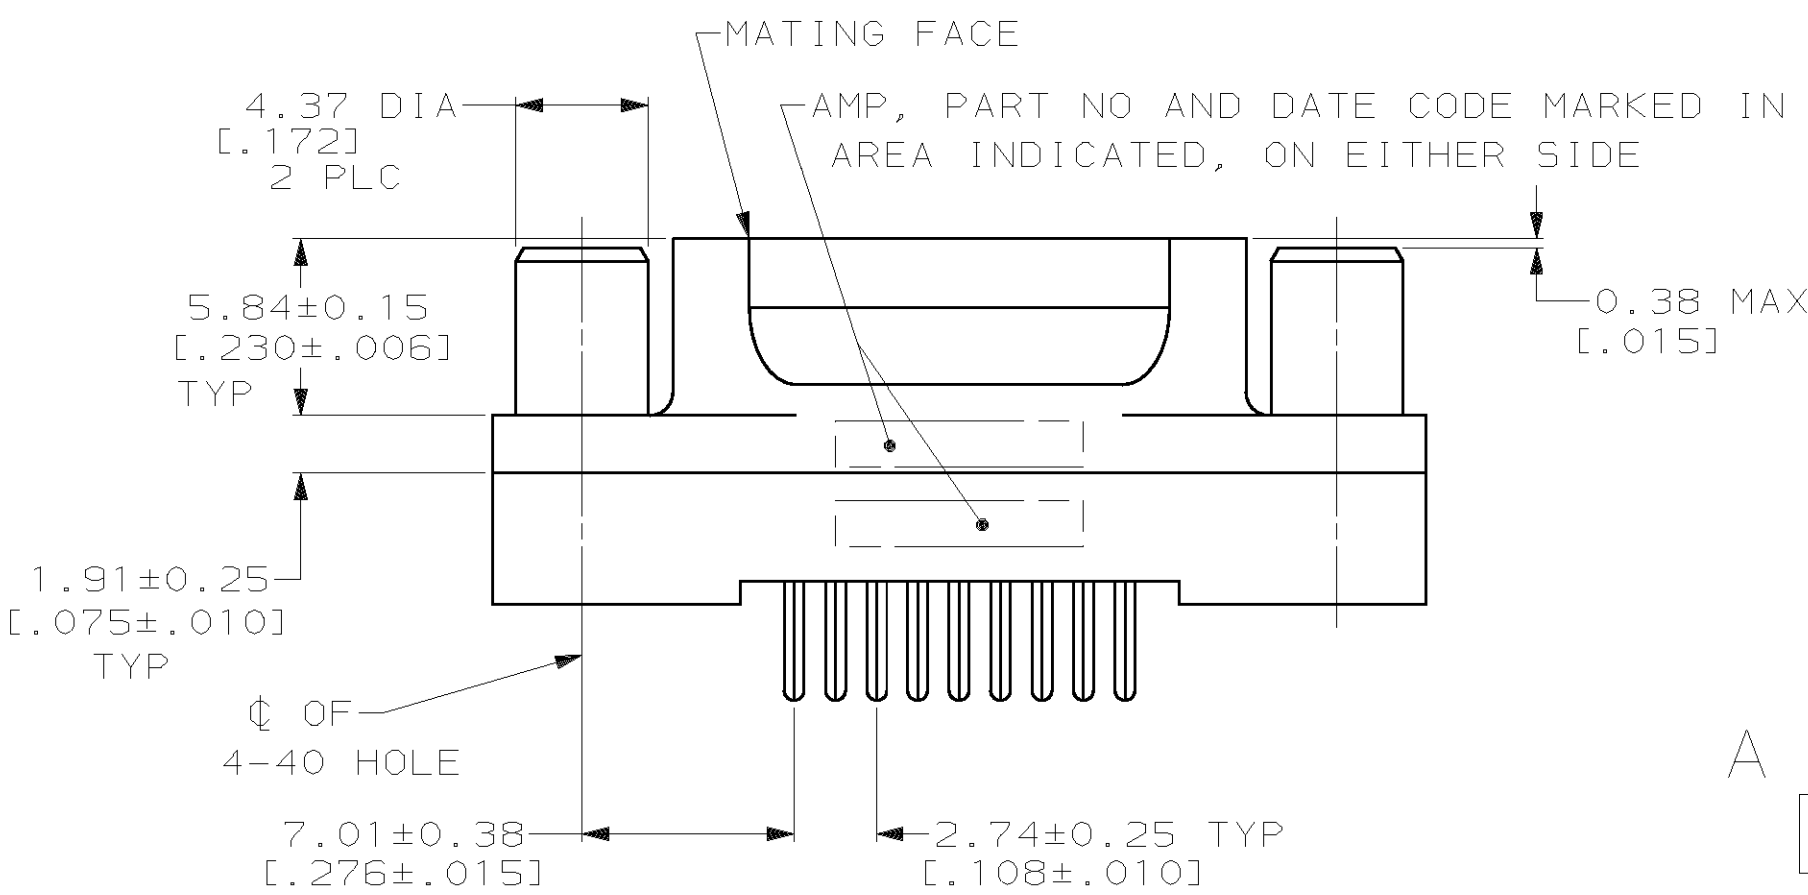

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

OBSOLETE	6.35 [.250]	4	745071-6
OBSOLETE	6.35 [.250]	3	745071-5
	4.32 [.170]	4	745071-4
OBSOLETE	4.32 [.170]	3	745071-3
	3.18 [.125]	4	745071-2
	3.18 [.125]	3	745071-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 [.005] 3 PLC DEC ± - ANGLES ± 2°		DR 11-14-89 J McCLINTON	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL 1		CHK 2-1-90 R.STONE		
FINISH 2		APPD 2-2-90 S.SCHIEFERLY	NAME PLUG ASSEMBLY, SIZE 1, 9 POSN, VERTICAL, AMPLIMITE® HD-20	
CONTACT: SEE TABLE		APPD 2-2-90 C.ROHDE	SIZE C 00779	
SCREWLOCK: 5		PRODUCT SPEC 108-40025	DRAWING NO 745071	
		APPLICATION SPEC -	SCALE 4:1	
		WEIGHT -	SHEET 1 OF 1	