

Distributed by:

JAMECO[®]
ELECTRONICS



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 840405

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00		B	REVISED PER 063B-0330-02	18-JUN-02	KW CJ

1. FLASH ALLOWANCE TO BE
0.05 MAX HIGH x 0.03 MAX THICK.
2. FLASH NOT PERMITTED IN THIS AREA.
3. ALLOWABLE FLASH IN RING GATE AREA.
4. INSULATION DIAMETER MUST BE MET
REGARDLESS OF WHICH WIRE SIZE IS USED.
5. THIS SEAL IS NOT COMPATIBLE WITH
26-30 AWG CONTACTS. 26 AWG WIRE
MUST BE USED WITH 22-26 AWG CONTACTS.

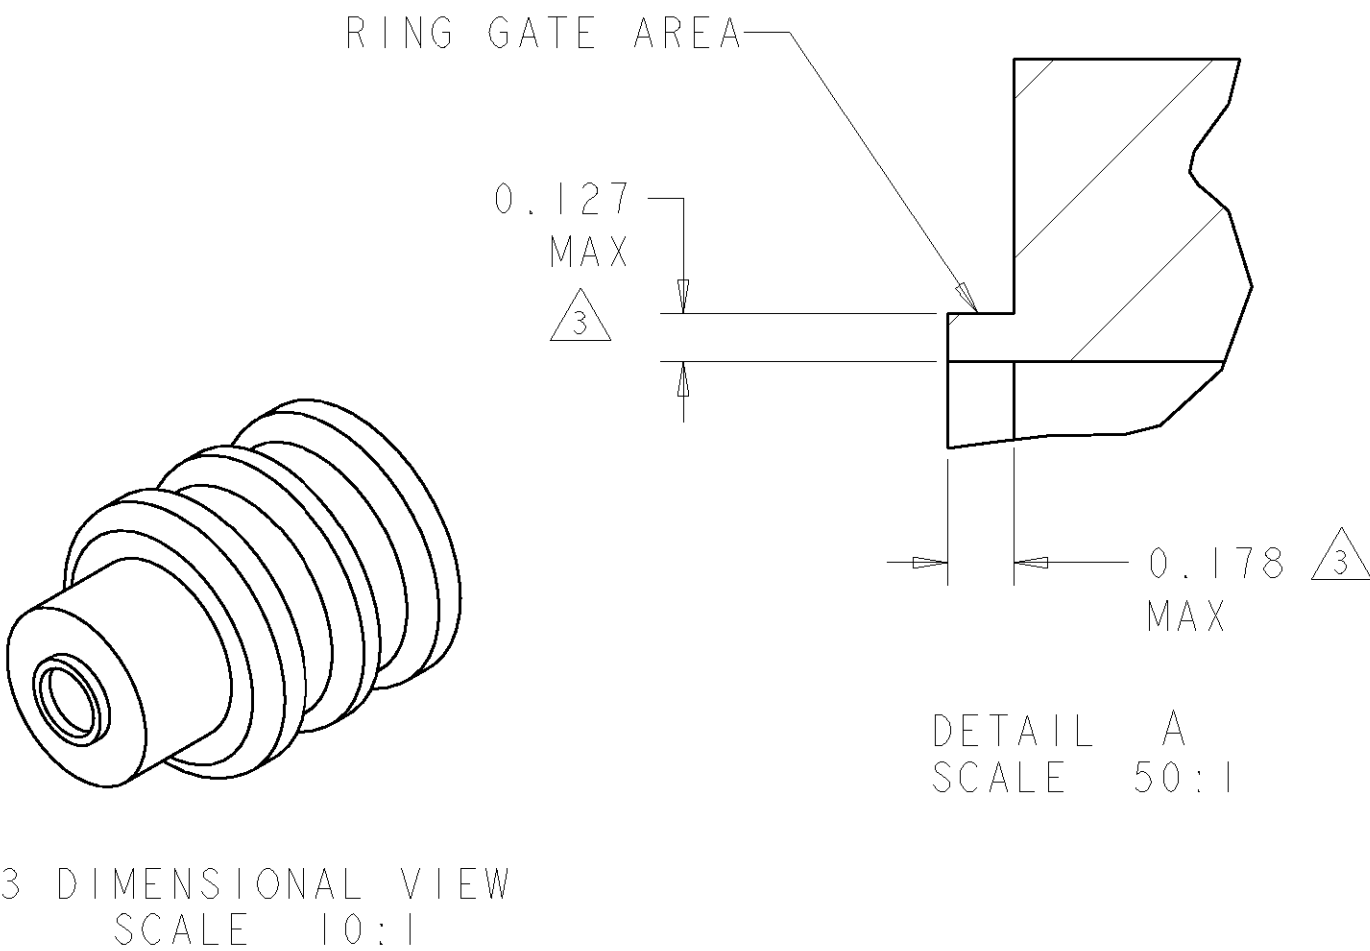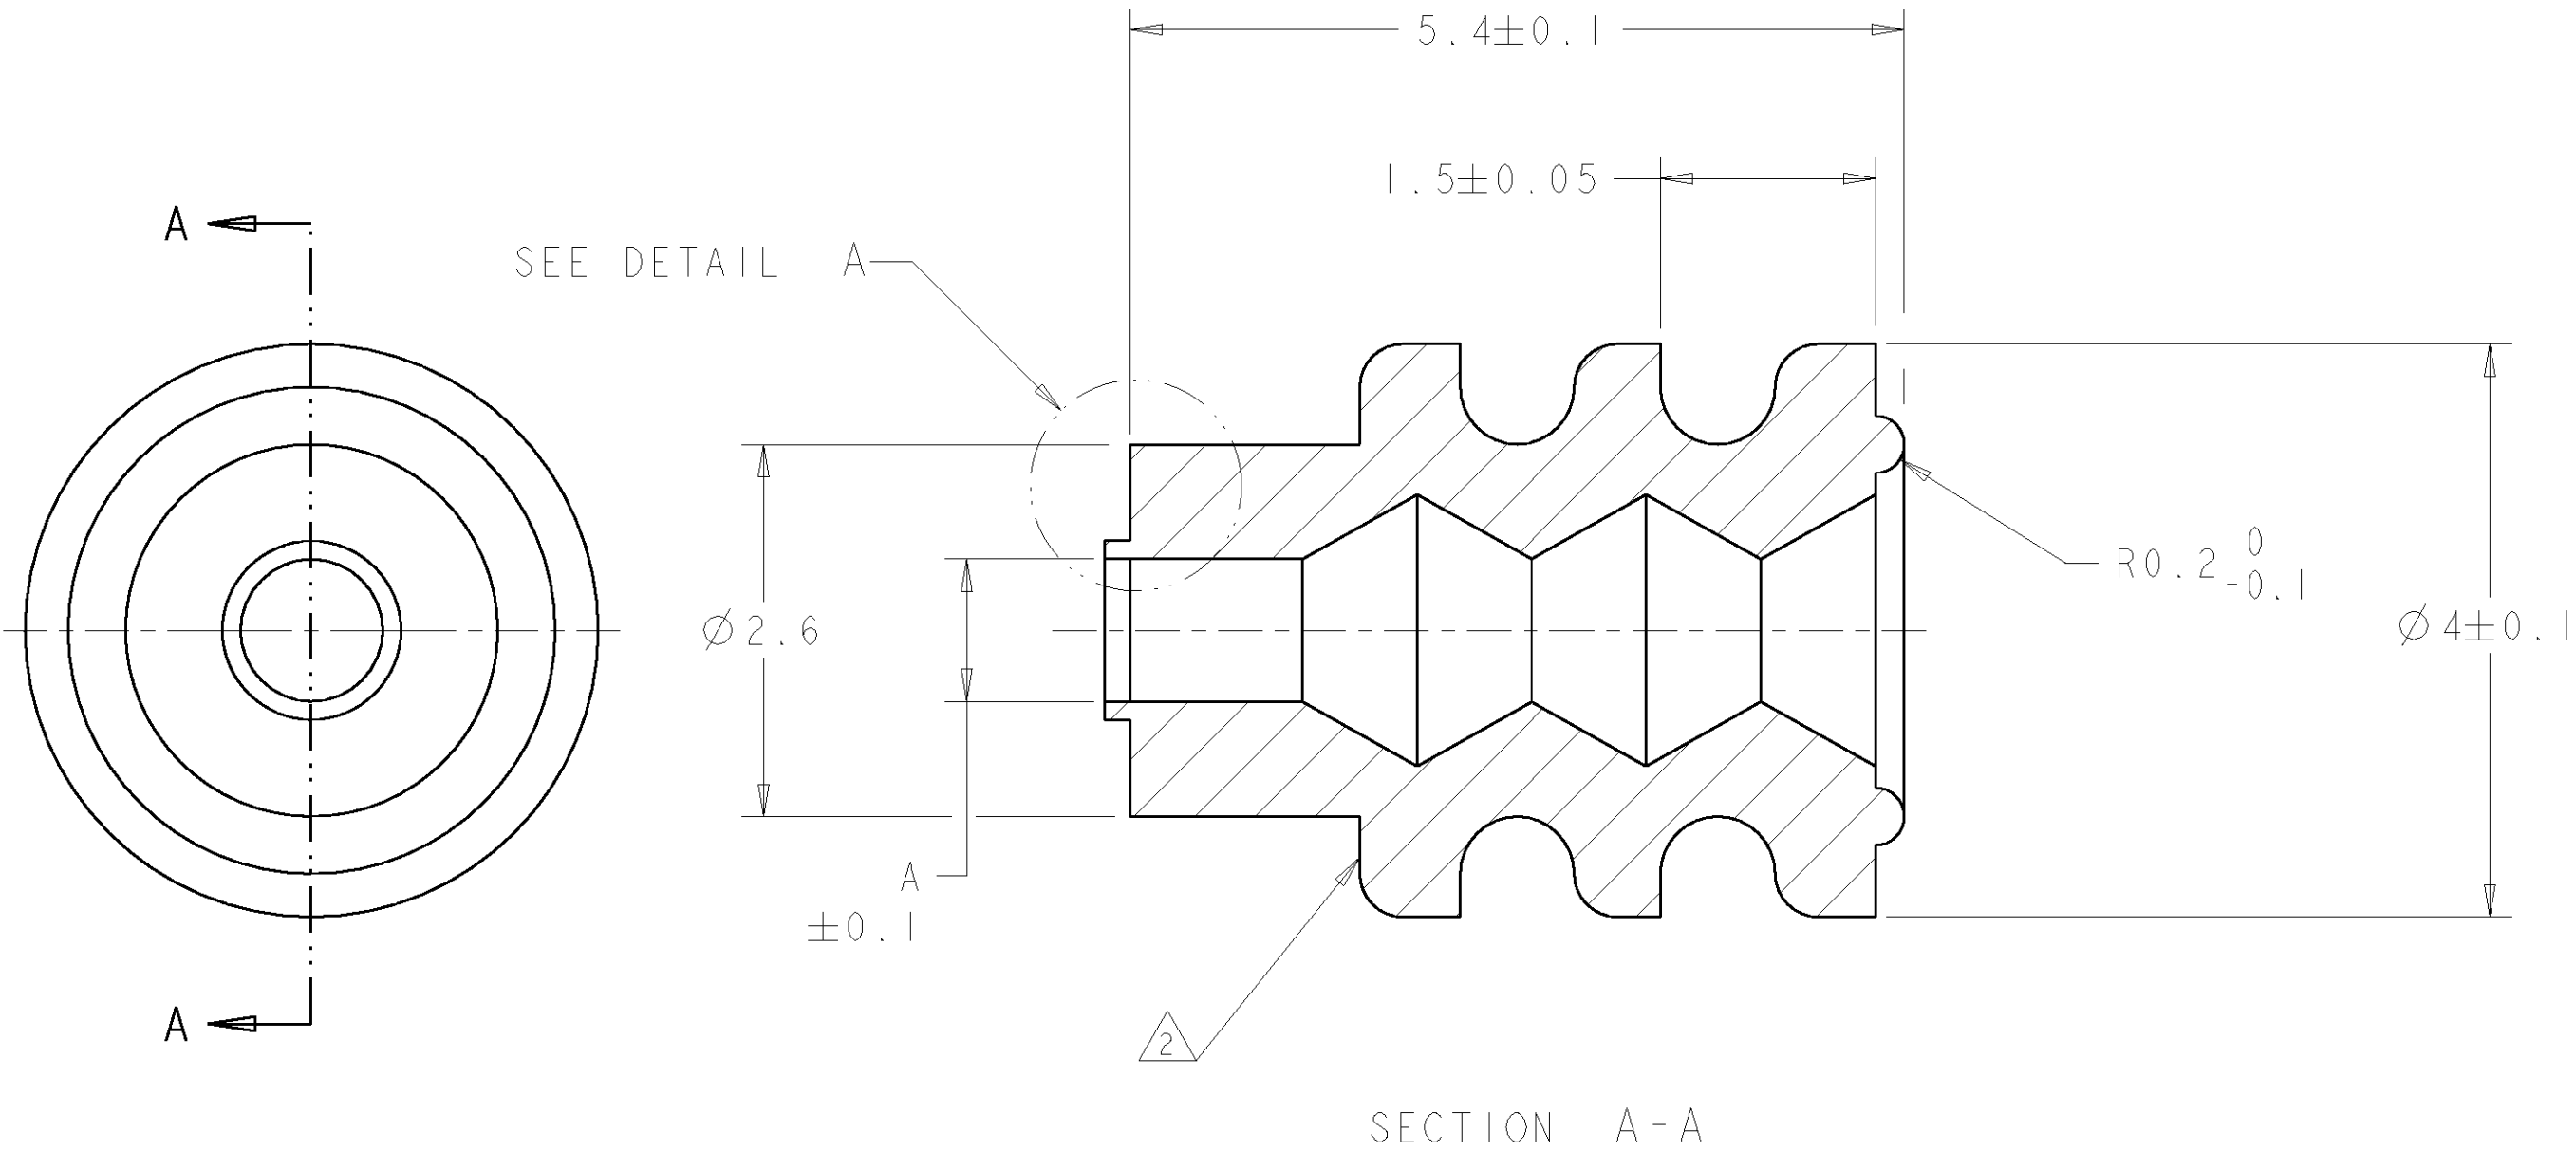

METRIC

BLUE	1.02-2.11	18-26 AWG	1.0	794758-1
COLOR	INSULATION DIAMETER 4	WIRE RANGE 4	DIM A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN K. WHITAKER CHK C. JONES APVD C. JONES	15FEB2001 15FEB2001 15FEB2001	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SINGLE WIRE SEAL, MINI UNIVERSAL MATE-N-LOK™	
0 PLC ±.2 1 PLC ±.2 2 PLC ±.2 3 PLC ±.2 4 PLC ±.2 ANGLES ±2° FINISH -		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	
MATERIAL SILICON RUBBER		CUSTOMER DRAWING		CAGE CODE 00779	DRAWING NO 794758
				RESTRICTED TO -	
				SCALE 20:1	SHEET 1 OF 1 REV B