

Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 841627

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00	K		REVISED PER ECO-06-006795	17MAY06	KW JE

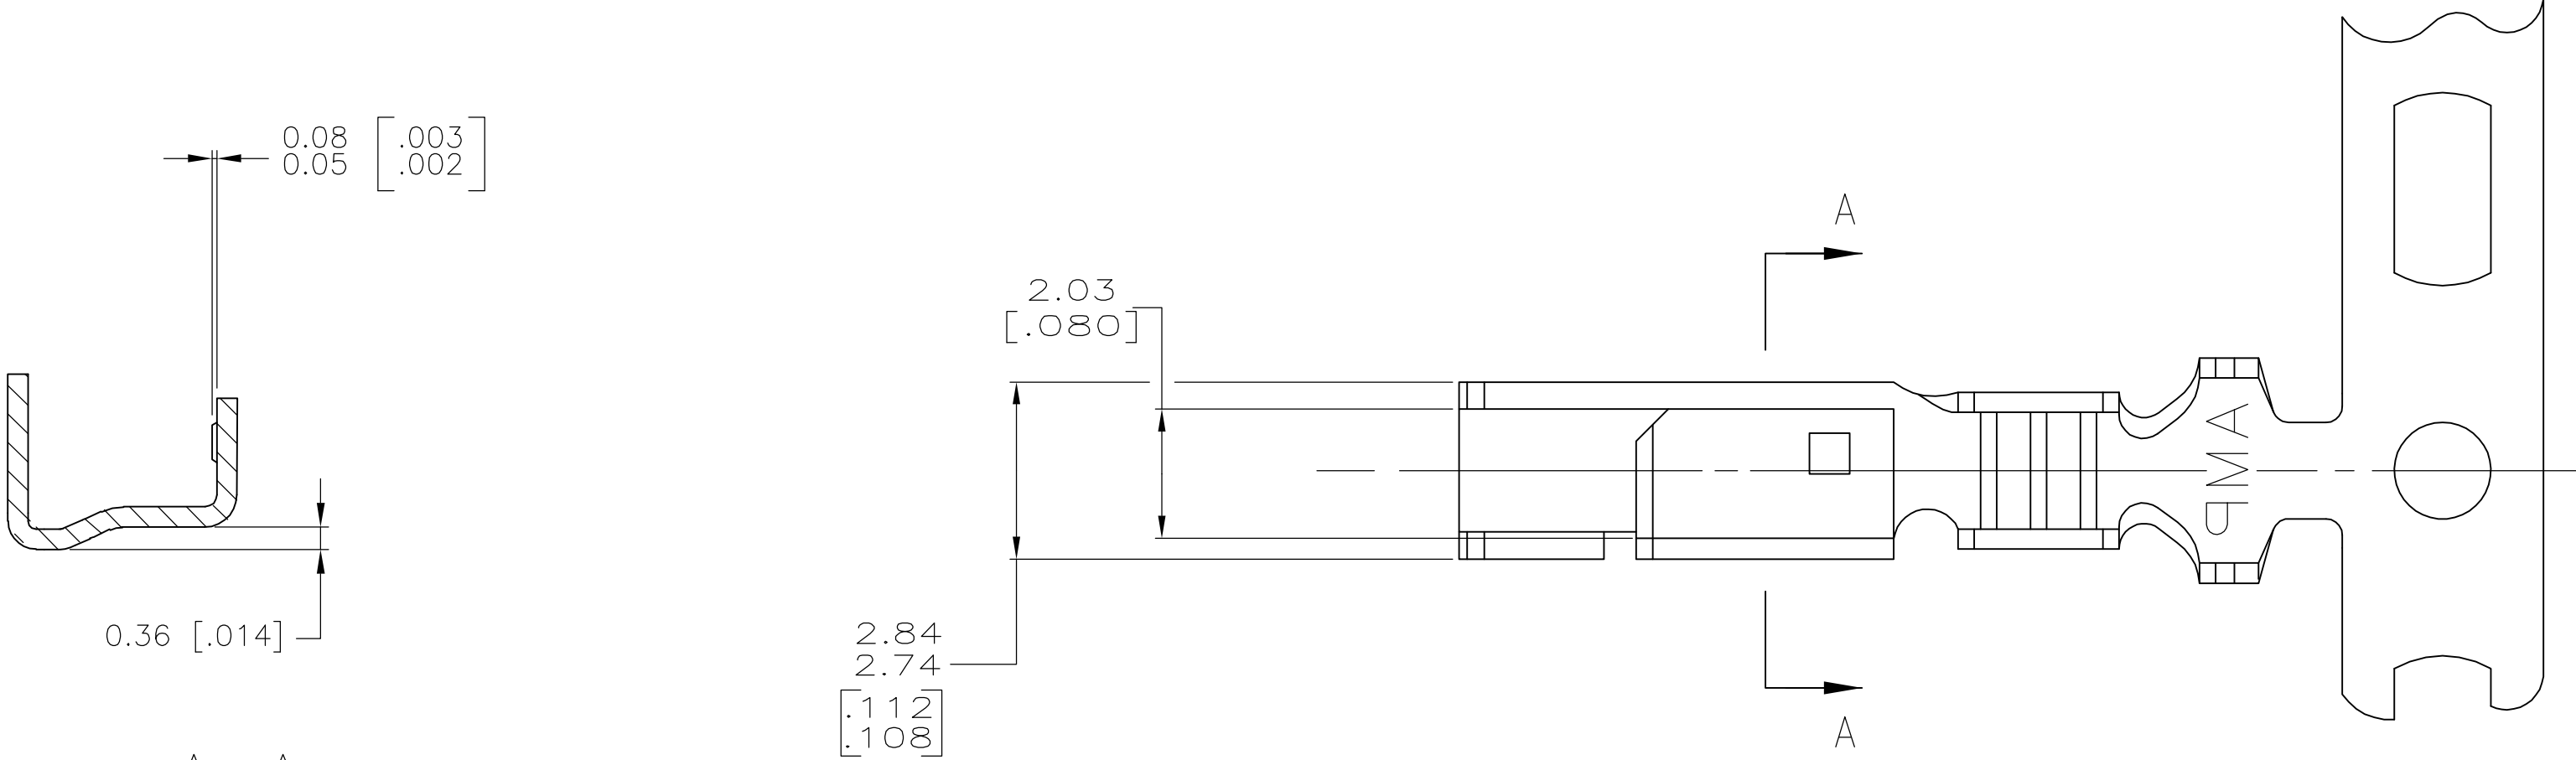


SECTION A-A

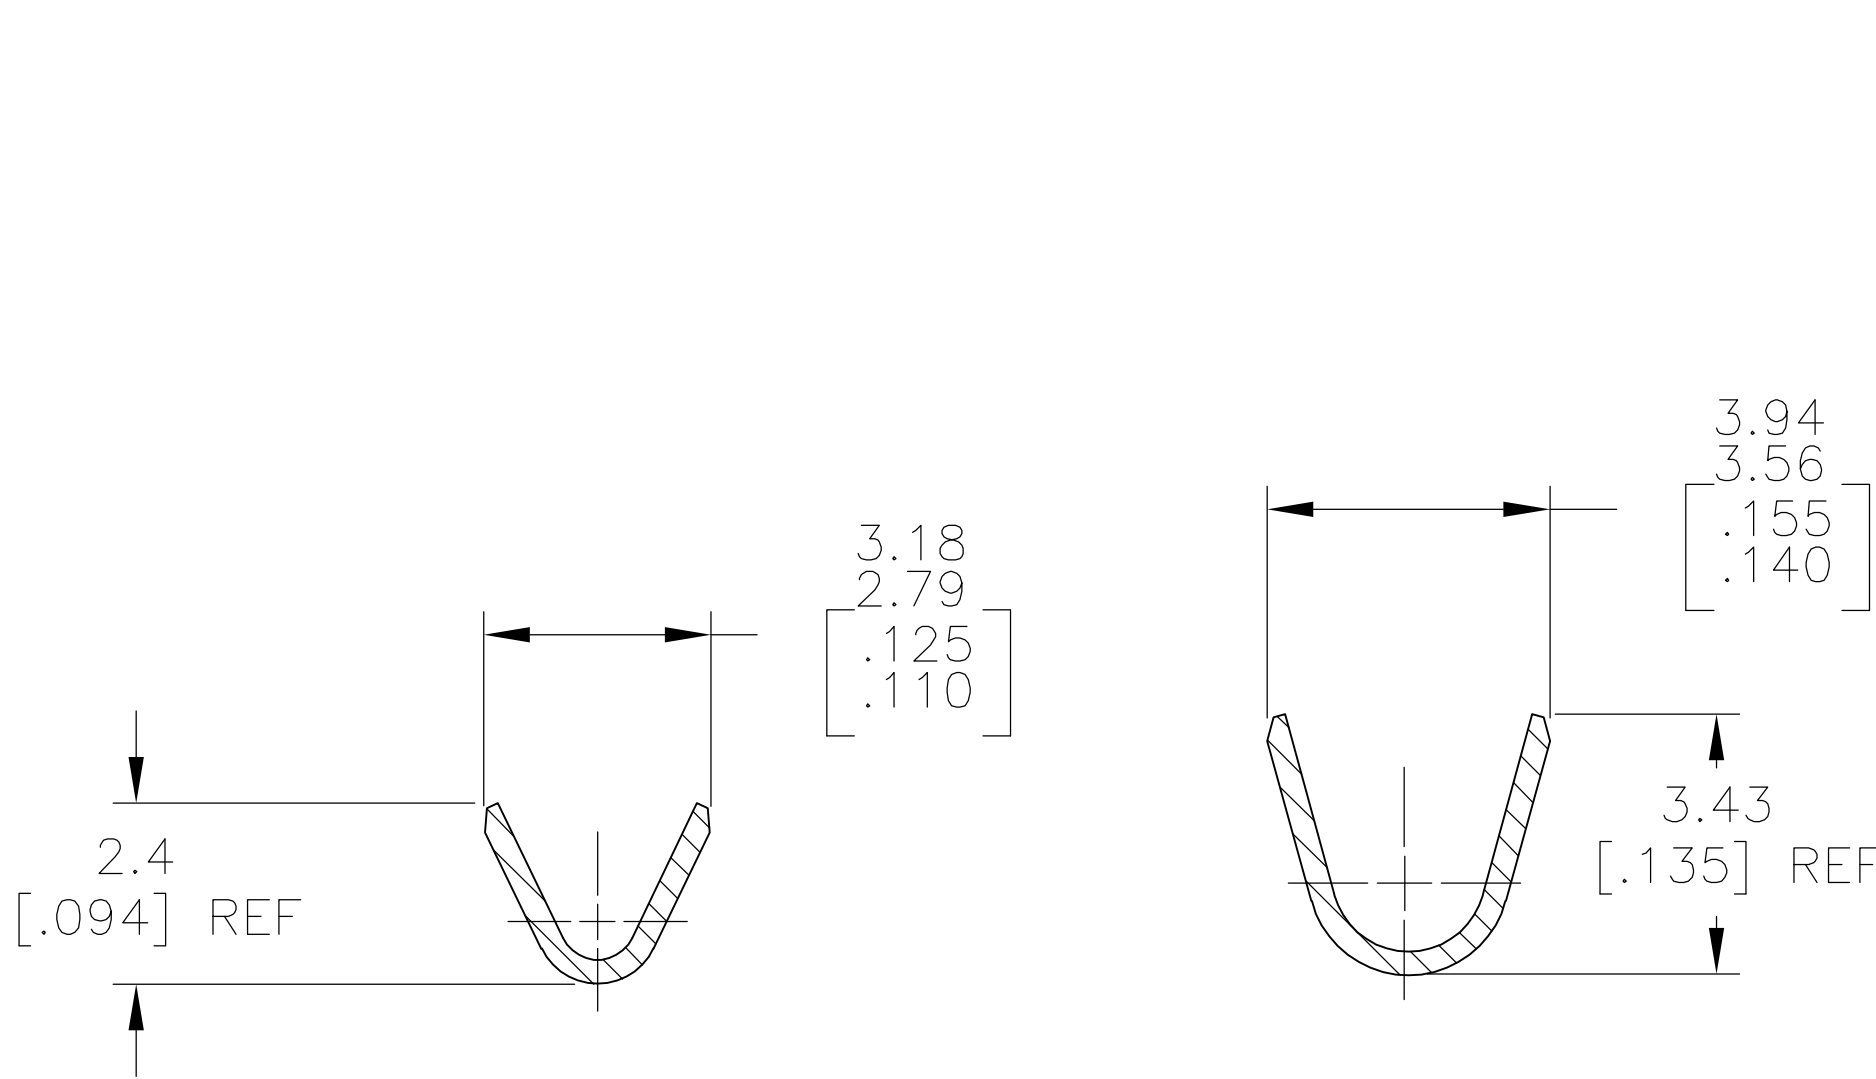

SECTION B-B

SECTION C-C

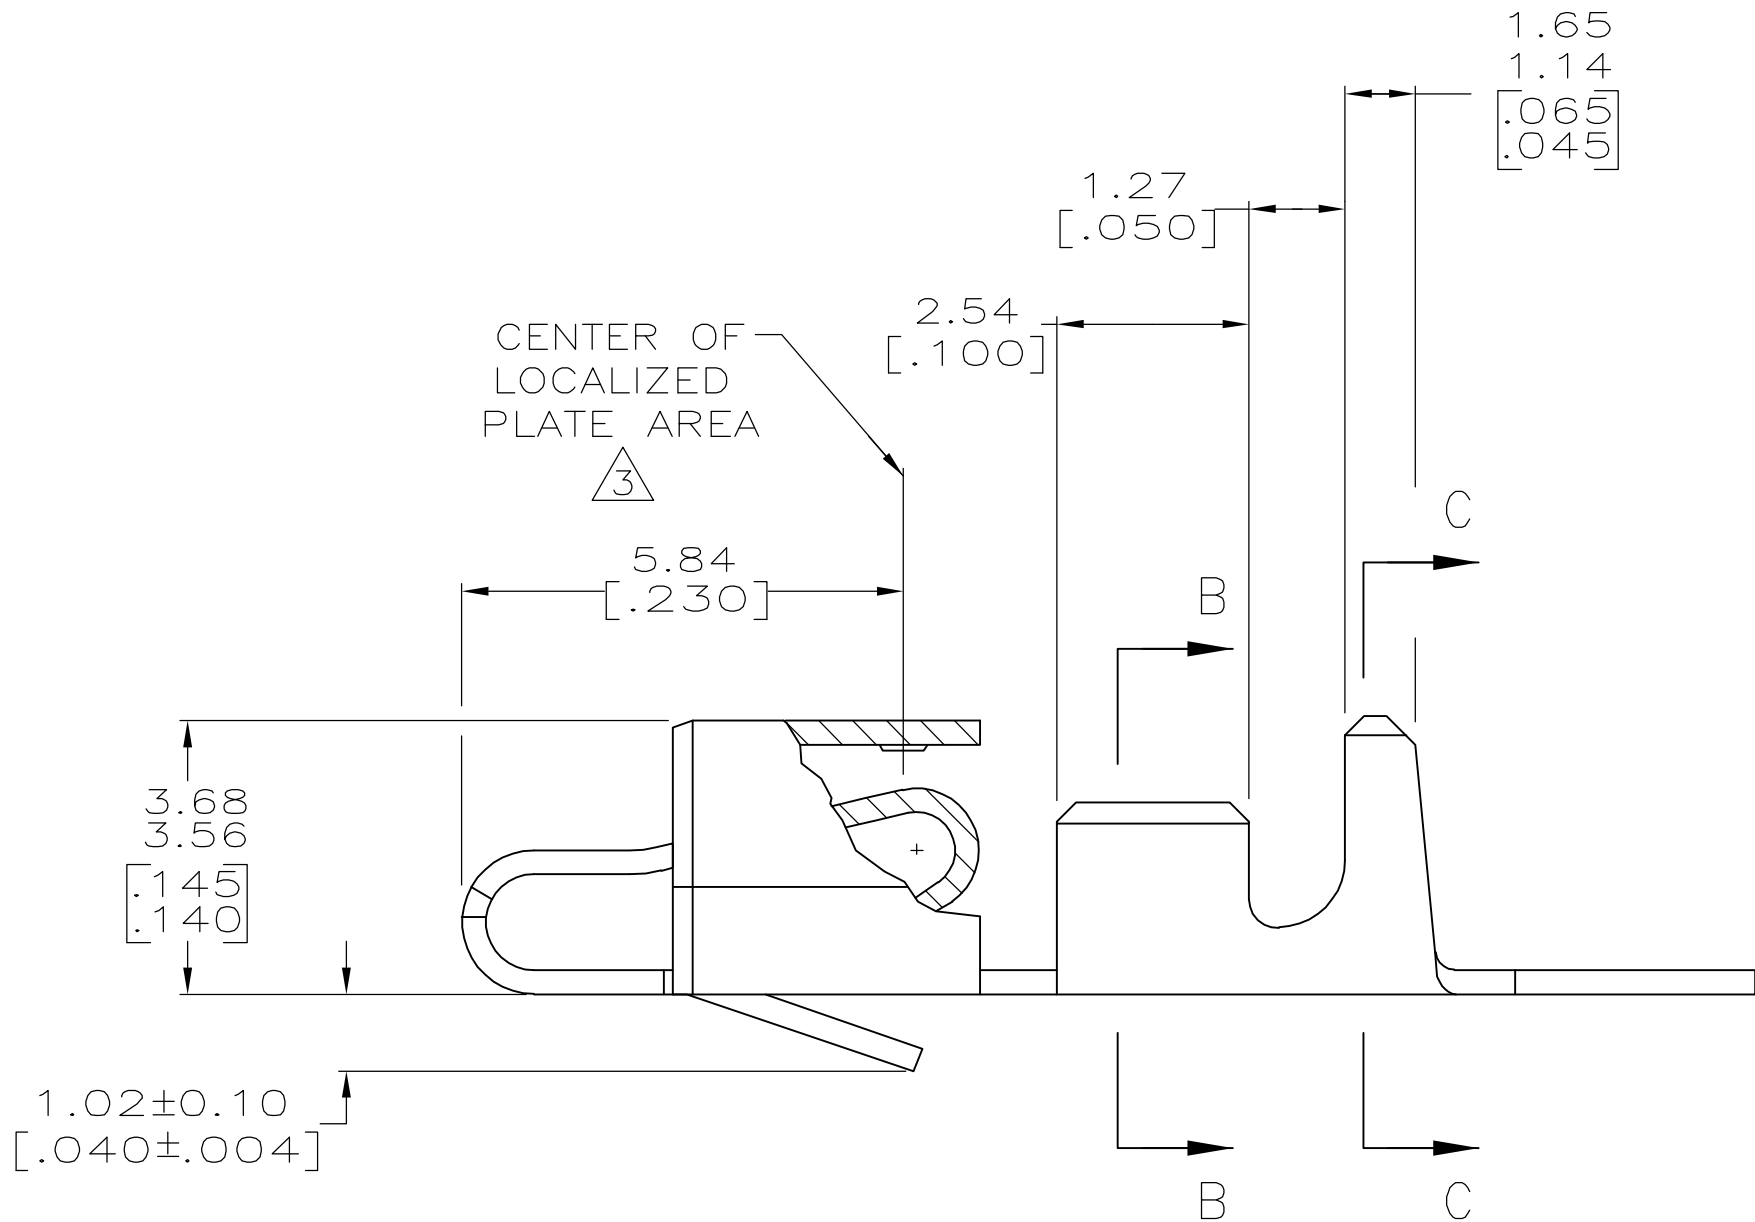

1. INSULATION RANGE: 1.09-2.79 [.043-.110]
WIRE RANGE: 0.2-0.9 mm² (24-18) AWG.
2. 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER
0.00127 [.000050] MIN NICKEL.
3. 0.00076 [.000030] MIN THICK GOLD STRIPES IN
LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER
0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE
CONTACT.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.
5. 0.00203 [.000080] MIN TIN OVER
0.00127 [.000050] MIN NICKEL.

5	3-770476-1
3	770476-2
2	770476-1
FINISH	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	18OCT2004	tyco Electronics		Tyco Electronics Corporation Greensboro, NC 27409	
DIMENSIONS: mm [INCHES]		CHK J. ELLIS	-	NAME J. ELLIS		PRODUCT SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE		CAGE CODE	
0 PLC ± -		WEIGHT		DRAWING NO		RESTRICTED TO	
1 PLC ± -		CUSTOMER DRAWING		SCALE		SHEET	
2 PLC ± -		10:1		1		OF	
3 PLC ± .005		A1		00779		1	
4 PLC ± -		C=770476		REV		K	
ANGLES FINISH ± 0.30°							