

Distributed by:




JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242




The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 846145


LOC	DIST	REVISIONS					
CM	00	F	LTR	DESCRIPTION	DATE	DWN	APVD
			R	REVISED PER 0G3B-1100-04	25JULY05	KW	SR

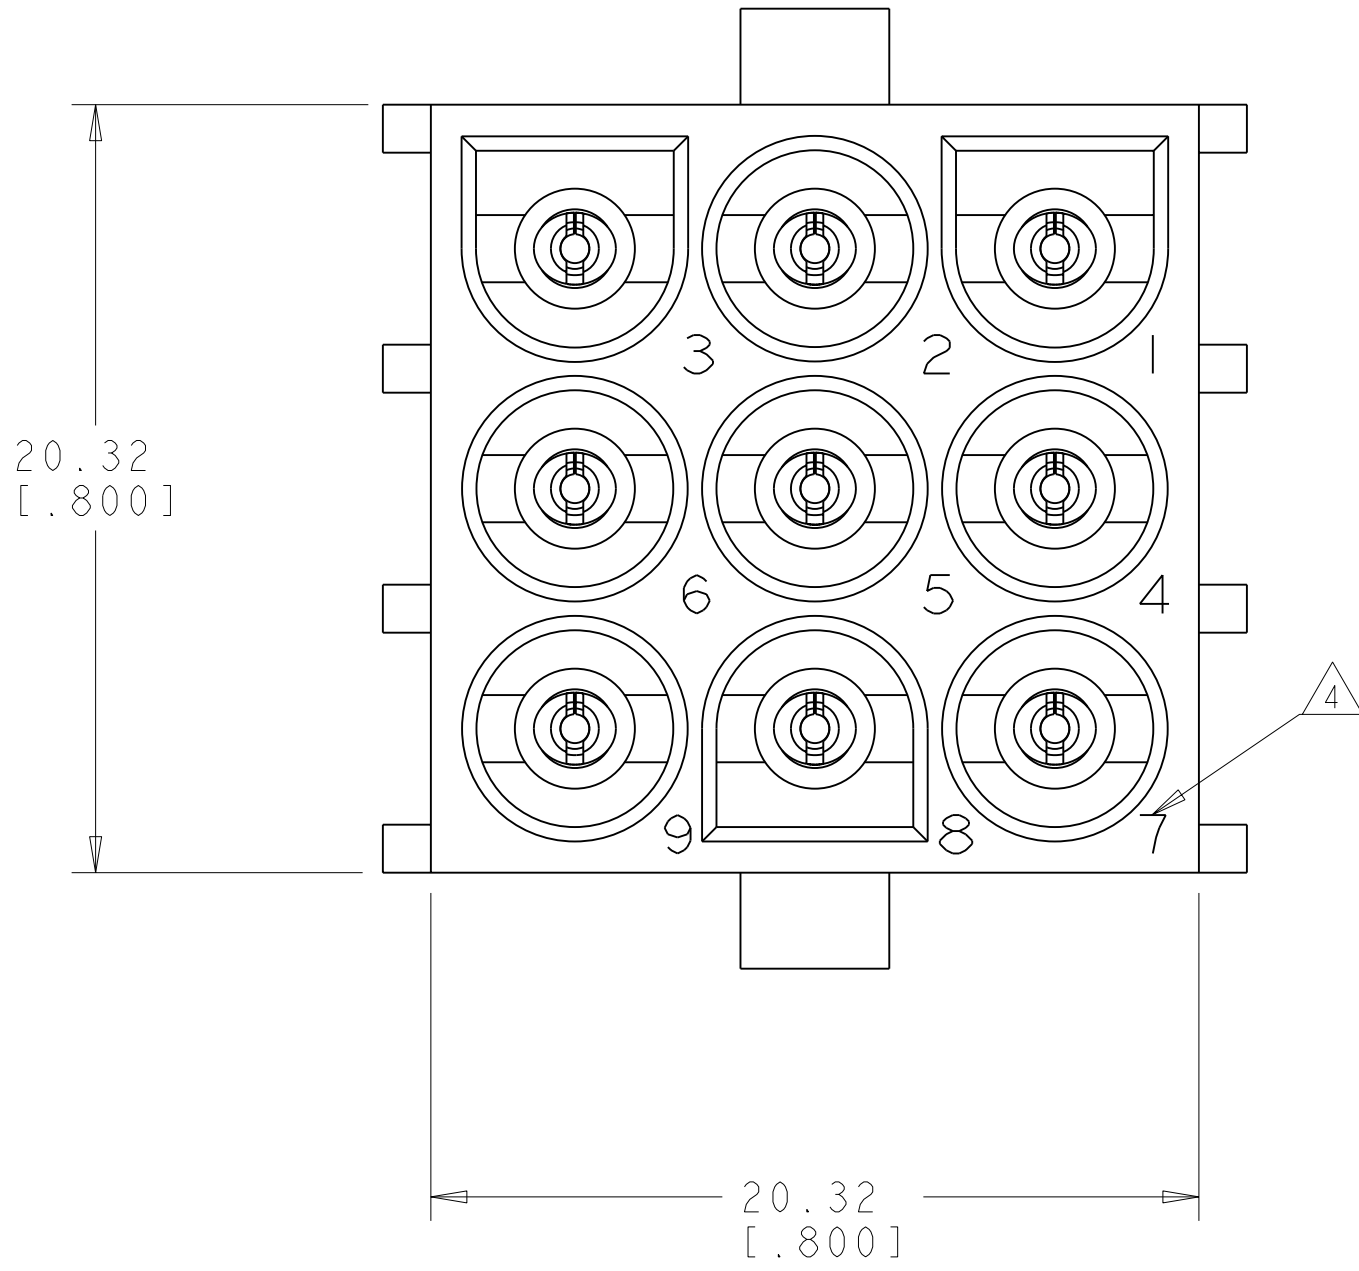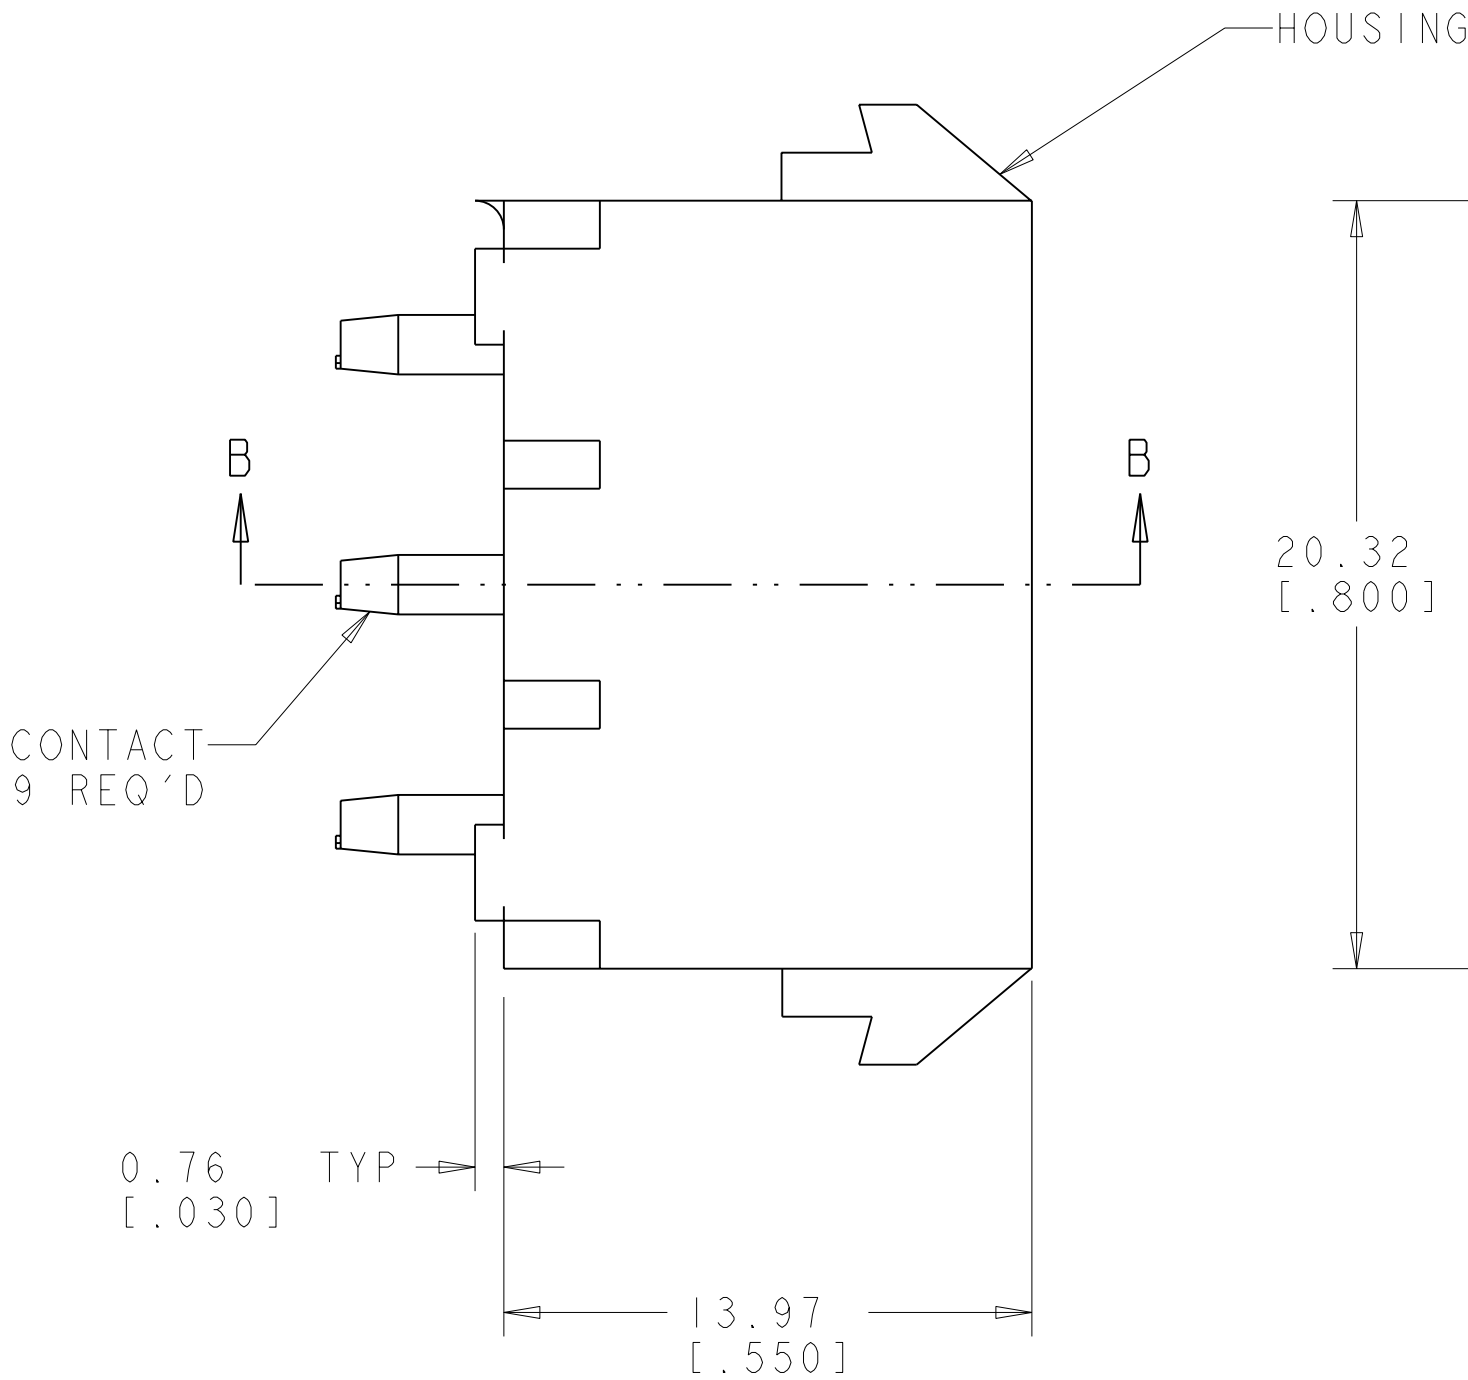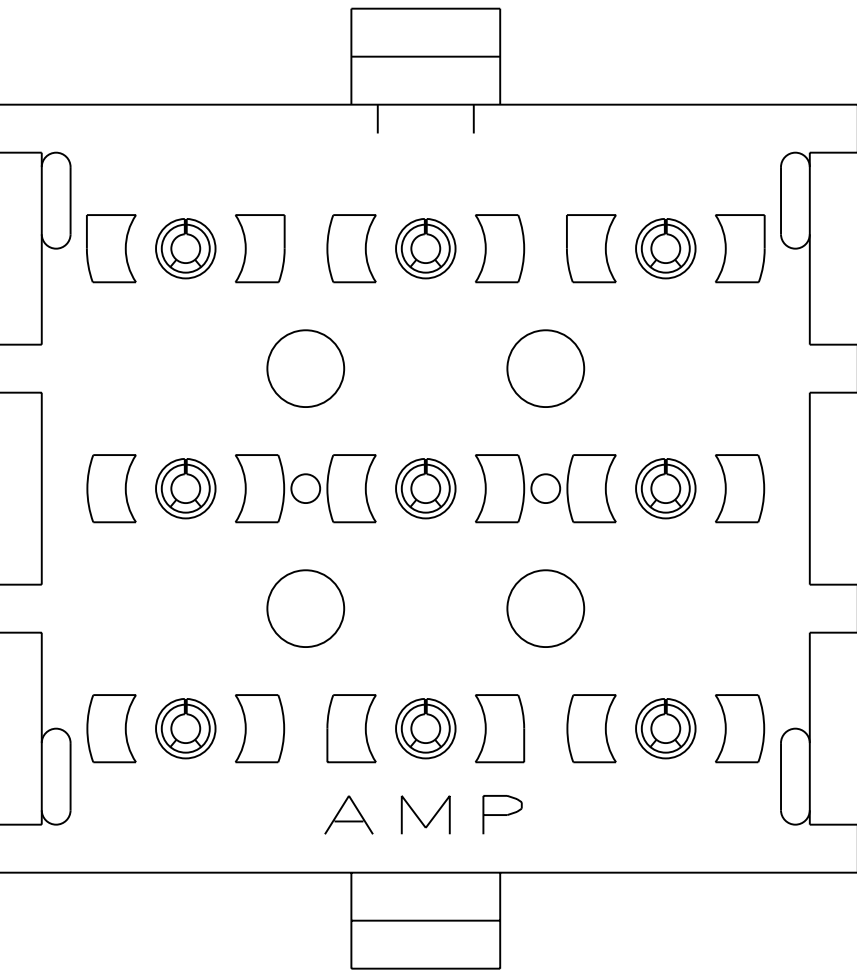

- PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
- MATES WITH HOUSING 350720.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.

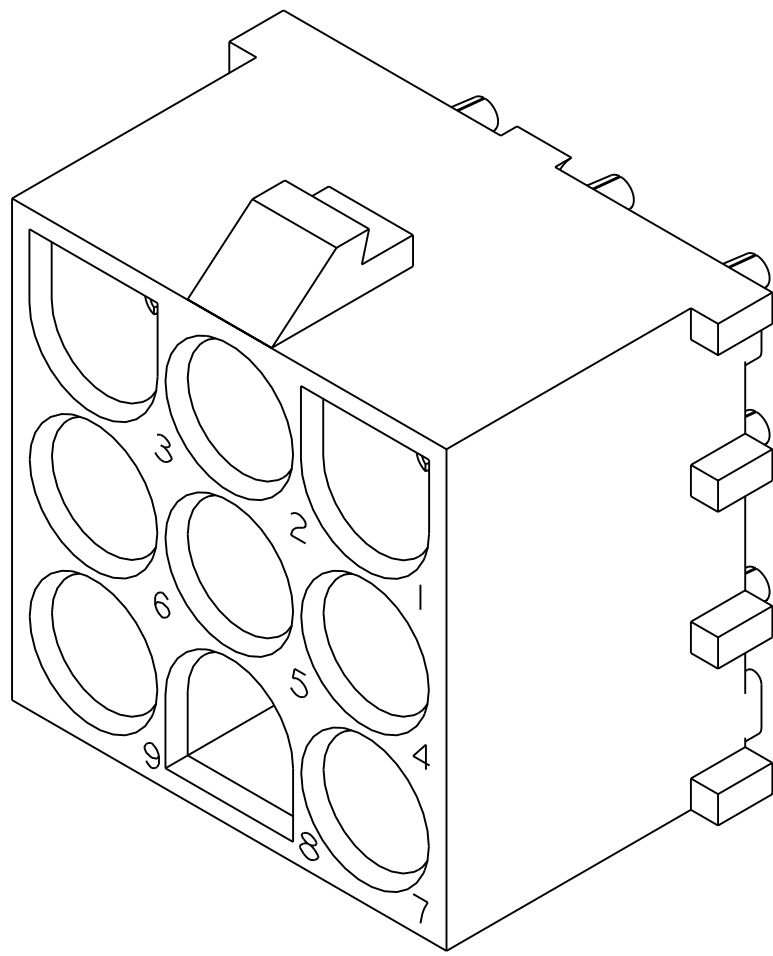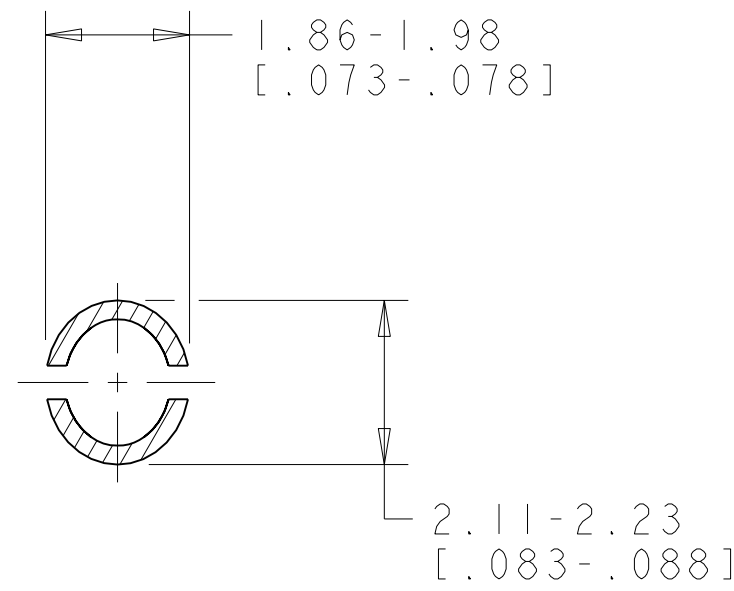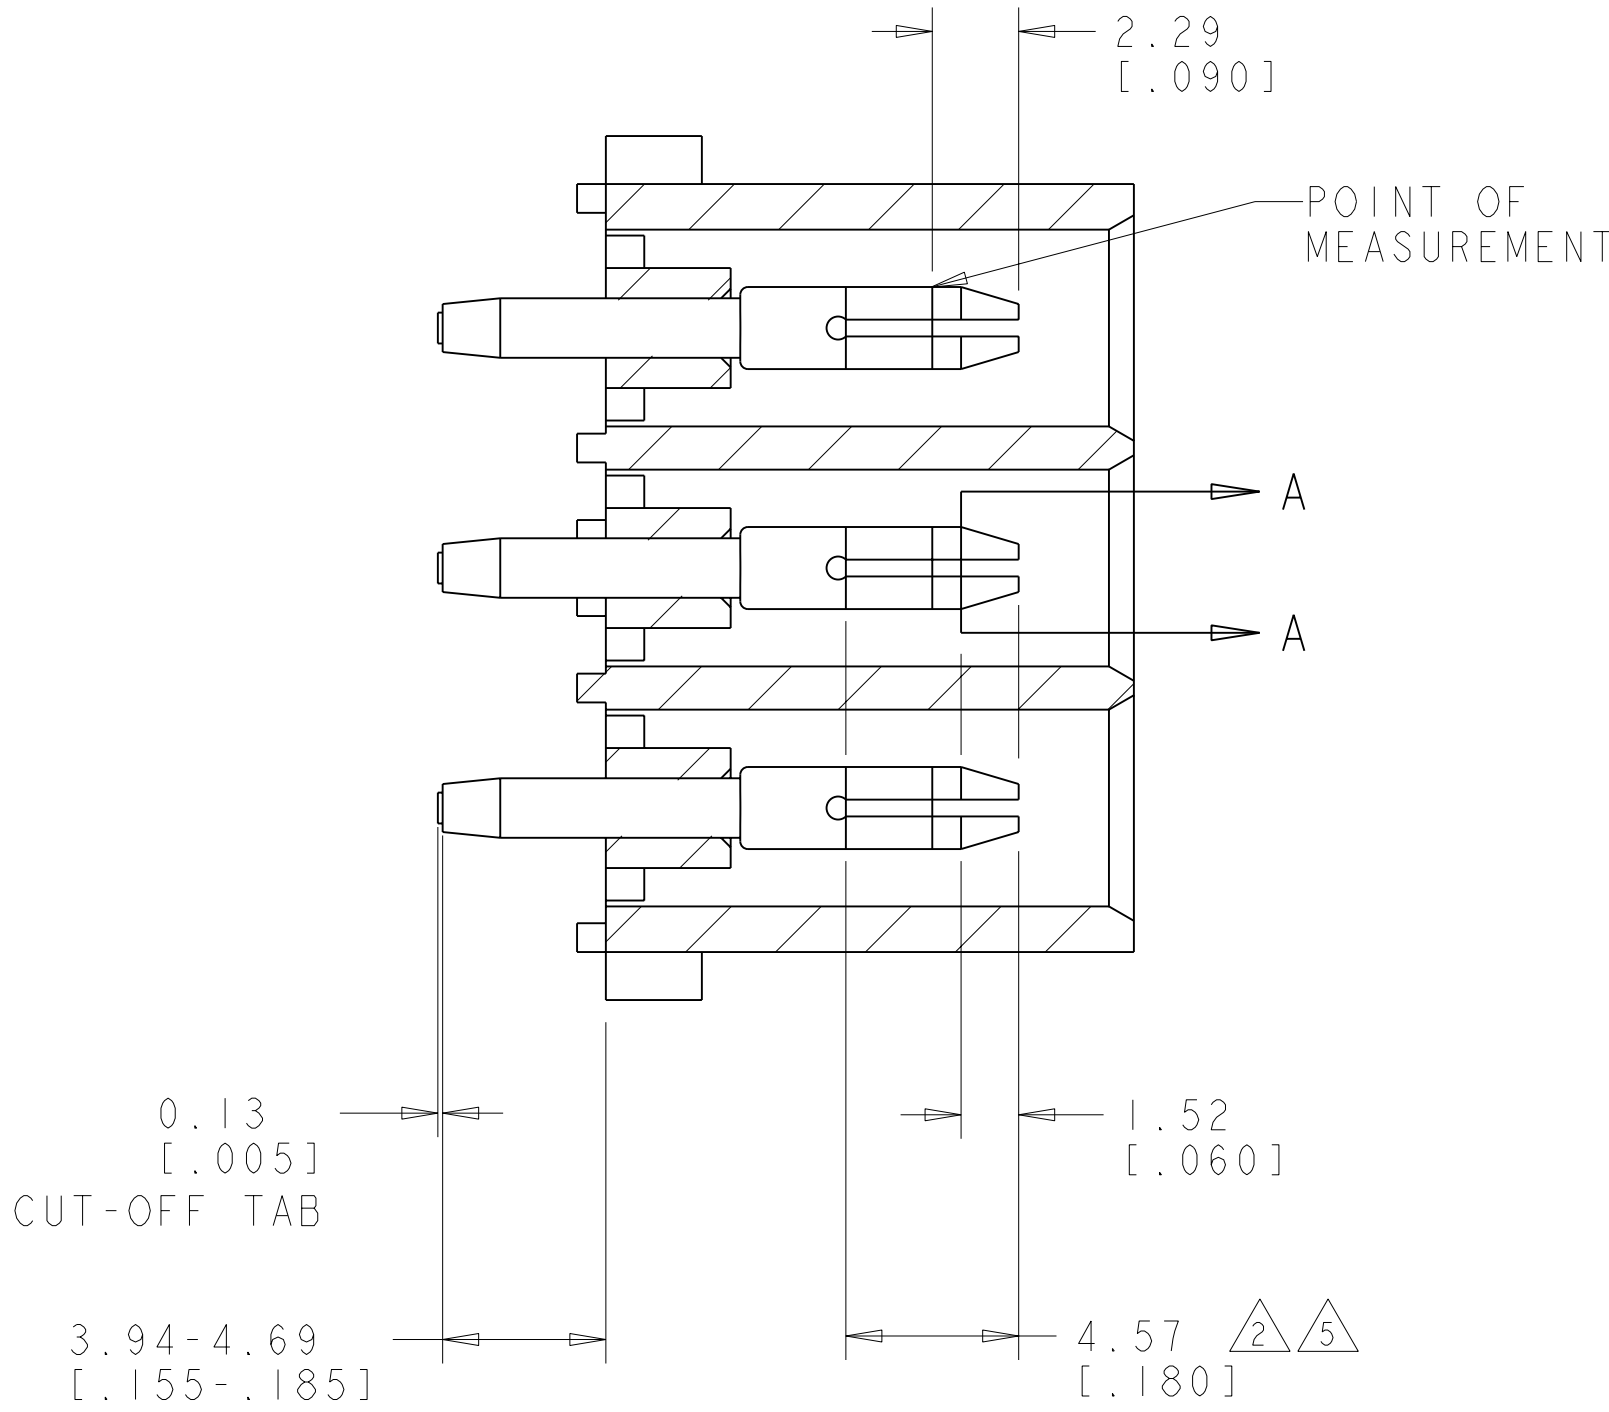


3 DIMENSIONAL MODEL
SCALE 4:1

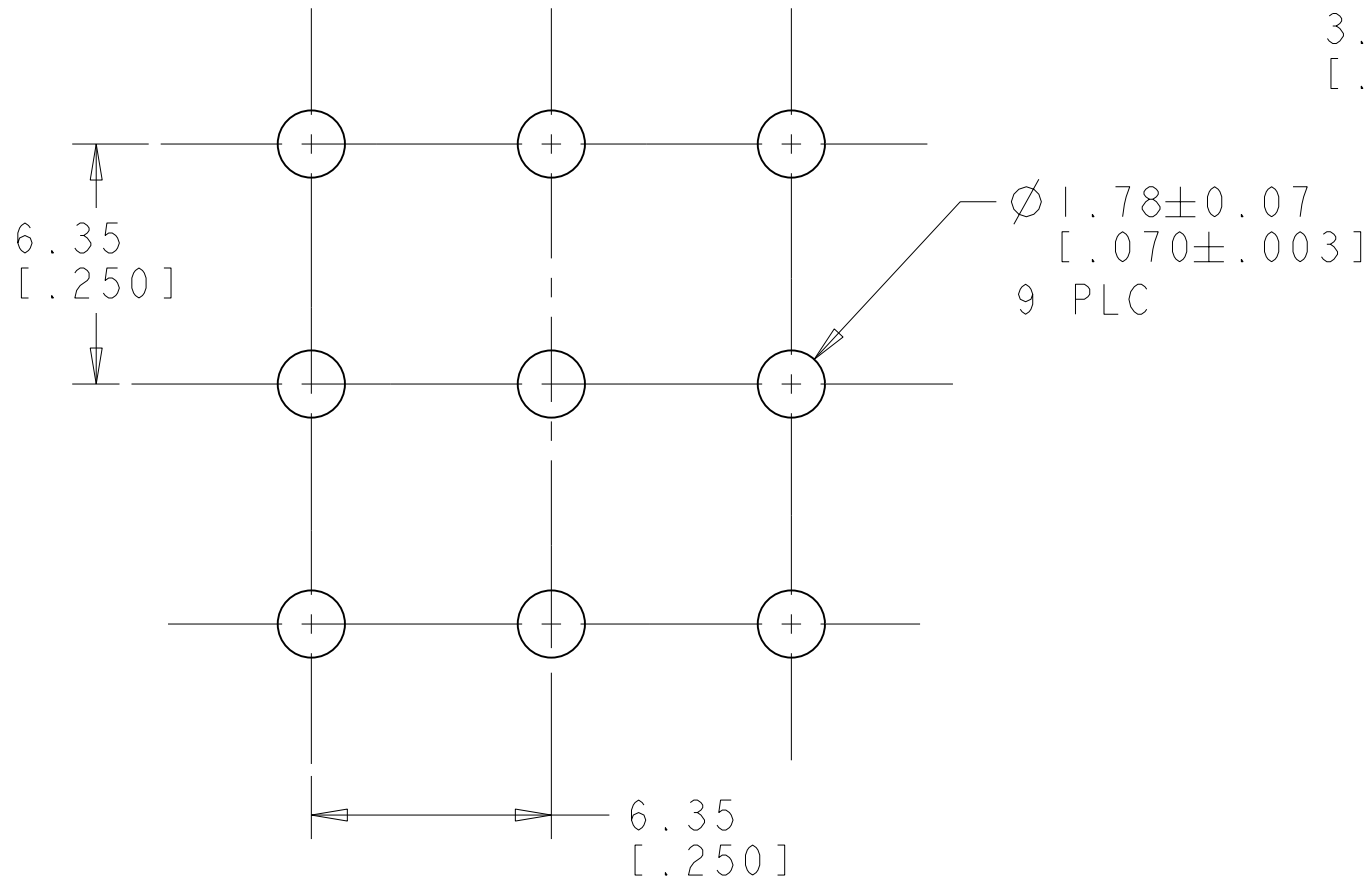

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPOR BRONZE, GOLD	NYLON, UL94V-0,NATURAL	350712-4
PHOSPOR BRONZE, GOLD	NYLON, UL94V-0,NATURAL	350712-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0,NATURAL	350712-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

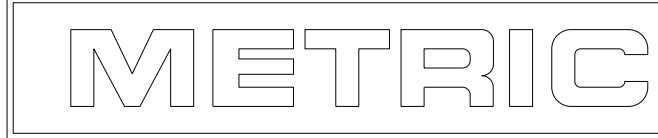

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN K. WHITAKER CHK S. RIDGILL APVD S. RIDGILL		Tyco Electronics Harrisburg, PA 17105-3608	
0 PLC ± 1 PLC ± 2 PLC ±0.13(.005) 3 PLC ± 4 PLC ±		ANGLES 40° 30°		25JULY2005		NAME	
MATERIAL SEE TABLE		FINISH SEE TABLE		PRODUCT SPEC		PIN HEADER ASSEMBLY, 9 CIRCUT, UNIVERSAL MATE-N-LOK(TM)	
WEIGHT		RESTRICTED TO		APPLICATION SPEC		SIZE	
CUSTOMER DRAWING		SCALE 1:1		CAGE CODE		DRAWING NO	
				00779		©=350712	
						SHEET 1 OF 1	
						REV R	