

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 854233

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
CM	00	W		ECO-05-015525	28MAR06

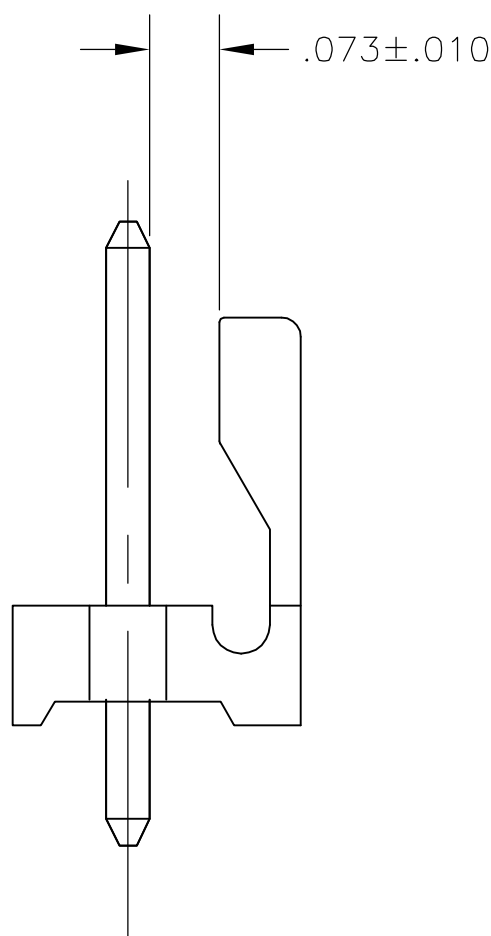
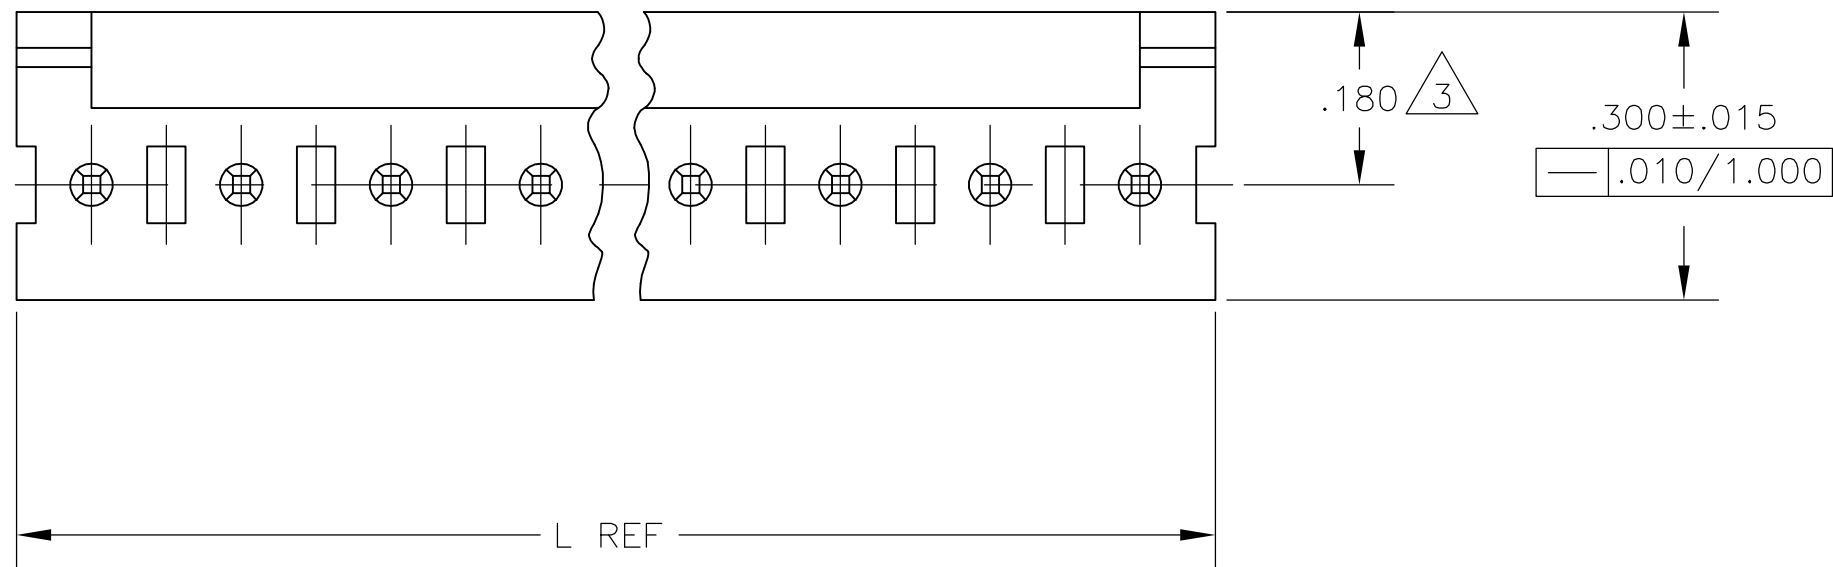


FIG 2



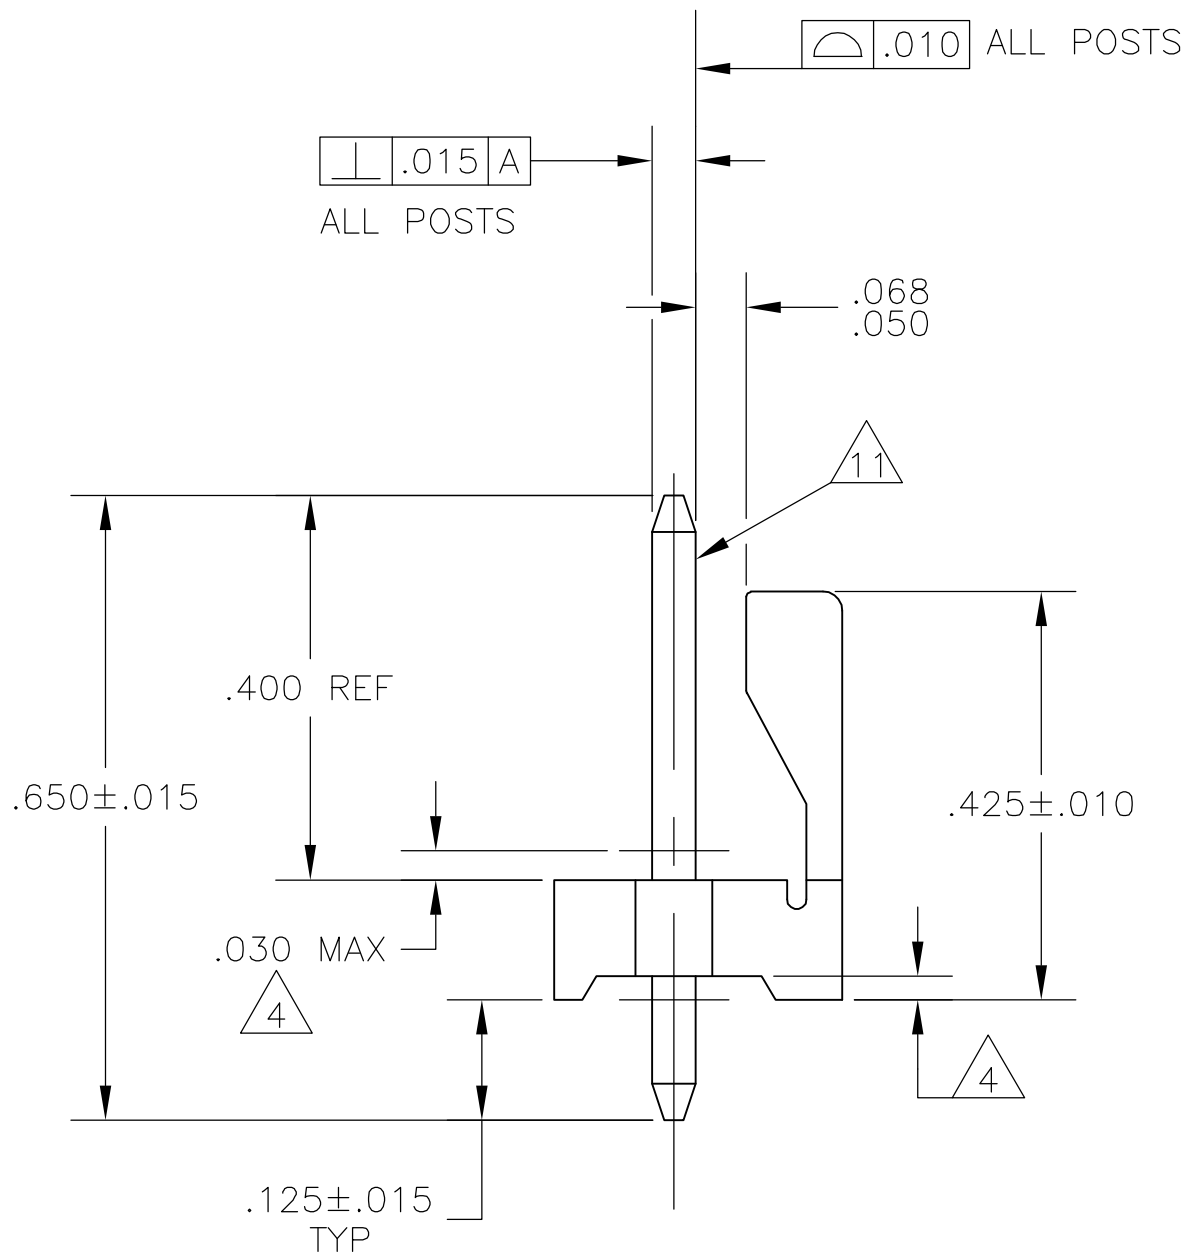


FIG 1

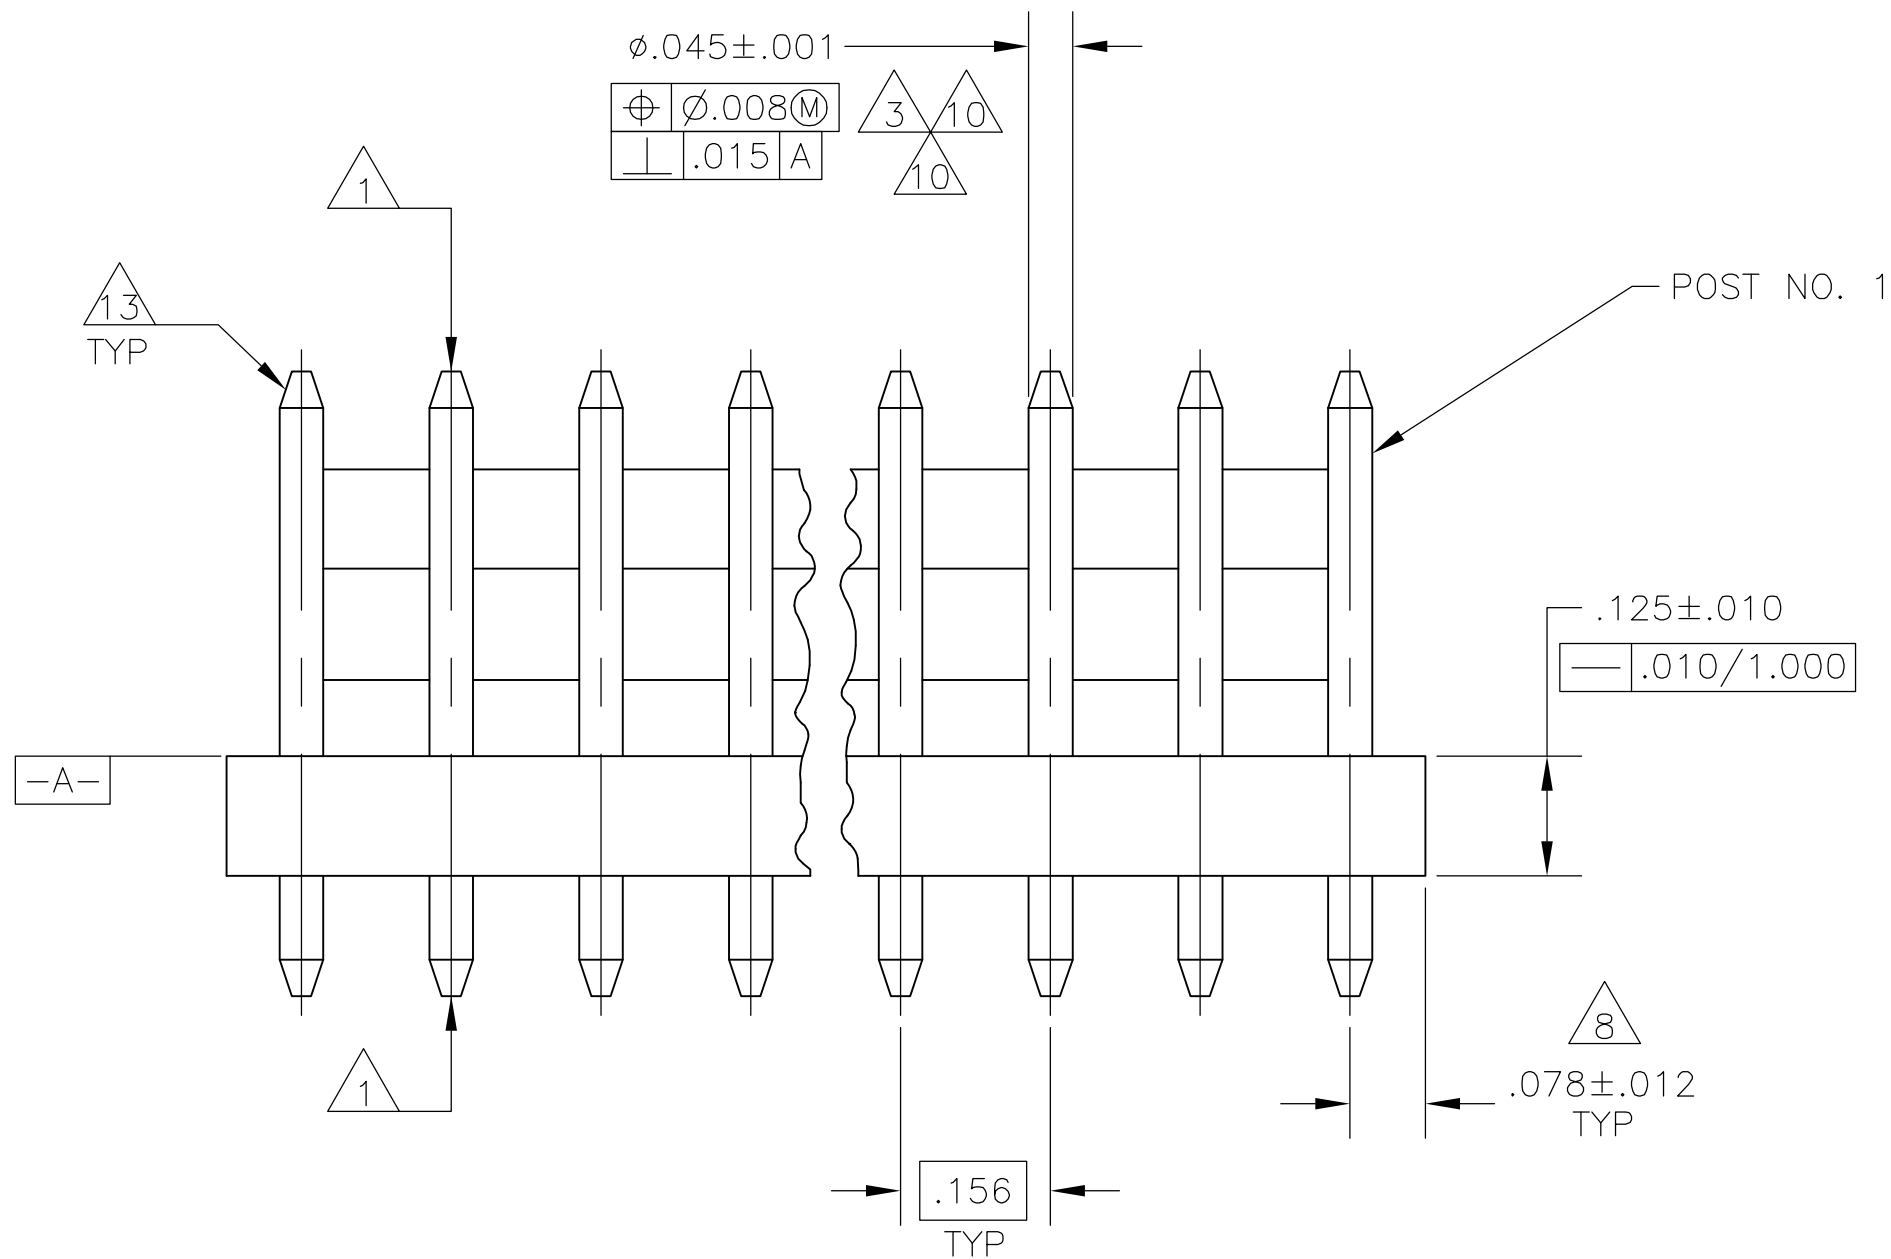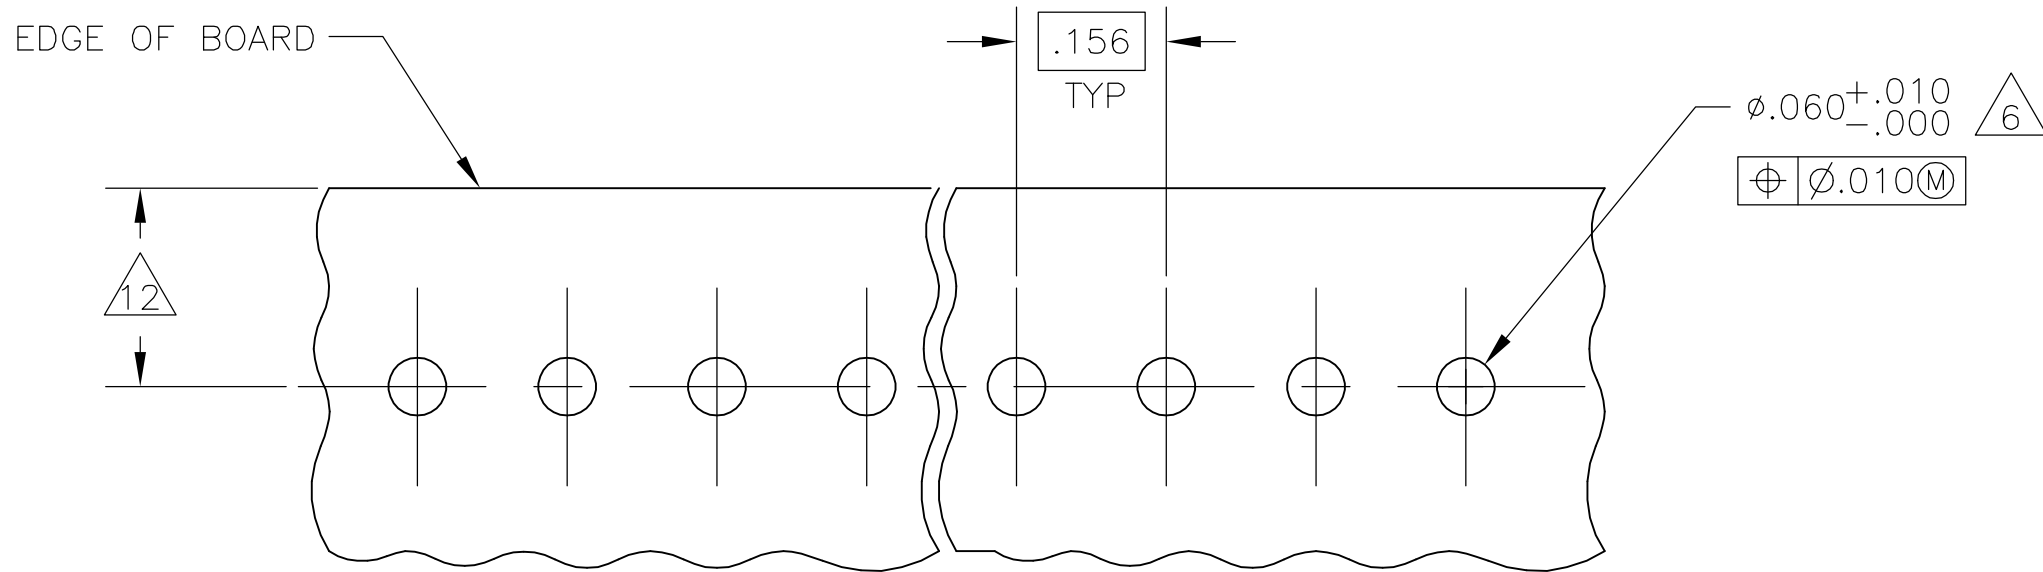

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD

.063	1.60		
.060	1.52	1.000	25.40
.051	1.30	.700	17.78
.046	1.17	.450	11.43
.045	1.14	.425	10.80
.030	0.76	.300	7.62
.015	0.38	.180	4.57
.012	0.30	.175	4.45
.010	0.25	.156	3.96
.008	0.20	.125	3.18
.005	0.13	.078	1.98
.003	0.08	.073	1.85
.001	0.03	.068	1.73
[IN]	MM	[IN]	MM

CONVERSION TABLE

- POST TO WITHSTAND 13 NEWTONS (3LBS.) MIN. AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- MEASURED AT SURFACE -A-
- PLASTIC FLASH PERMITTED IN THIS AREA.
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- ONE HOLE MAY BE UNDERSIZED (.051/.046 DIA.) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- MATERIAL : HEADER-THERMOPLASTIC POLYESTER GLASS-FILLED 94V-O(NATURAL)(FIG.2) POST-COPPER ALLOY (TIN PLATED)

MATERIAL : HEADER-THERMOPLASTIC POLYESTER NON-FILLED 94V-O(NATURAL)(FIG.1) POST-COPPER ALLOY (TIN PLATED)
- COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- POST TO BE MEASURED WHEN STRIP IS HELD FLAT.
- POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- DIMENSION SHOULD BE .175 MIN WHEN MATING WITH A MTA 156 CONNECTOR ASSEMBLY OR A SL-156 CONNECTOR ASSEMBLY.
- PIN BURR OF .005 MAX. VERTICAL AND .003 MAX. HORIZONTAL PERMITTED AT POST TIPS ON BOTH ENDS.

2	95.10	3.744	24	2-640388-4
2	91.14	3.588	23	2-640388-3
2	87.17	3.432	22	2-640388-2
2	83.21	3.276	21	2-640388-1
2	79.25	3.120	20	2-640388-0
2	75.29	2.964	19	1-640388-9
2	71.32	2.808	18	1-640388-8
2	67.36	2.652	17	1-640388-7
2	63.40	2.496	16	1-640388-6
2	59.44	2.340	15	1-640388-5
2	55.47	2.184	14	1-640388-4
2	51.51	2.028	13	1-640388-3
2	47.55	1.872	12	1-640388-2
2	43.59	1.716	11	1-640388-1
2	39.62	1.560	10	1-640388-0
2	35.66	1.404	9	640388-9
1	31.70	1.248	8	640388-8
1	27.74	1.092	7	640388-7
1	23.77	.936	6	640388-6
1	19.81	.780	5	640388-5
1	15.85	.624	4	640388-4
1	11.89	.468	3	640388-3
1	7.92	.312	2	640388-2

FIG NO.	MM	[IN]	NUMBER OF POSITIONS	PART NUMBER
1	27.74	1.092	7	640388-7
2	31.70	1.248	8	640388-8
3	35.66	1.404	9	640388-9
4	39.62	1.560	10	1-640388-0
5	43.59	1.716	11	1-640388-1
6	47.55	1.872	12	1-640388-2
7	51.51	2.028	13	1-640388-3
8	55.47	2.184	14	1-640388-4
9	59.44	2.340	15	1-640388-5
10	63.40	2.496	16	1-640388-6
11	67.36	2.652	17	1-640388-7
12	71.32	2.808	18	1-640388-8
13	75.29	2.964	19	1-640388-9
14	79.25	3.120	20	2-640388-0
15	83.21	3.276	21	2-640388-1
16	87.17	3.432	22	2-640388-2
17	91.14	3.588	23	2-640388-3
18	95.10	3.744	24	2-640388-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER	05NOV02	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK D. BOSSI	05NOV02	Harriaburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI	05NOV02	NAME	
0 PLC ± -		PRODUCT SPEC		MTA-.156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT .045 ROUND POST, TIN PLATED	
1 PLC ± -		APPLICATION SPEC		SIZE	
2 PLC ± -		WEIGHT		CAGE CODE	
3 PLC ± .005		CUSTOMER DRAWING		DRAWING NO	
4 PLC ± -		SCALE		REV	
ANGLES ± -		SHEET		1 OF 1	
FINISH		5:1		REV	

METRIC