

Distributed by:






JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 857717


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
CM	00	D	REV	PER EC OG1B-1094-04	21APR05	KW

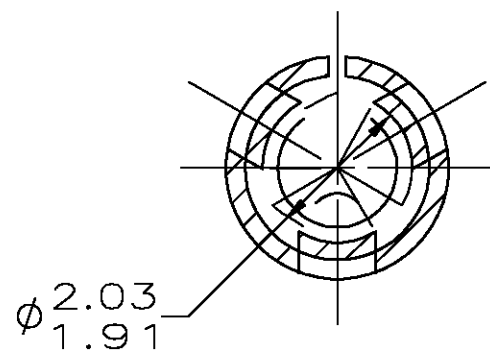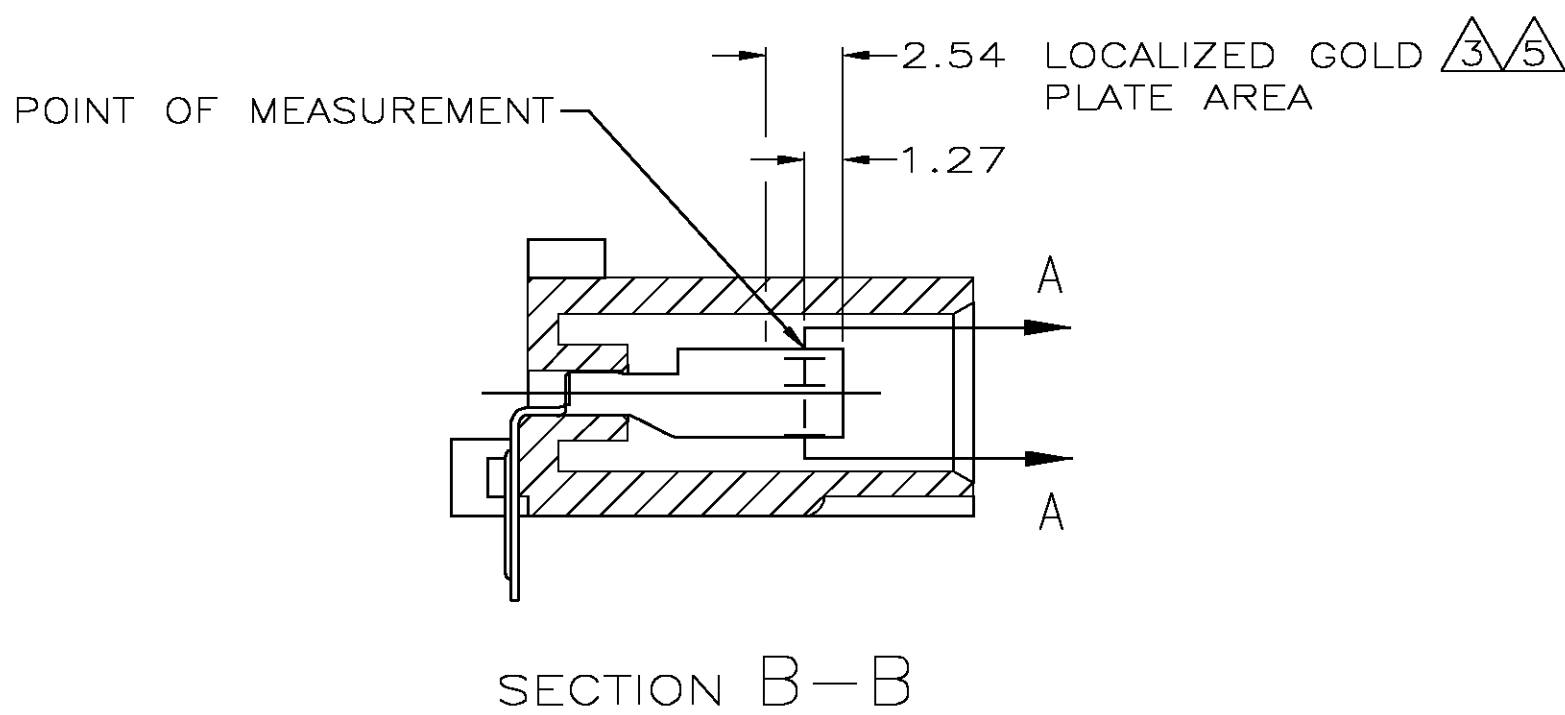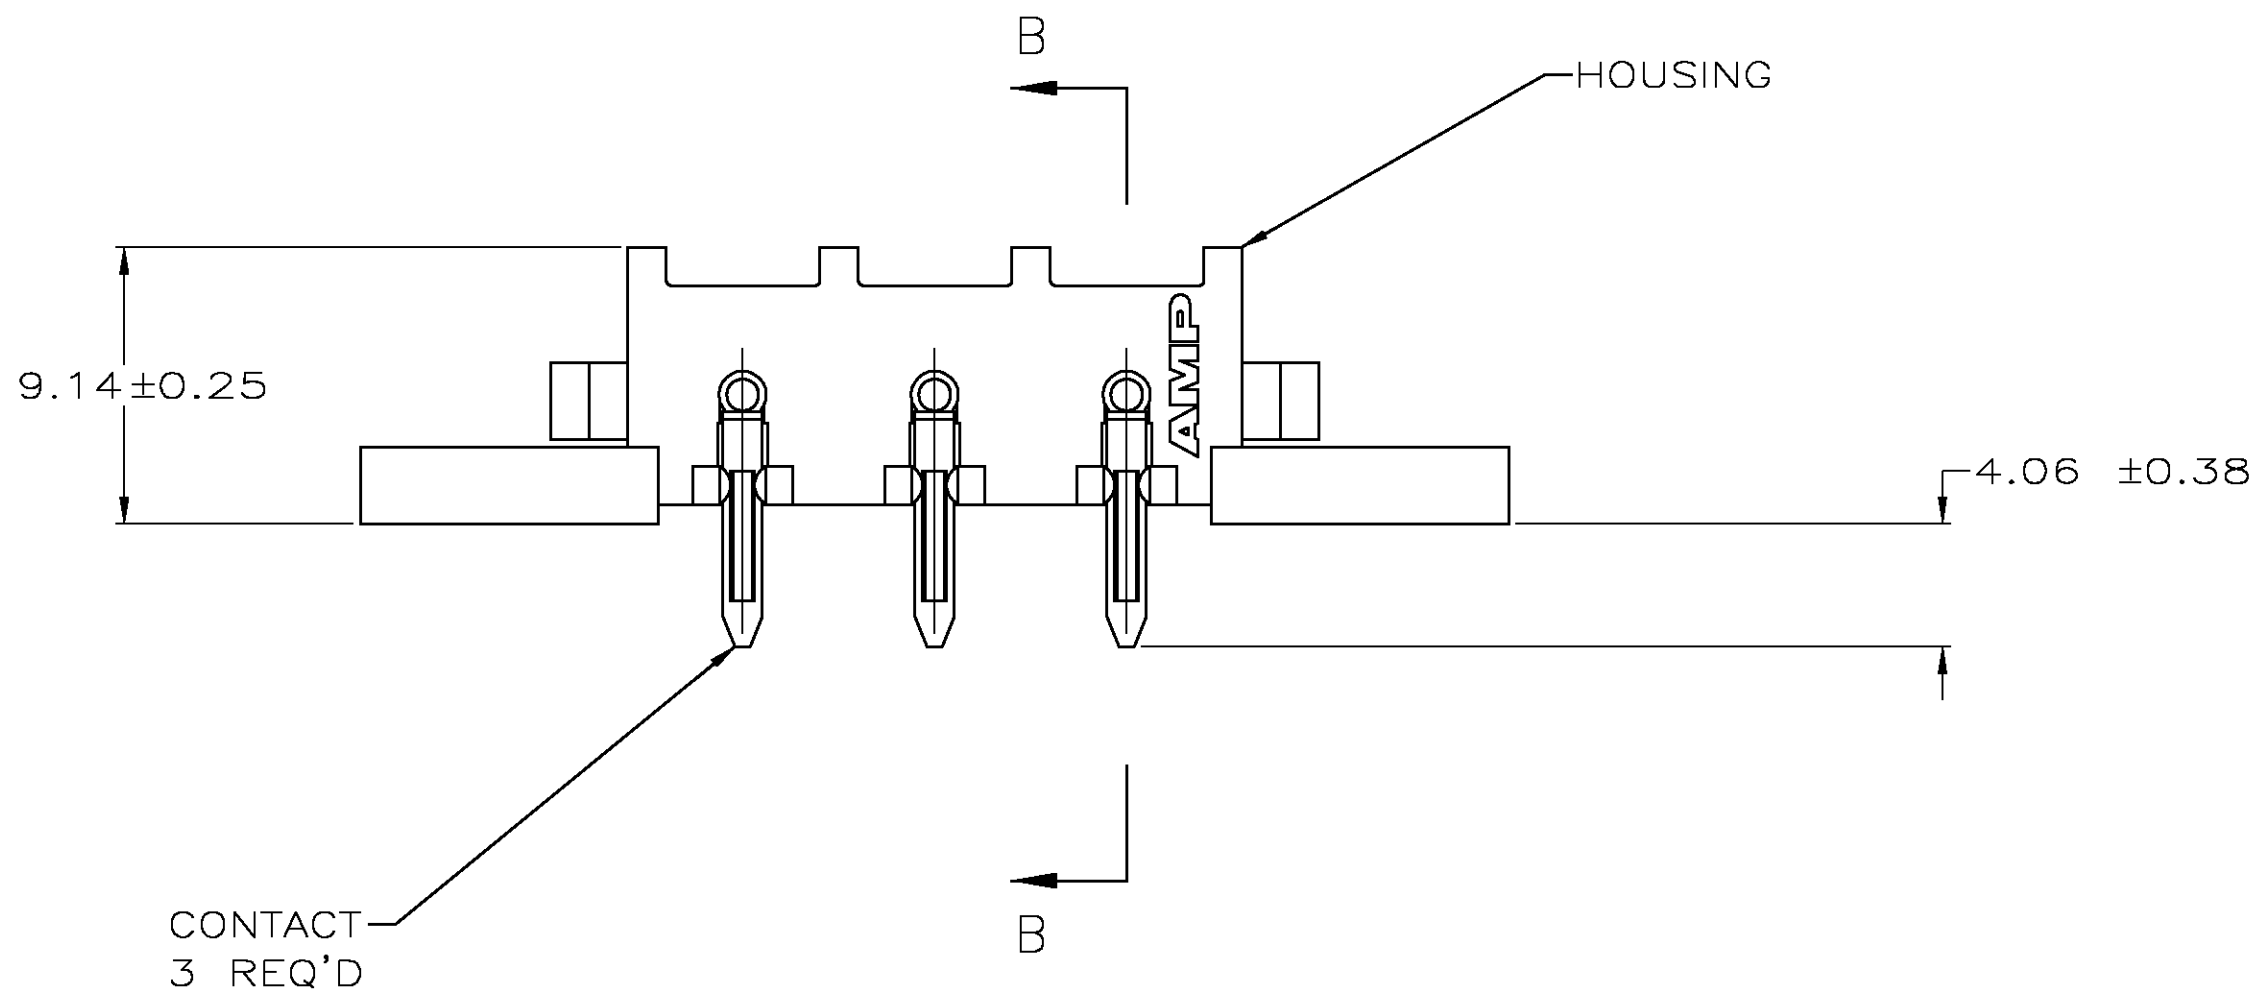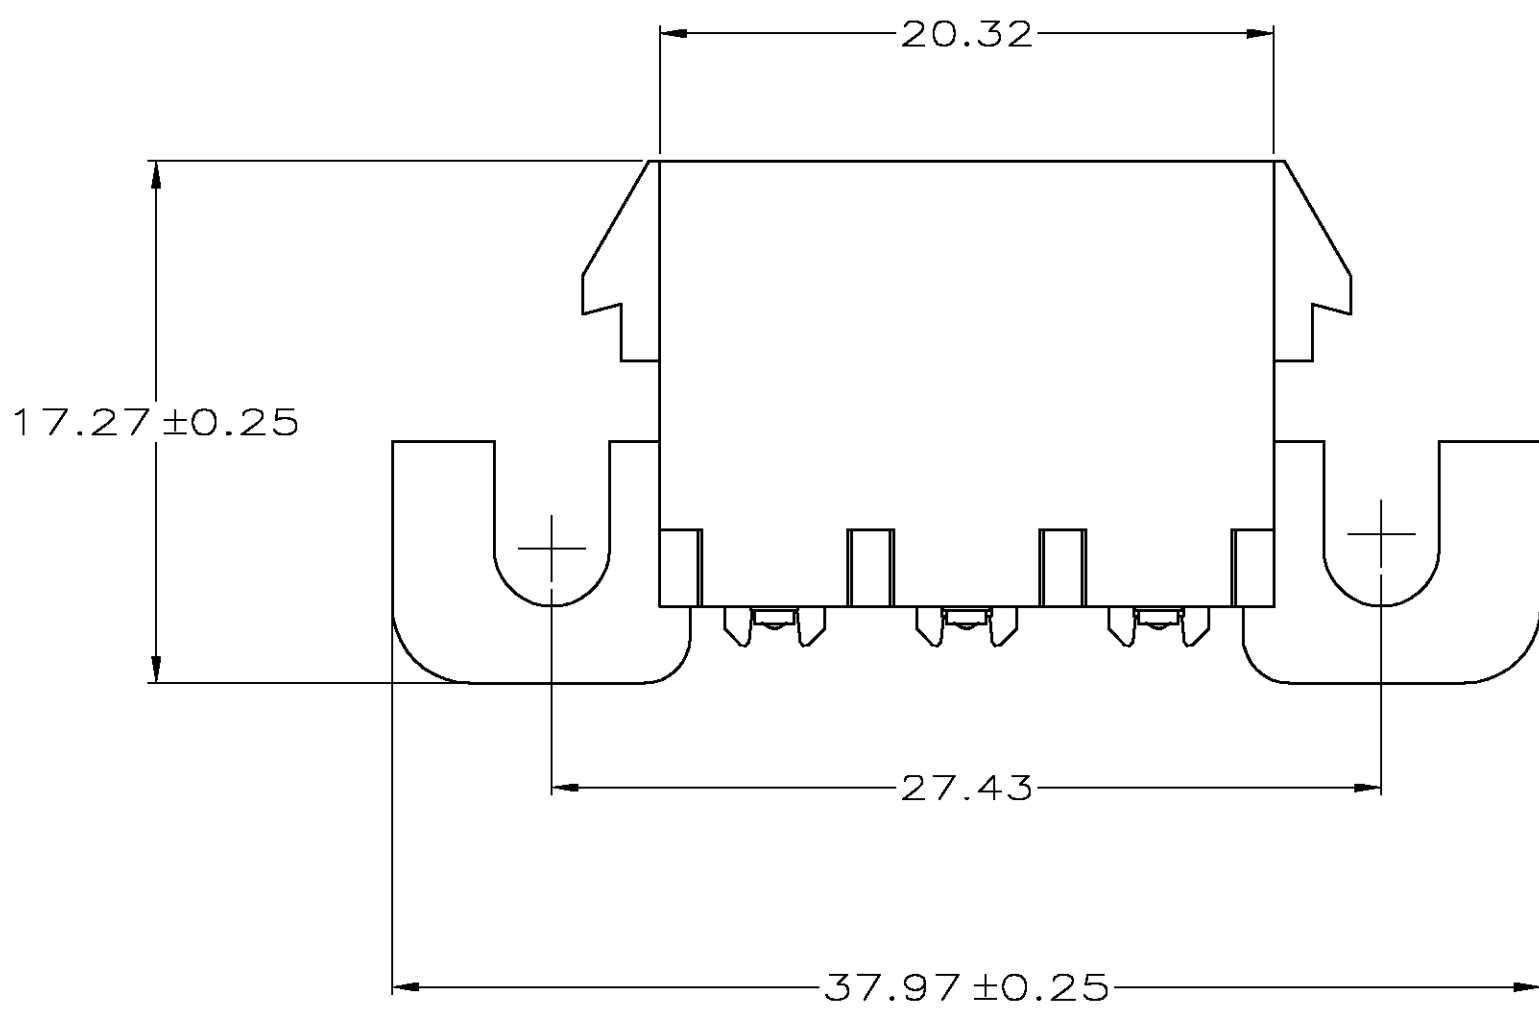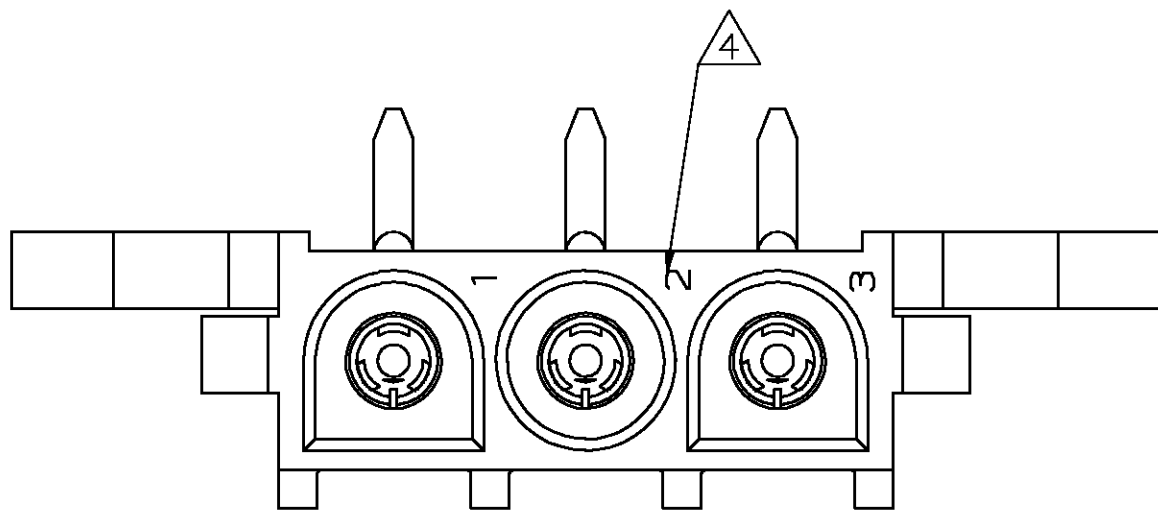

SECTION A-A
SCALE 10:1

2.54	.100		
2.03	.080	37.97	1.495
1.91	.075	27.43	1.080
1.57	.062	20.32	.800
1.52	.060	17.27	.680
1.27	.050	12.83	.505
0.38	.015	12.70	.500
0.25	.010	9.14	.360
0.13	.005	7.37	.290
0.08	.003	6.35	.250
0.00127	.000050	4.06	.160
0.00076	.000030	3.81	.150
MM	IN	MM	IN

CONVERSION TABLE

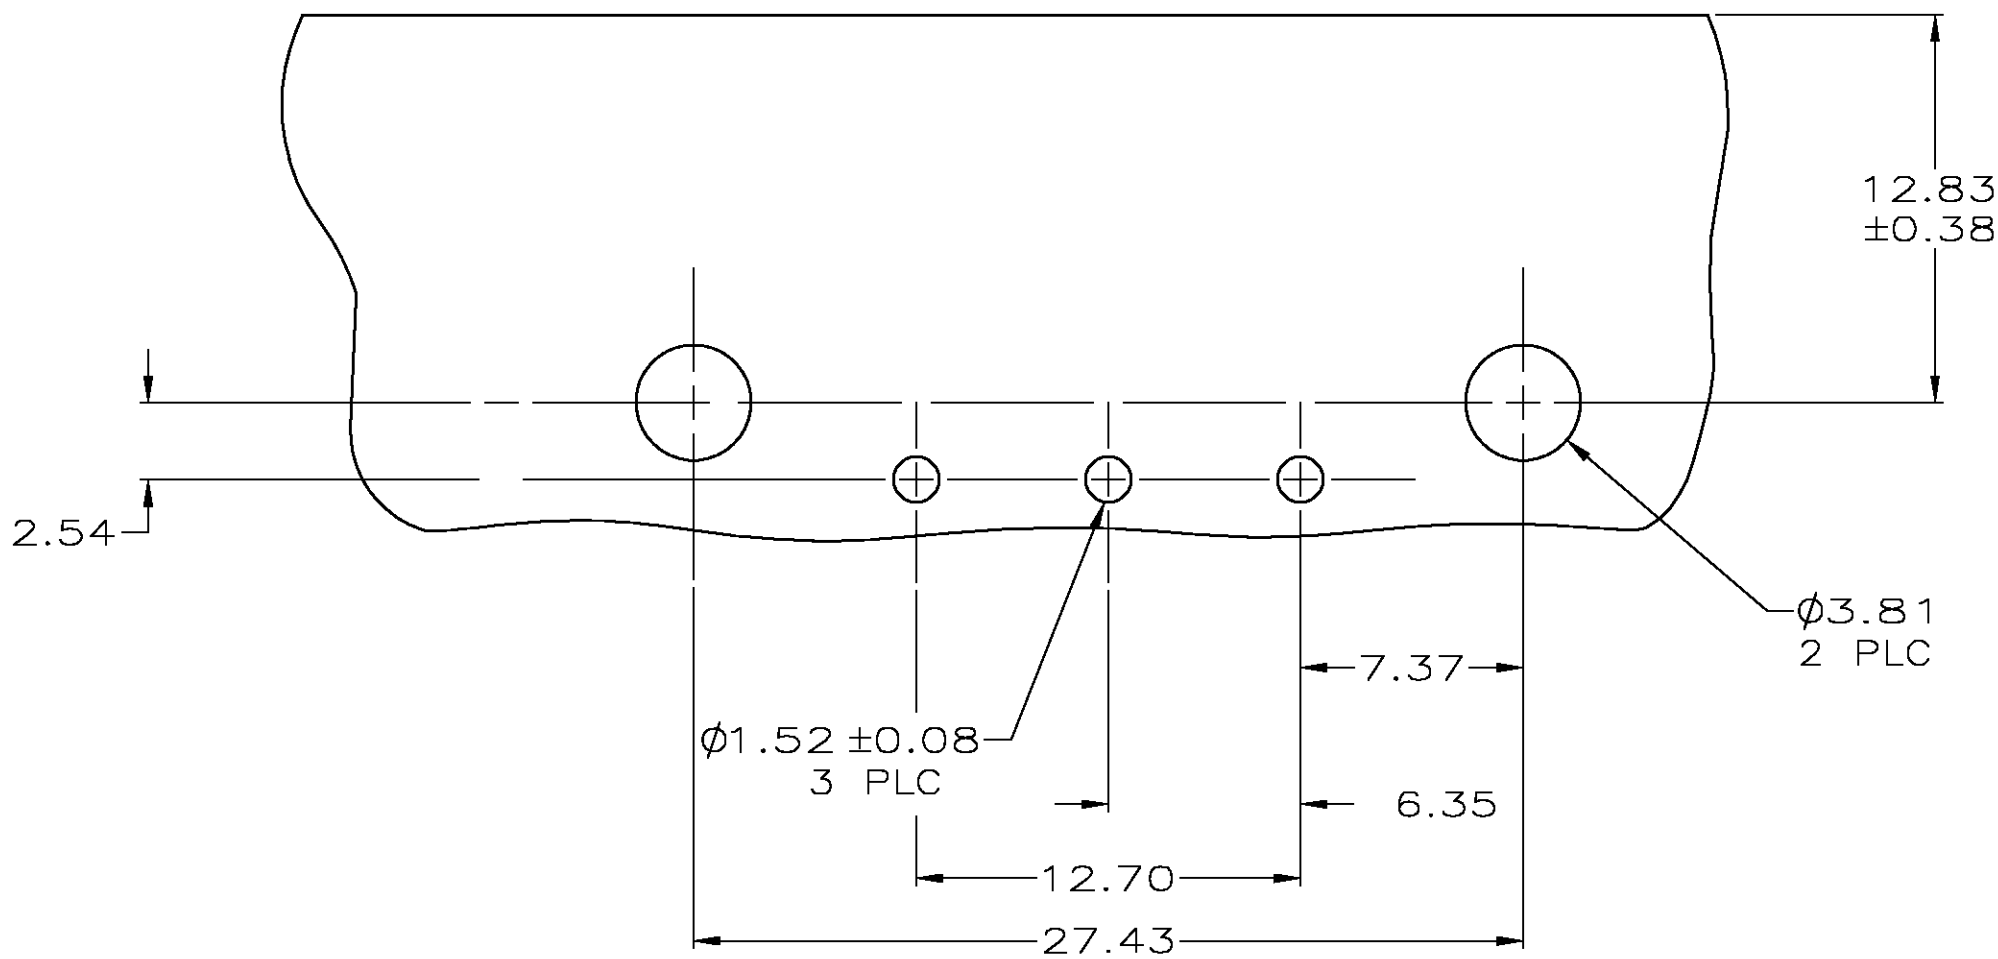

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

METRIC

1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.

0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN LEAD ON SOLDER TAIL.

CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN ON SOLDER TAIL.

PH BRZ, Δ	NYLON UL 94V-0	3-643228-0
PH BRZ, Δ	NYLON UL 94V-0	643228-2
PH BRZ,TIN	NYLON UL 94V-0	643228-1
CONTACT	HOUSING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 21APR2005	 Tyco Electronics Corporation Harriaburg, Pa 17105-3608		
DIMENSIONS: mm		CHK S. RIDGILL 21APR2005	NAME S. RIDGILL 21APR2005 SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT,3 POSITION, UNIVERSAL MATE-N-LOK(TM)		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC APPLICATION SPEC WEIGHT			
MATERIAL SEE TABLE		SIZE A1 00779 C=643228			
FINISH SEE TABLE		RESTRICTED TO D			