


Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.




Jameco Part Number 880538

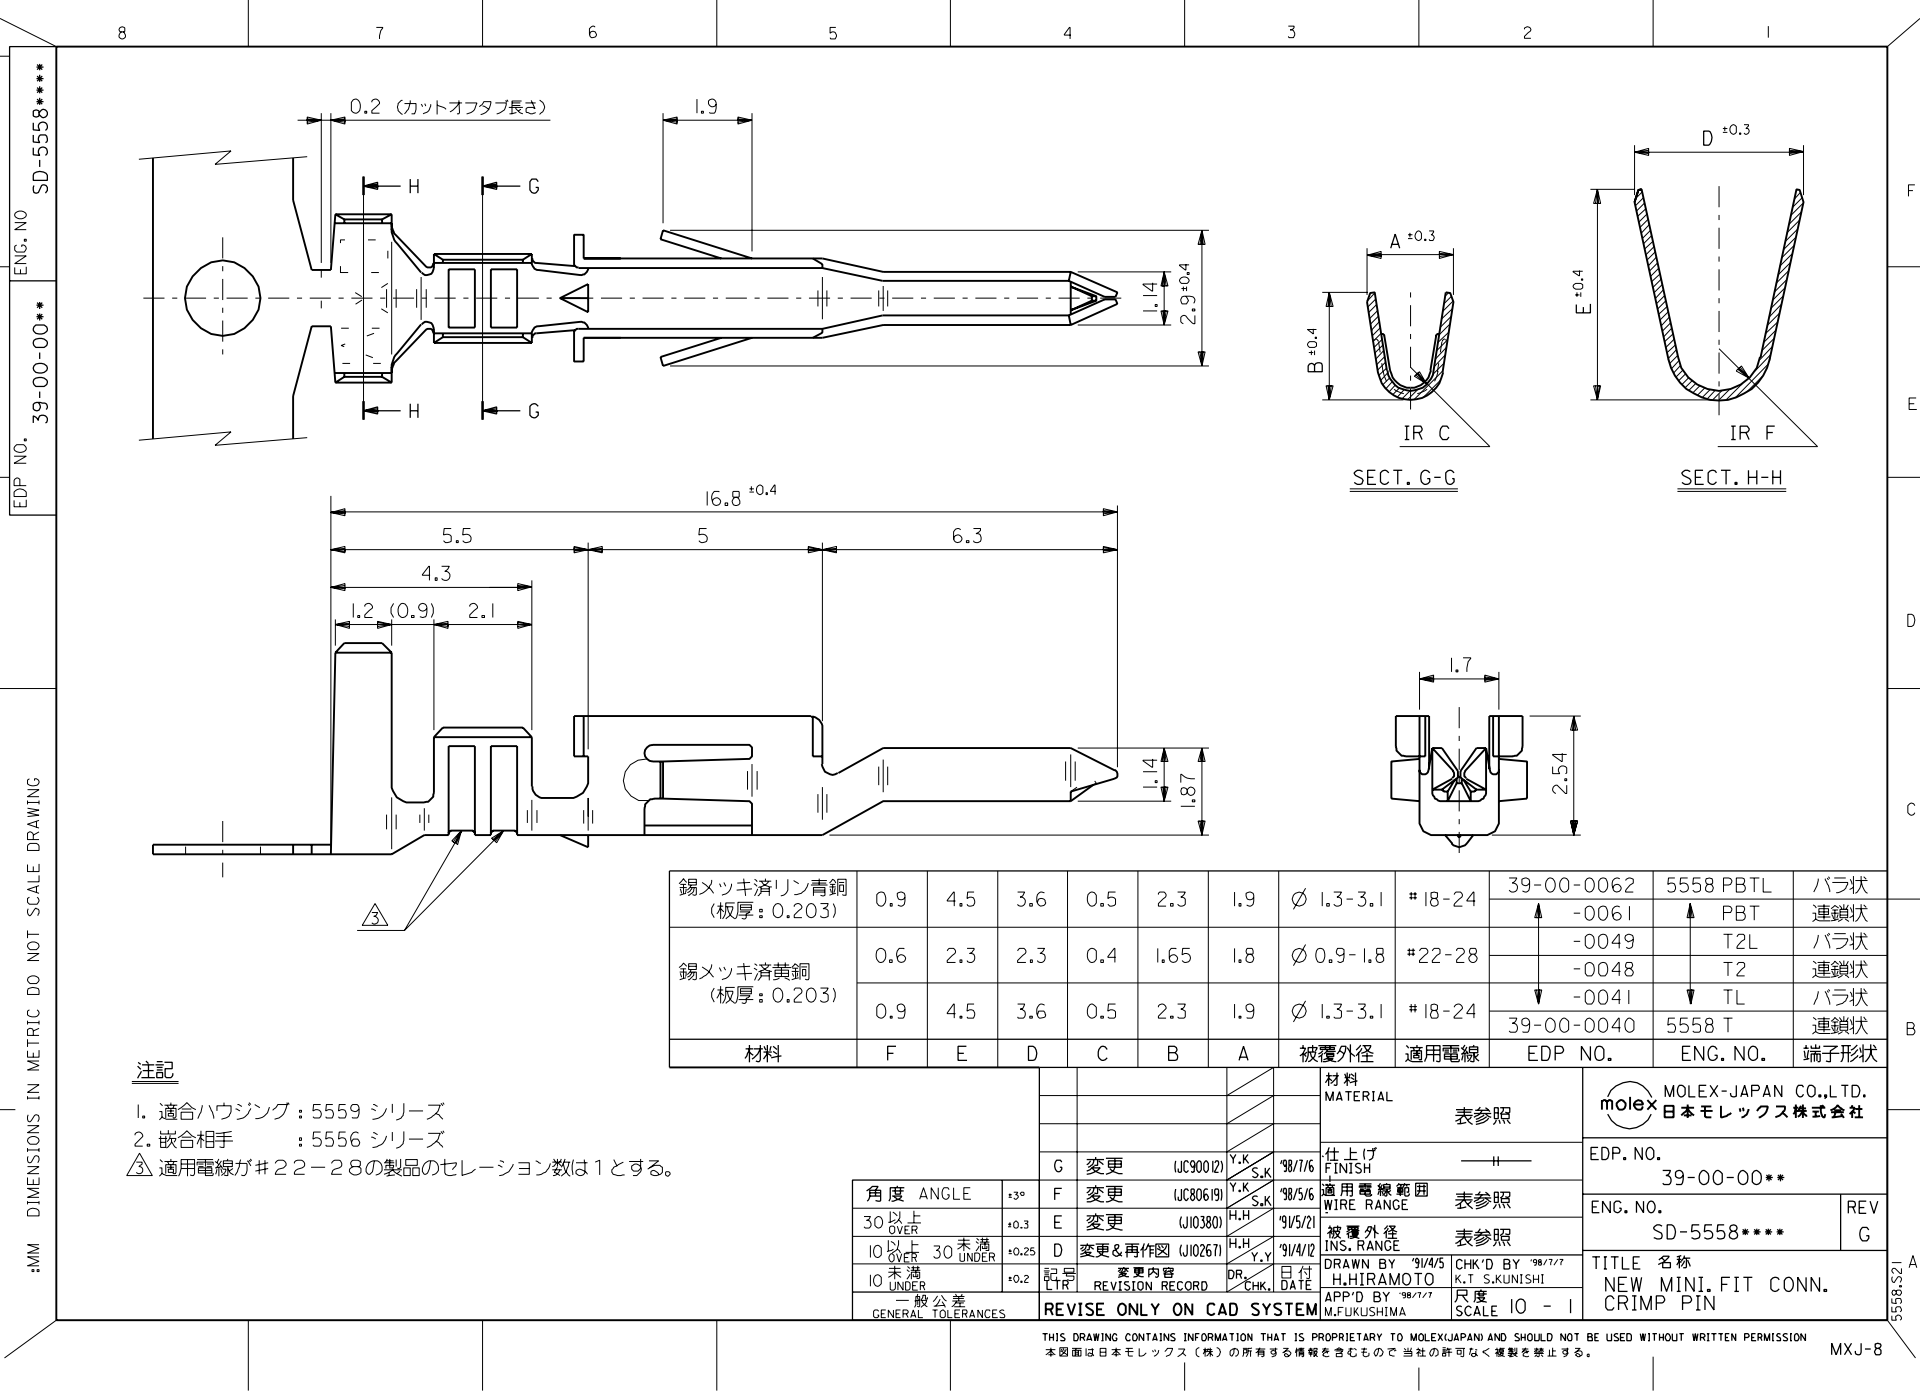

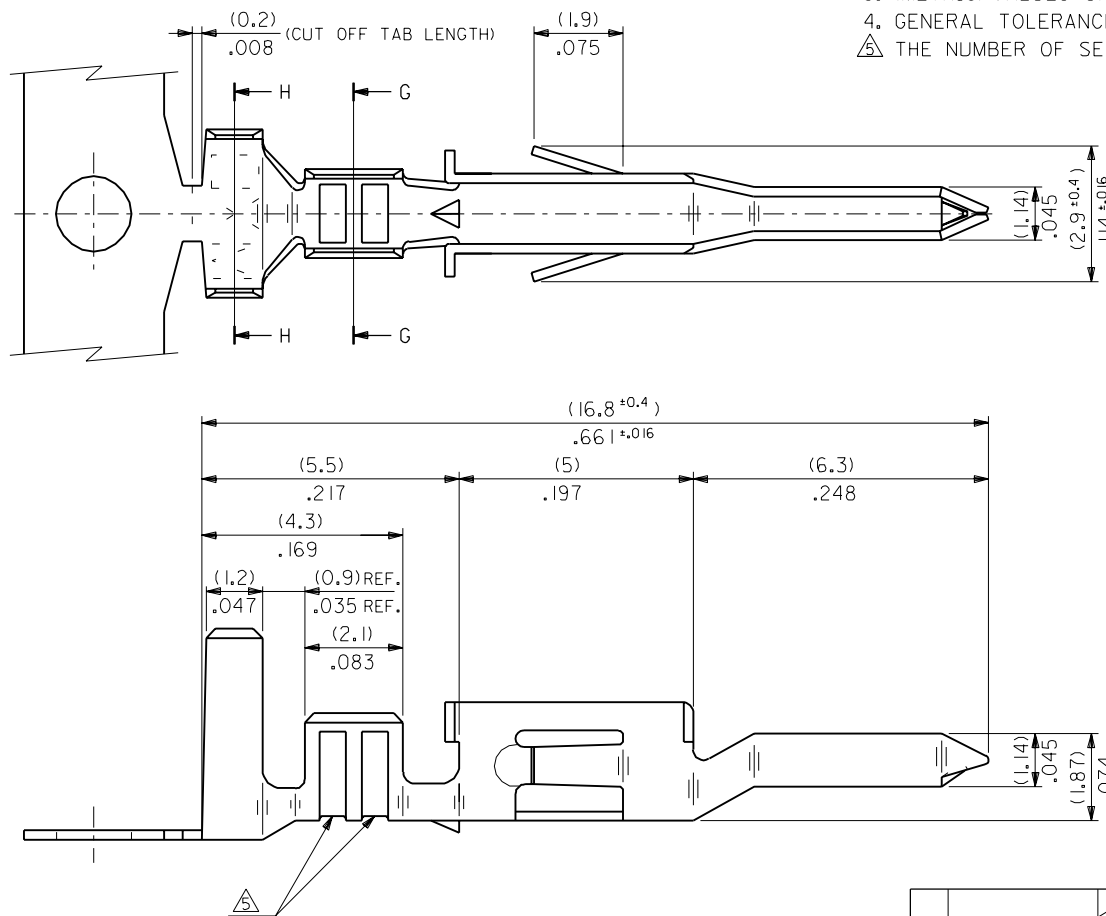

NOTES

1. APPLICABLE HOUSING : 5559 SERIES
2. MATES WITH TERMINAL : 5556 SERIES
3. (METRIC) VALUES SHOWN GOVERN OVER ENGLISH CONVERSION VALUES.
4. GENERAL TOLERANCES OF ENGLISH CONVERSION VALUES : ±.008 INCH
5. THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.

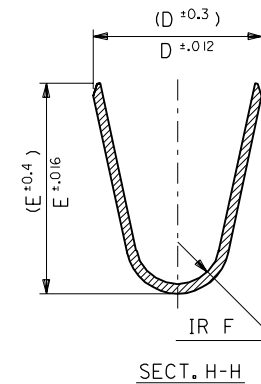

						材料 MATERIAL		SEE SHEET 2 OF 2		MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
						仕上げ FINISH		SEE SHEET 2 OF 2		EDP. NO.	
						適用電線範囲 WIRE RANGE		SEE SHEET 2 OF 2		SEE SHEET 2 OF 2	
角度 ANGLE		±3°				被覆外径 INS. RANGE		SEE SHEET 2 OF 2		ENG. NO. SHEET 1 OF 2 REV	
30 以上 OVER		+0.3		G REVISED (J10381)		Y.Y.		91/6/25		SD-5558**** K	
10 以上 30 未満 OVER UNDER		+0.5		F REVISED & REDRAWN (J10202)		Y.Y.		91/4/27			
10 未満 UNDER		+0.2		記号 LTR 変更内容 REVISION RECORD		DR. CHK. 日付 DATE		DRAWN BY 91/3/2 H.HIRAMOTO		CHK'D BY 98/7/7 K.T. S.KUNISHI	
GENERAL TOLERANCES				REVISE ONLY ON CAD SYSTEM				APP'D BY 98/7/7 M.FUKUSHIMA		TITLE 名称 NEW MINI. FIT CONN. CRIMP PIN	
								尺度 SCALE 10 - 1			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので当社の許可なく複製を禁止する。

MXJ-8

ENG. NO
SD-5558*****

EDP NO.
SEE CHART

MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

SHEET 2 OF 2

TIN PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	39-00-0084	5558 PBT3L	LOOSE
									↑ -0083	↑ PBT3	CHAIN
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0068	PBT2L	LOOSE
									-0067	PBT2	CHAIN
TIN OVER COPPER PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0062	PBTL	LOOSE
									-0061	PBT	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0082	T3L	LOOSE
									-0081	T3	CHAIN
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0049	T2L	LOOSE
									-0048	T2	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	↓ -0041	↓ TL	LOOSE
									39-00-0040	5558 T	CHAIN
MATERIAL	F	E	D	C	B	A	INS. RANGE	WIRE RANGE	EDP NO.	ENG. NO.	FORM

								材料 MATERIAL	SEE CHART	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
								THICKNESS : (0.203)/.008		
								仕上げ FINISH	SEE CHART	EDP. NO.
								適用電線範囲 WIRE RANGE	SEE CHART	SEE CHART
								被覆外径 INS. RANGE	SEE CHART	ENG. NO.
								DRAWN BY 9/13/2 H.HIRAMOTO	CHK'D BY 98/7/7 K.T. S.KUNISHI	SHEET 2 OF 2
								APP'D BY 98/7/7 M.FUKUSHIMA	尺度 SCALE 10 - 1	REV
								TITLE 名称 NEW MINI. FIT CONN. CRIMP PIN		

角度	ANGLE	°30
30 以上 OVER		+0.3
10 以上 30 未満 OVER UNDER		+0.25
10 未満 UNDER		+0.2
一般公差 GENERAL TOLERANCES		