


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 900201

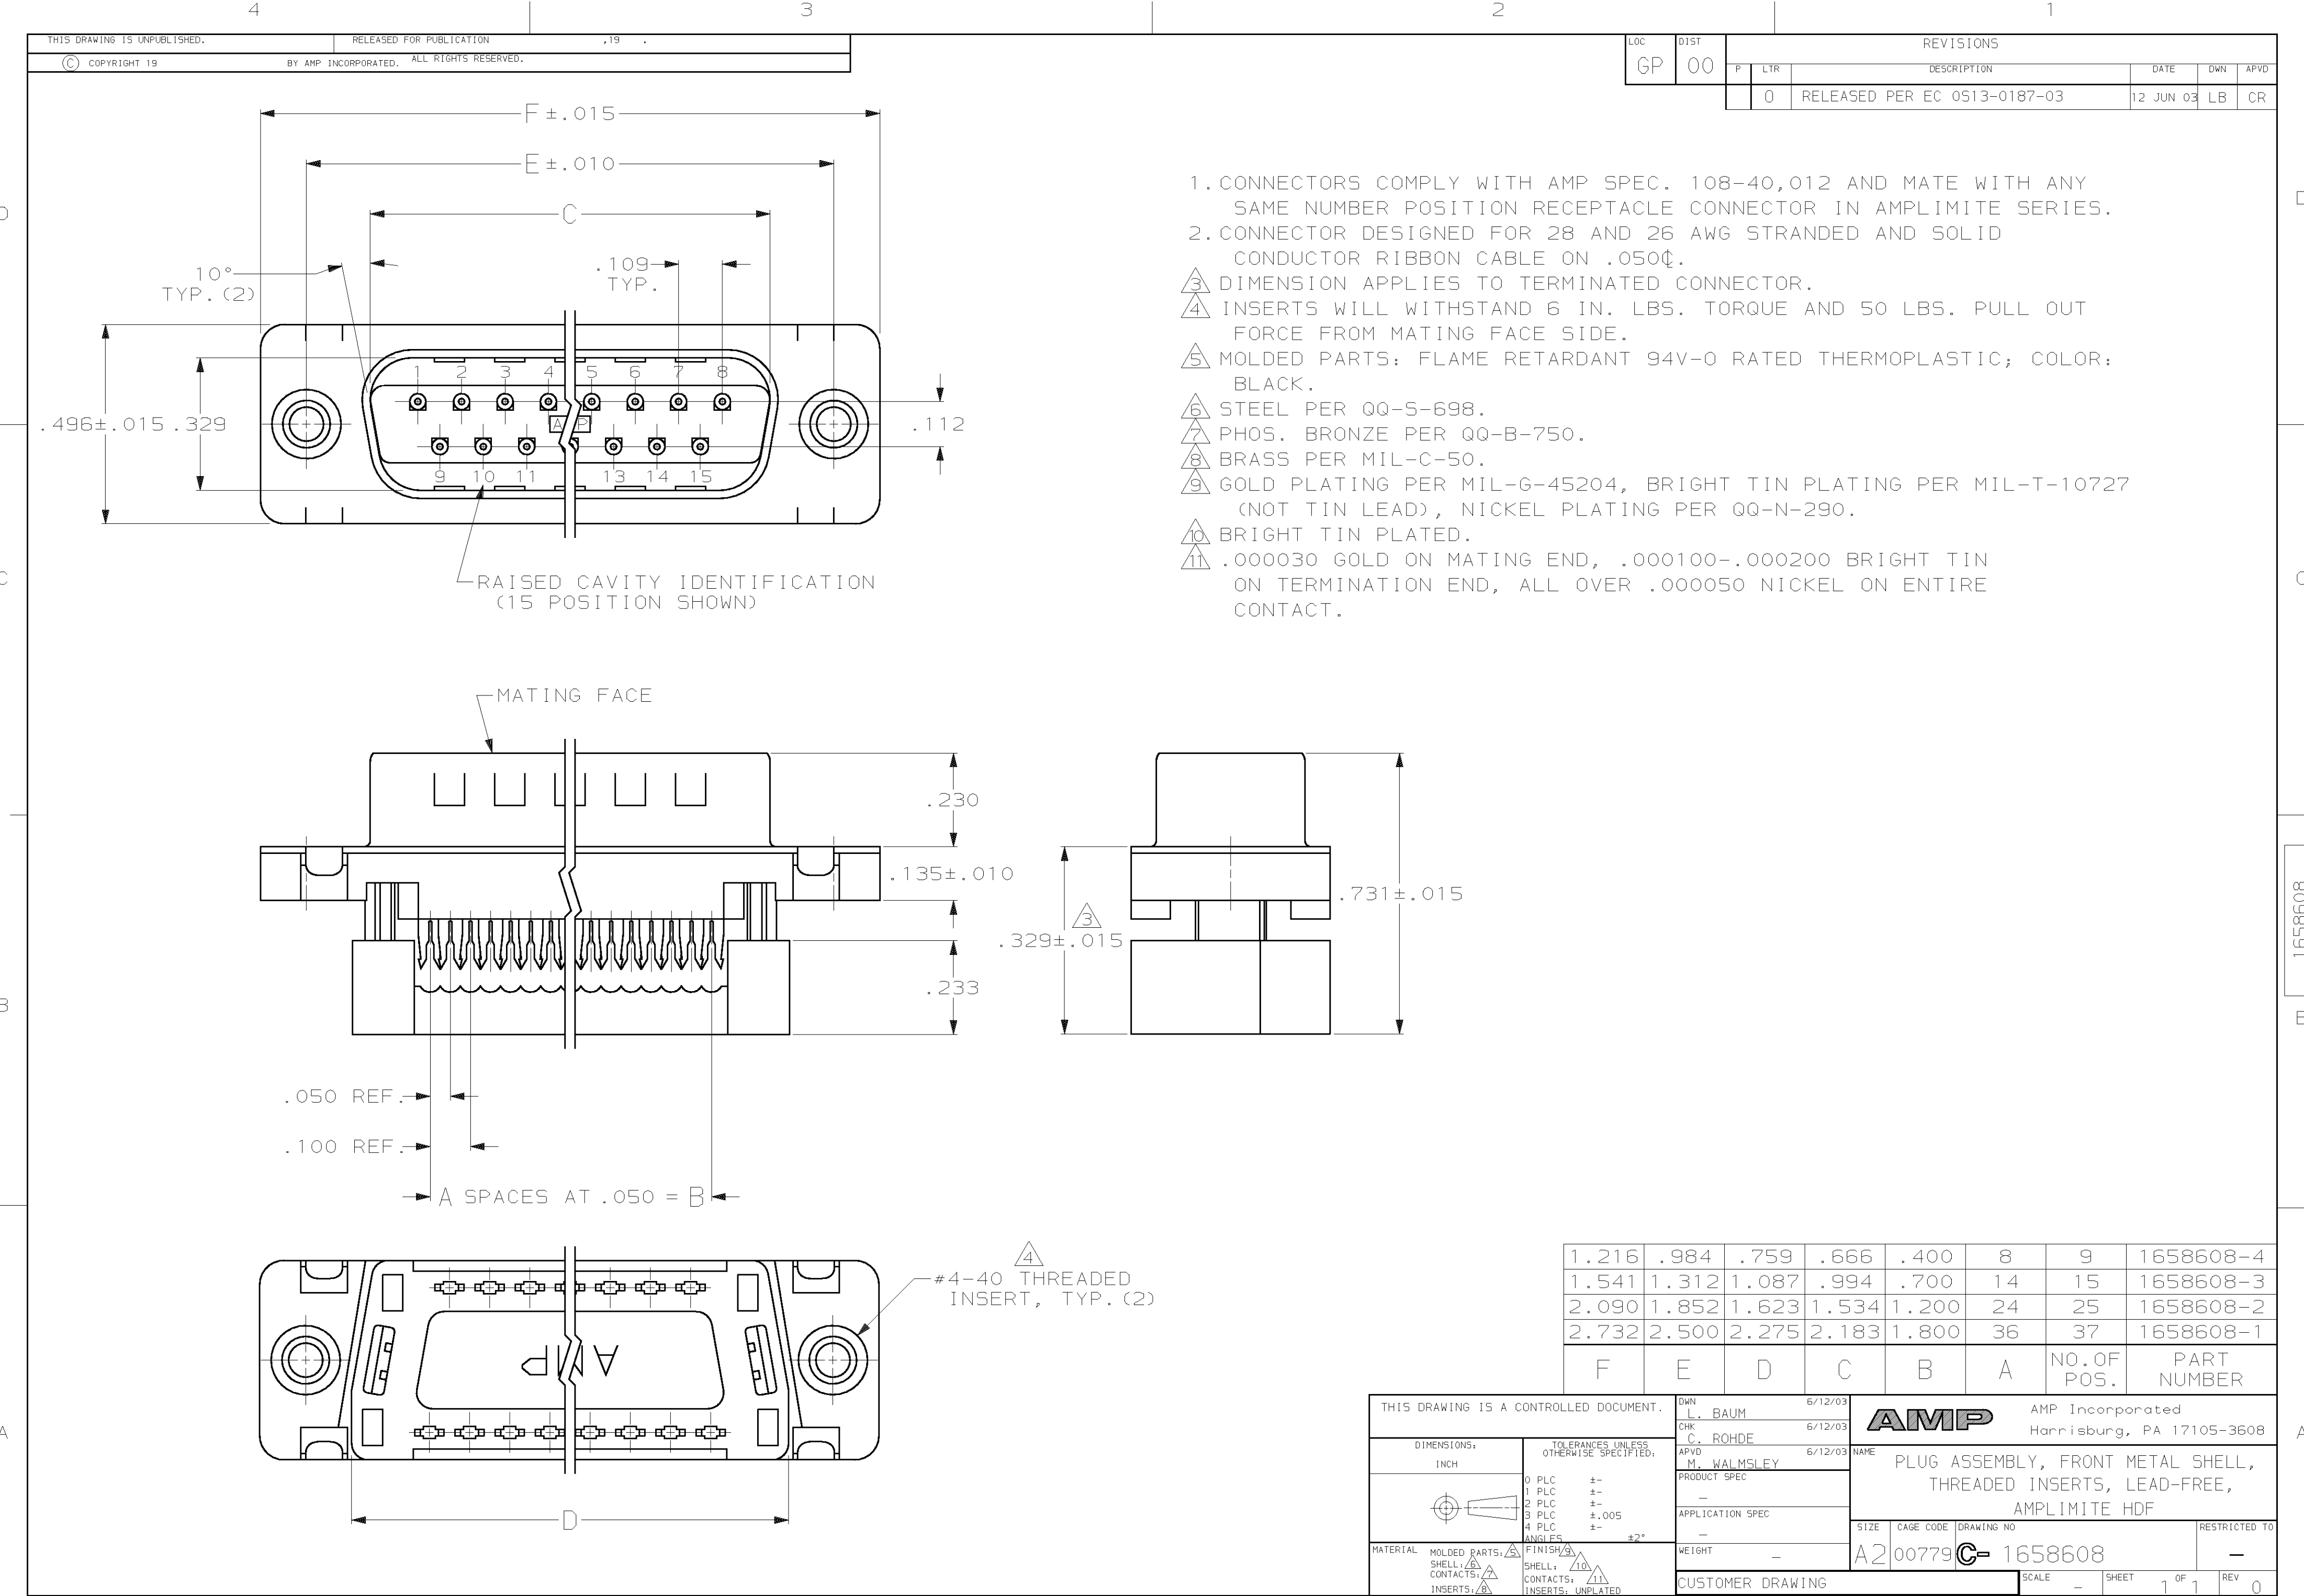

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
GP	00	0		RELEASED PER EC 0513-0187-03	12 JUN 03	CR

- CONNECTORS COMPLY WITH AMP SPEC. 108-40,012 AND MATE WITH ANY SAME NUMBER POSITION RECEPTACLE CONNECTOR IN AMPLIMITE SERIES.
- CONNECTOR DESIGNED FOR 28 AND 26 AWG STRANDED AND SOLID CONDUCTOR RIBBON CABLE ON .050 ϕ .
- DIMENSION APPLIES TO TERMINATED CONNECTOR.
- INSERTS WILL WITHSTAND 6 IN. LBS. TORQUE AND 50 LBS. PULL OUT FORCE FROM MATING FACE SIDE.
- MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
- STEEL PER QQ-S-698.
- PHOS. BRONZE PER QQ-B-750.
- BRASS PER MIL-C-50.
- GOLD PLATING PER MIL-G-45204, BRIGHT TIN PLATING PER MIL-T-10727 (NOT TIN LEAD), NICKEL PLATING PER QQ-N-290.
- BRIGHT TIN PLATED.
- .000030 GOLD ON MATING END, .000100-.000200 BRIGHT TIN ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.

1.216	.984	.759	.666	.400	8	9	1658608-4
1.541	1.312	1.087	.994	.700	14	15	1658608-3
2.090	1.852	1.623	1.534	1.200	24	25	1658608-2
2.732	2.500	2.275	2.183	1.800	36	37	1658608-1
F	E	D	C	B	A	NO.OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	6/12/03	AMP AMP Incorporated Harrisburg, PA 17105-3608			
DIMENSIONS: INCH		CHK	6/12/03				
		C. ROHDE		NAME			
		APVD		M. WALMSLEY			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
		0 PLC ±		APPLICATION SPEC			
MATERIAL		MOLDED PARTS: 3		FINISH: 9			
		SHELL: 6		SHELL: 10			
CONTACTS: 7		CONTACTS: 8		CONTACTS: 11			
		INSERTS: 8		INSERTS: UNPLATED			
WEIGHT		-		CUSTOMER DRAWING			
SIZE		A2		CAGE CODE			
DRAWING NO		00779		1658608			
RESTRICTED TO		-		SCALE			
SHEET		1		OF 1			
REV		0					