

Distributed by:

JAMECO[®]
ELECTRONICS


www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 923180

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		P	REV PER ECN 0G3B-0324-03	11JUN03	SC	DB

D	YES	71.12[2.800]	28	5-640620-8
	YES	68.58[2.700]	27	5-640620-7
	YES	66.04[2.600]	26	5-640620-6
	YES	63.50[2.500]	25	5-640620-5
	YES	60.96[2.400]	24	5-640620-4
	YES	58.42[2.300]	23	5-640620-3
	YES	55.88[2.200]	22	5-640620-2
	YES	53.34[2.100]	21	5-640620-1
	YES	50.80[2.000]	20	5-640620-0
	YES	48.26[1.900]	19	4-640620-9
C	YES	45.72[1.800]	18	4-640620-8
	YES	43.18[1.700]	17	4-640620-7
	YES	40.64[1.600]	16	4-640620-6
	YES	38.10[1.500]	15	4-640620-5
	YES	35.56[1.400]	14	4-640620-4
	YES	33.02[1.300]	13	4-640620-3
	YES	30.48[1.200]	12	4-640620-2
	YES	27.94[1.100]	11	4-640620-1
	YES	25.40[1.000]	10	4-640620-0
	YES	22.86[.900]	9	3-640620-9
B	YES	20.32[.800]	8	3-640620-8
	YES	17.78[.700]	7	3-640620-7
	YES	15.24[.600]	6	3-640620-6
	YES	12.70[.500]	5	3-640620-5
	YES	10.16[.400]	4	3-640620-4
	YES	7.62[.300]	3	3-640620-3
	YES	5.08[.200]	2	3-640620-2
	NO	71.12[2.800]	28	2-640620-8
	NO	68.58[2.700]	27	2-640620-7
	NO	66.04[2.600]	26	2-640620-6
A	NO	63.50[2.500]	25	2-640620-5
	NO	60.96[2.400]	24	2-640620-4
	NO	58.42[2.300]	23	2-640620-3
	NO	55.88[2.200]	22	2-640620-2
	NO	53.34[2.100]	21	2-640620-1
	NO	50.80[2.000]	20	2-640620-0
	NO	48.26[1.900]	19	1-640620-9
	NO	45.72[1.800]	18	1-640620-8
	NO	43.18[1.700]	17	1-640620-7
	NO	40.64[1.600]	16	1-640620-6
	NO	38.10[1.500]	15	1-640620-5
	NO	35.56[1.400]	14	1-640620-4
	NO	33.02[1.300]	13	1-640620-3
	NO	30.48[1.200]	12	1-640620-2
	NO	27.94[1.100]	11	1-640620-1
	NO	25.40[1.000]	10	1-640620-0
	NO	22.86[.900]	9	640620-9
	NO	20.32[.800]	8	640620-8
	NO	17.78[.700]	7	640620-7
	NO	15.24[.600]	6	640620-6
	NO	12.70[.500]	5	640620-5
	NO	10.16[.400]	4	640620-4
	NO	7.62[.300]	3	640620-3
	NO	5.08[.200]	2	640620-2
	LEADFREE	DIM A	NO. OF CIRCUITS	PART NO.

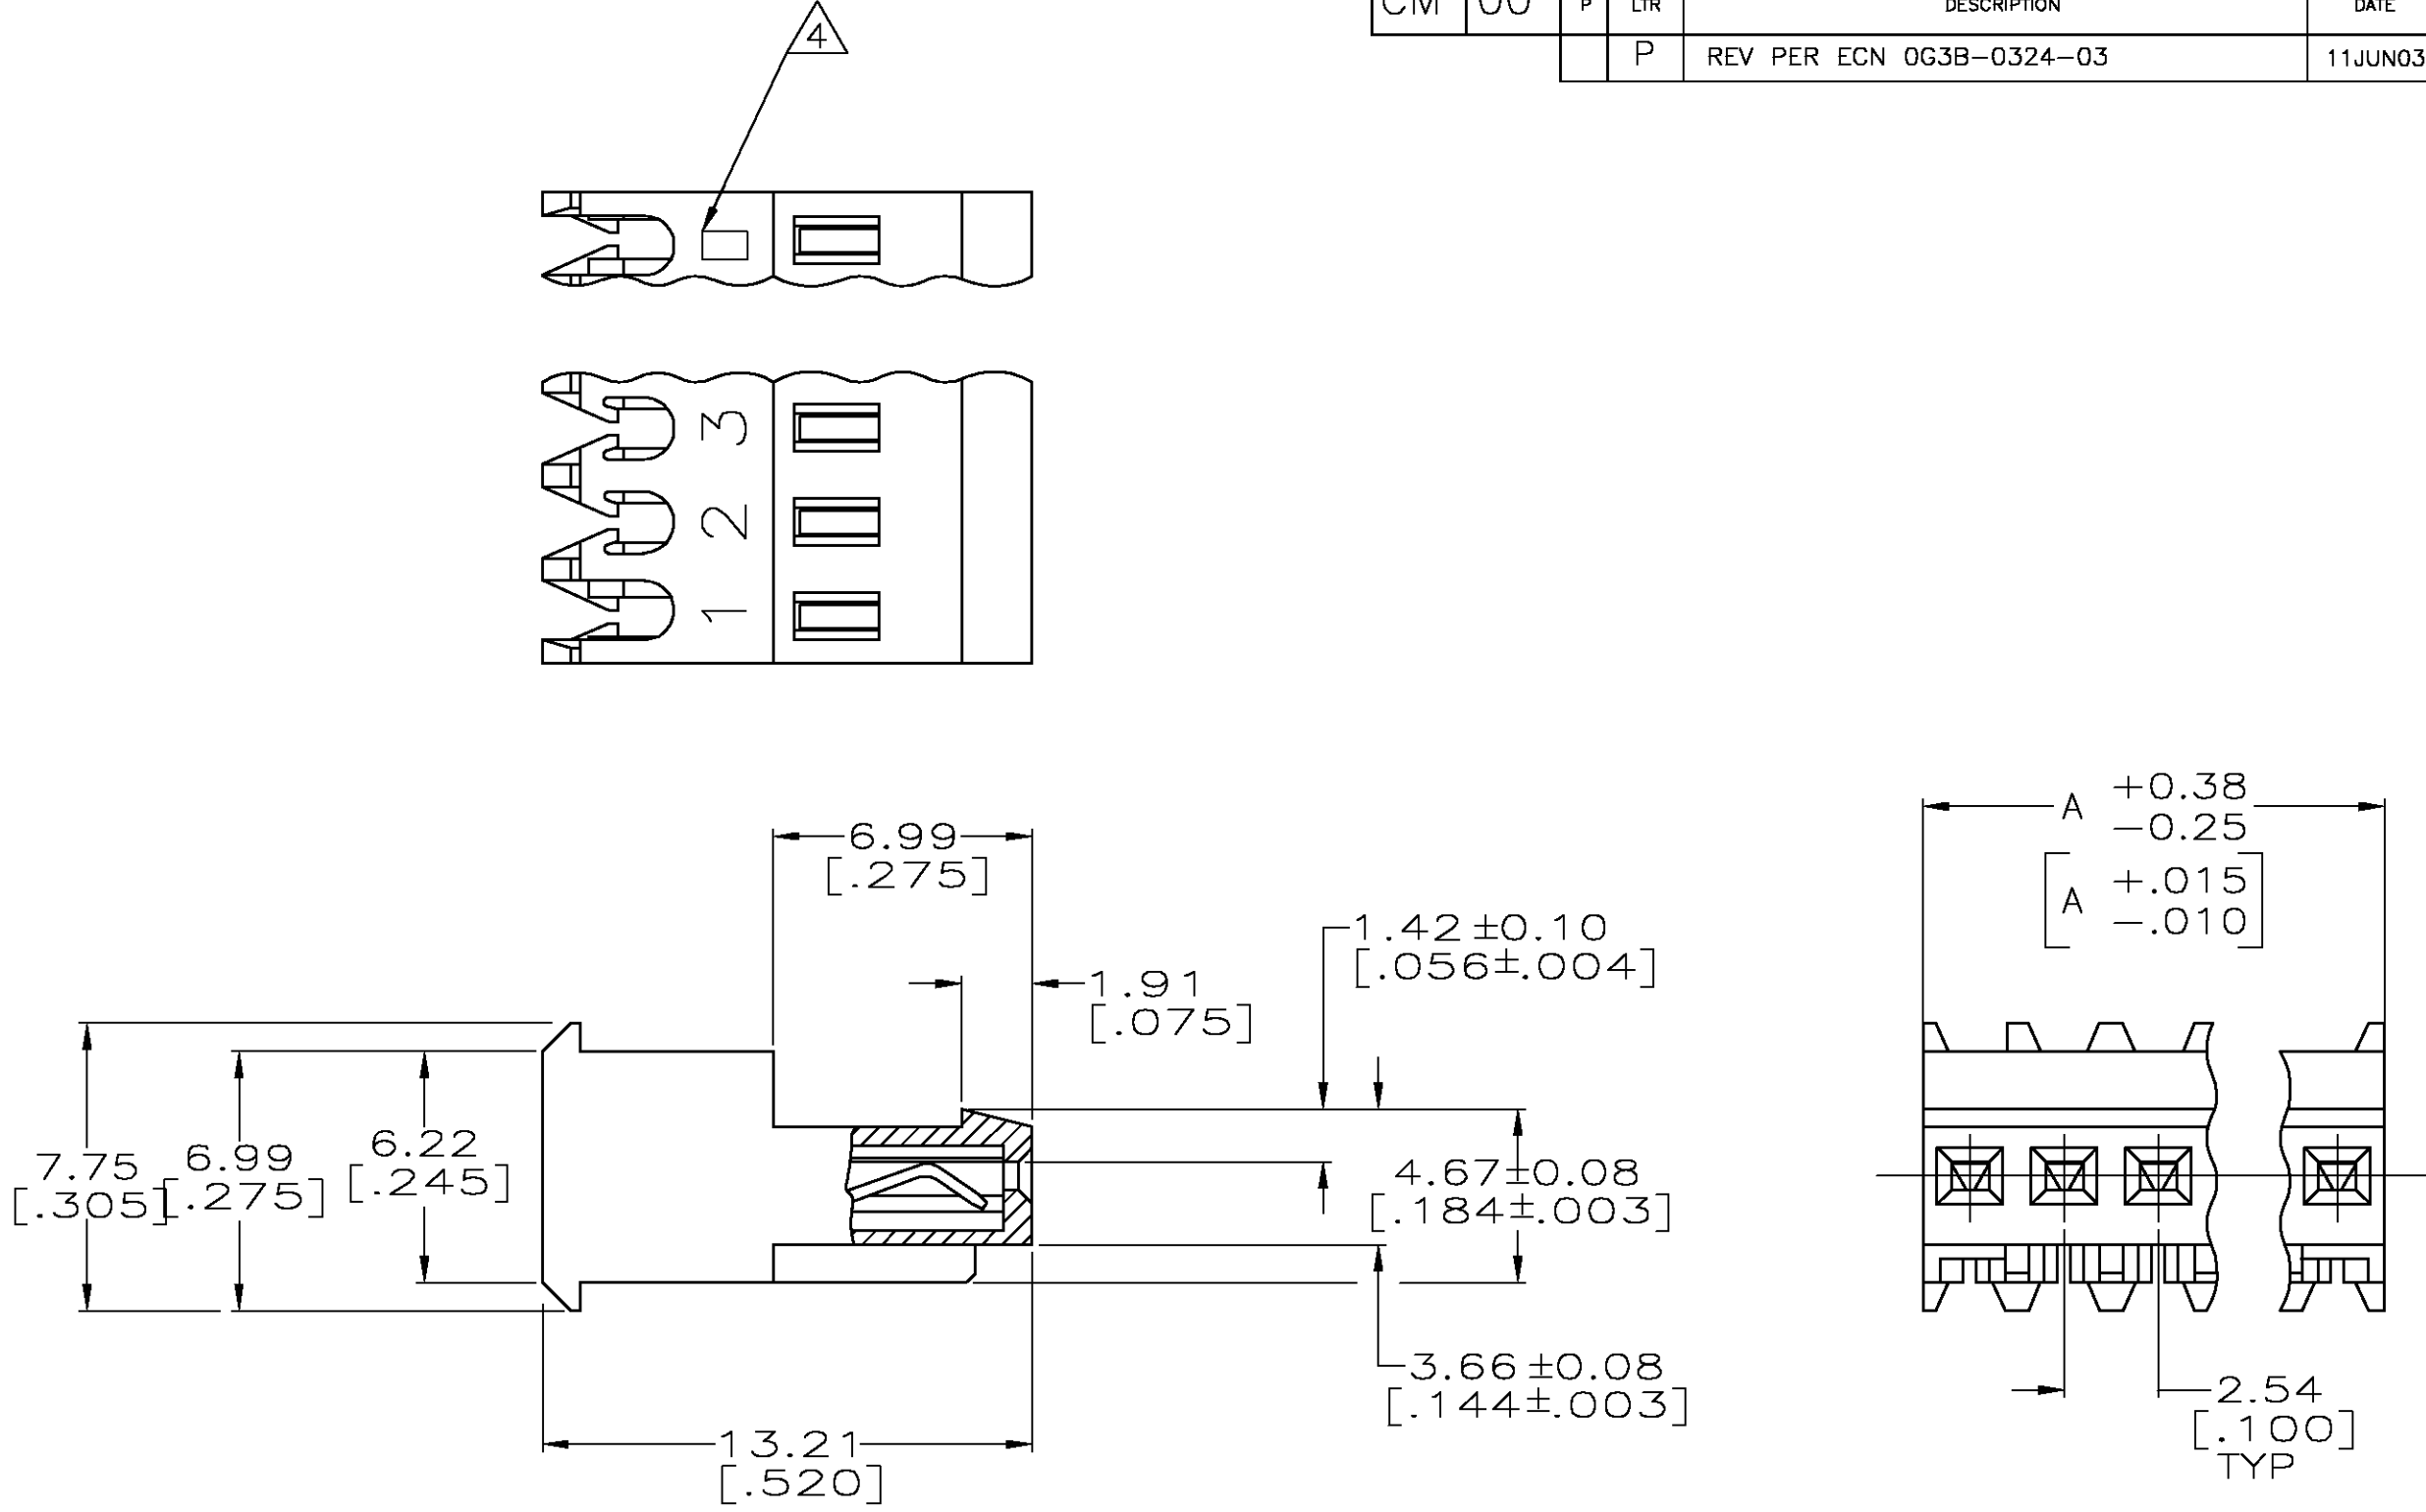

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
BRIGHT TIN-LEAD .00203[.000080] MIN THICKNESS
FOR 640620-2 THRU 2-640620-8.
BRIGHT TIN .00305[.000120] MIN THICKNESS
FOR 3-640620-2 THRU 5-640620-8.
2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 0.64±0.03[.025] POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: FEED THRU WITH LOCKING RAMP.



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 11JUN2003	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		CHK D. BOSSI 11JUN2003		
		APVD D. BOSSI 11JUN2003	NAME MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD	
		PRODUCT SPEC 108-1050		
MATERIAL 1		APPLICATION SPEC 114-1019	SIZE A2	CAGE CODE 00779
FINISH 1		WEIGHT	DRAWING NO C=640620	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1
			REV P	

A/C BUSINESS GROUP 3323 177-34 *NICK GANNON*