



Distributed by:

JAMECO[®]
ELECTRONICS





www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 948977

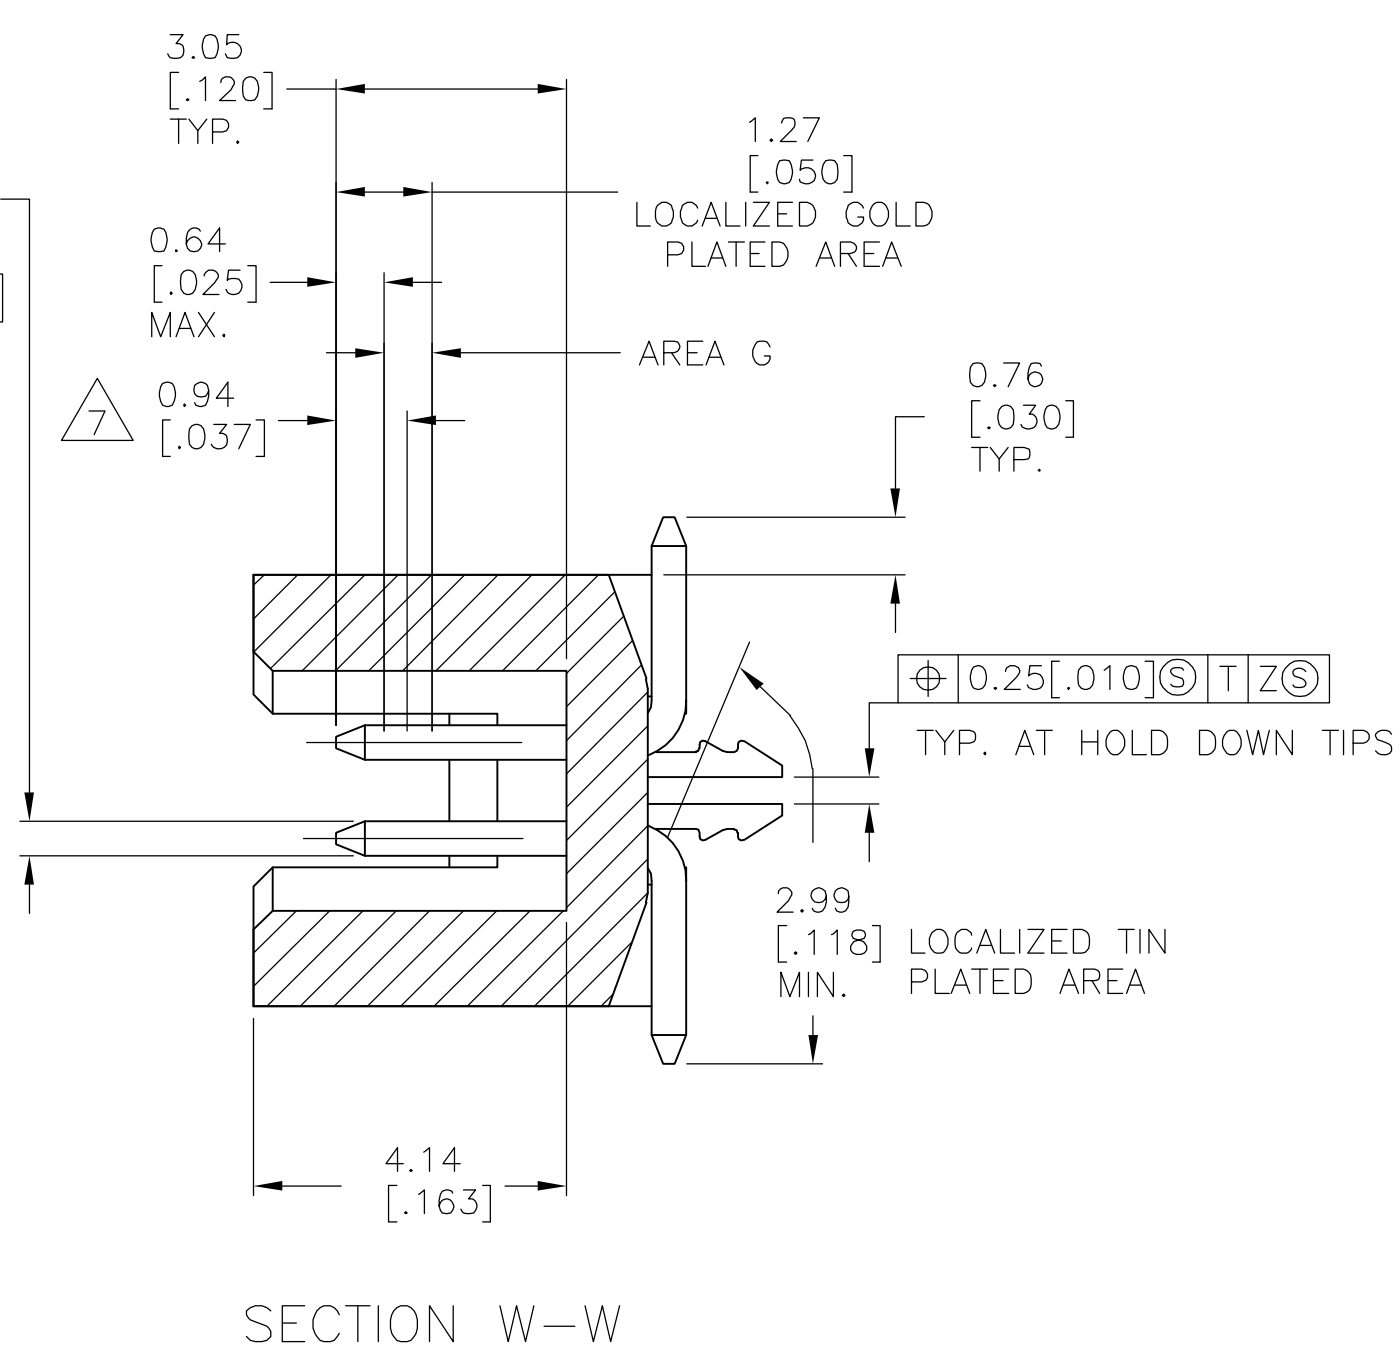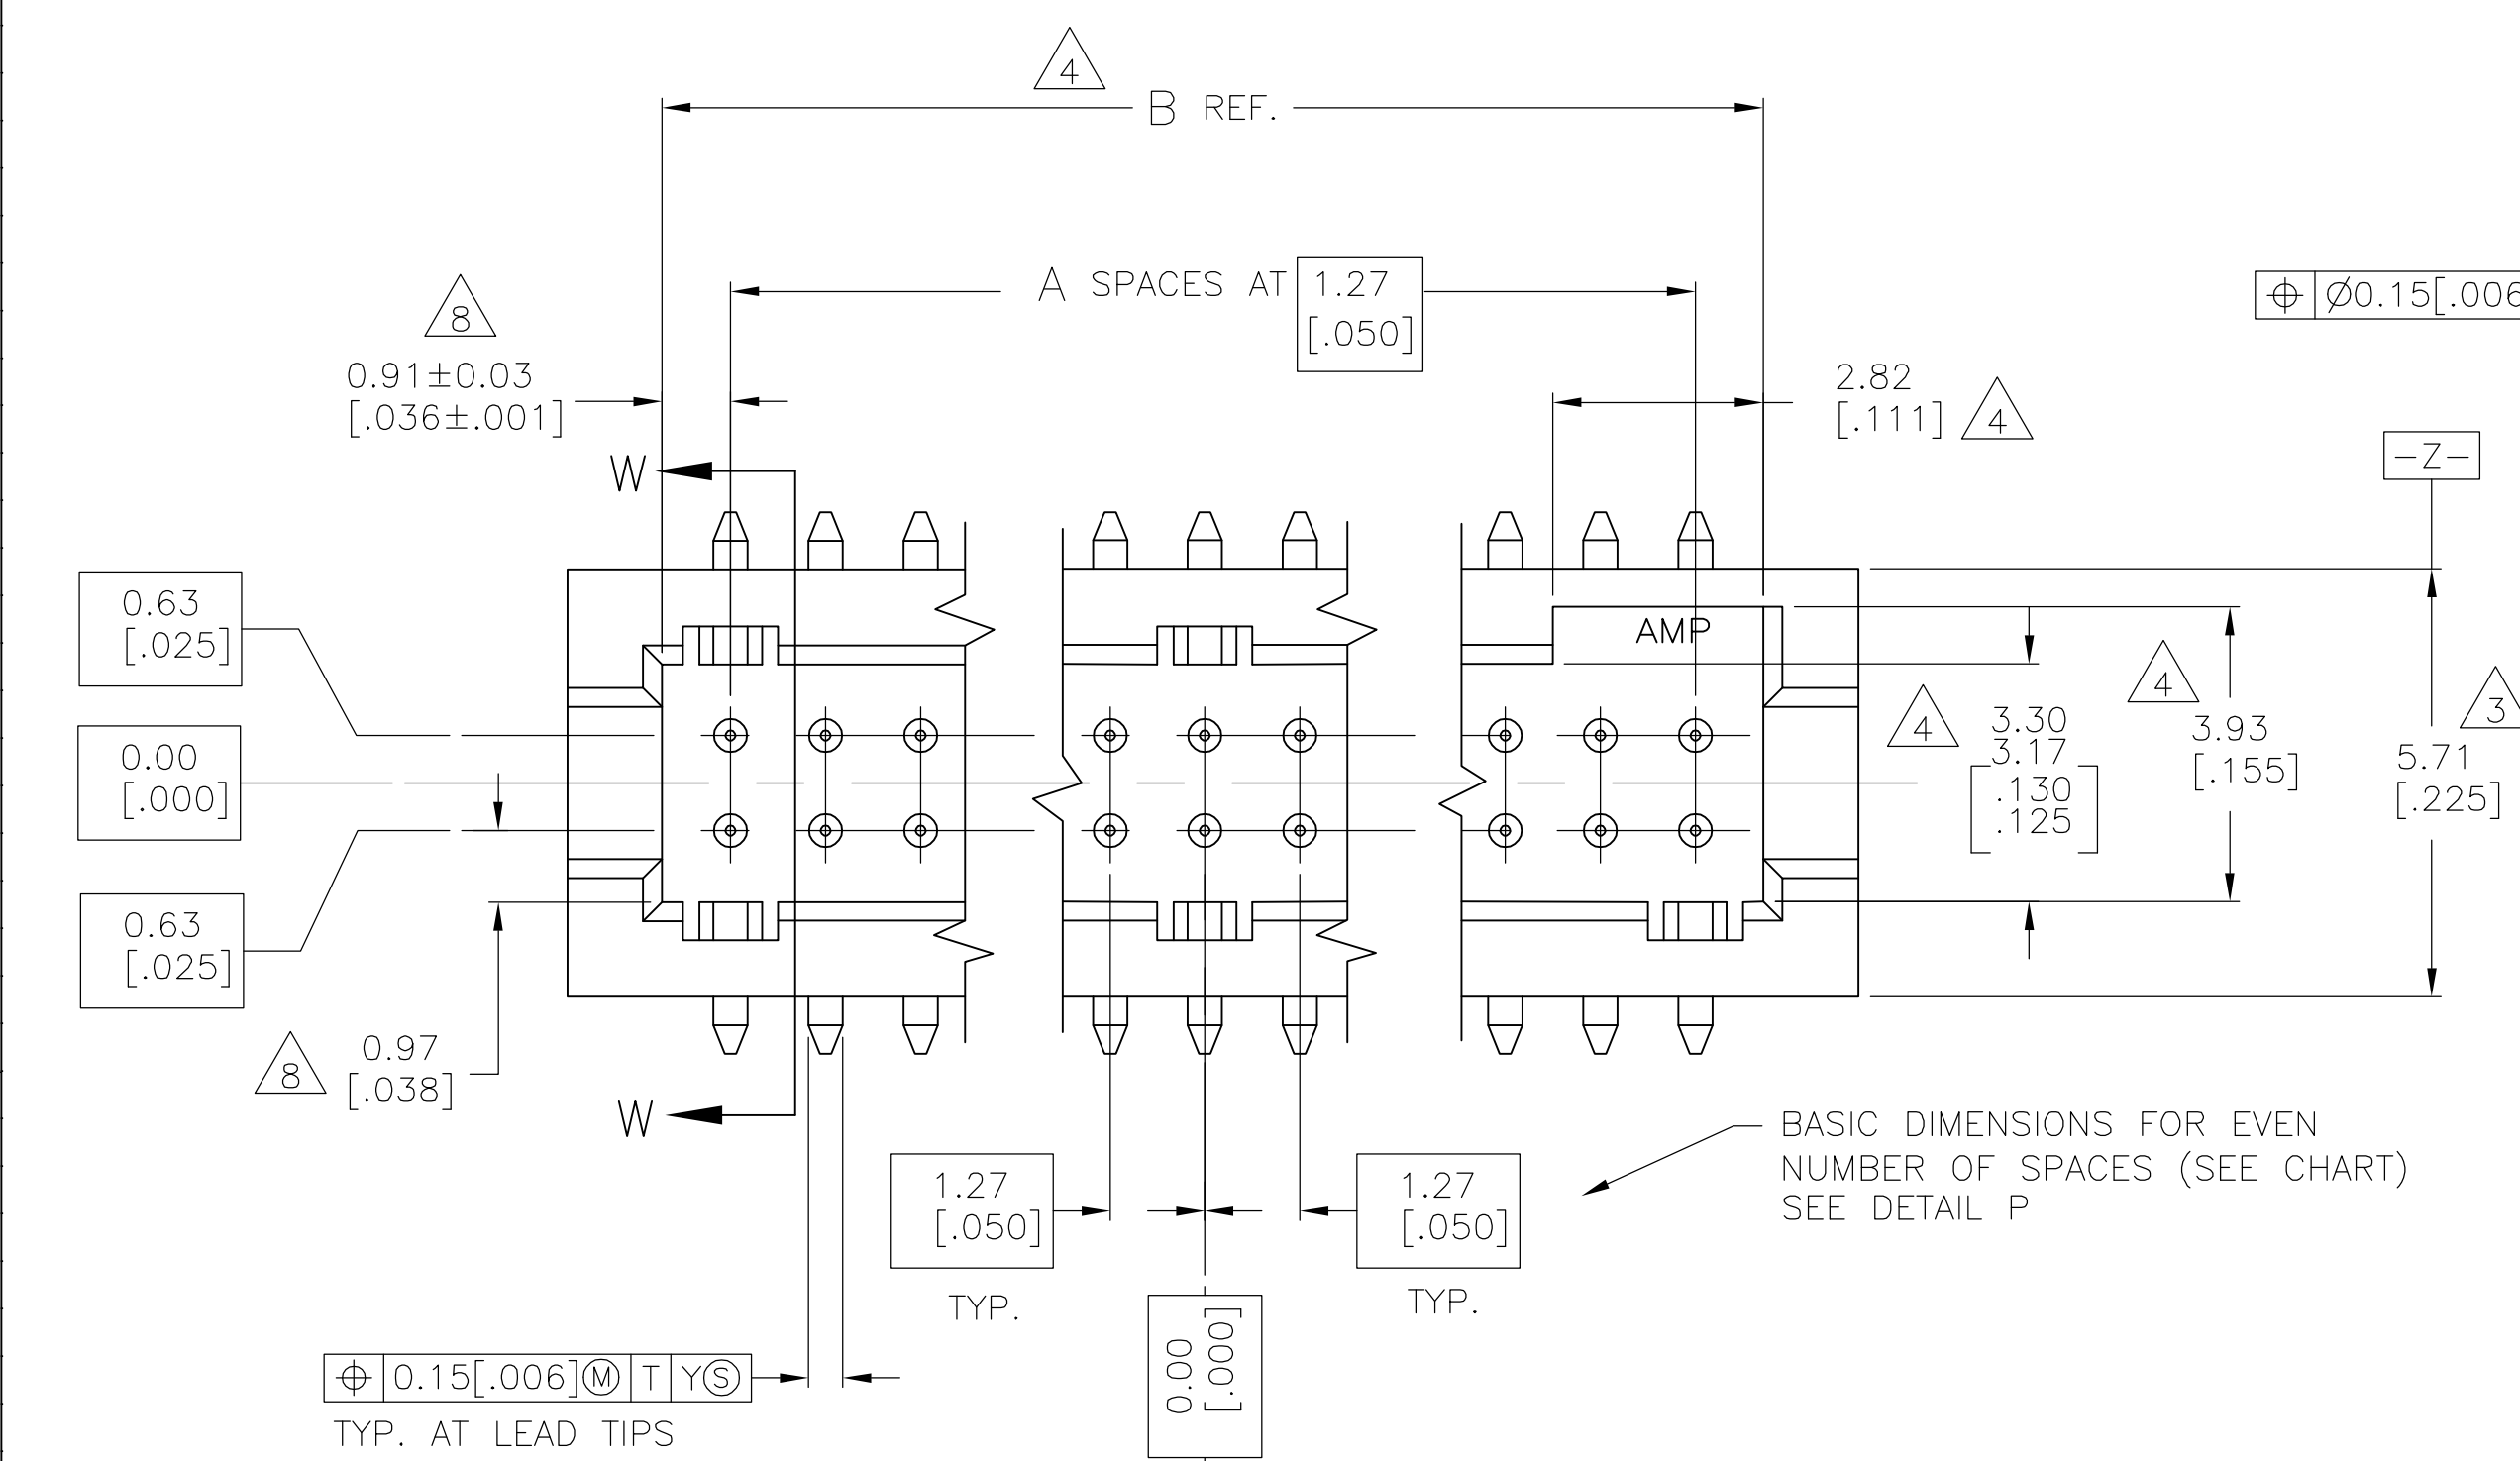

- 1 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN-LEAD ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL
- 2 USE 1.32±0.02 [.052±.001] DRILLED HOLE (#55 DRILL). FINISH TO BE TIN OVER 0.02 [.001] MIN COPPER.
- 3 DIMENSION APPLIES AT BASE OF SHROUD.
- 4 THE NOTED DIMENSIONS APPLY AT THE MATING FACE OF THE HOUSING.
- 5 0.0038 [.000150] TIN-LEAD ON HOLD DOWN, ALL OVER 0.0013 [.000050] NICKEL.
- 6 IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT 2 BOARDS, PLEASE REFER TO THE SPACING PARAGRAPH IN APPLICATION SPEC, #114-7010
- 7 POINT OF MEASUREMENT
- 8 DIMENSIONS NOTED APPLY FROM THE BASIC DIMENSION LINE (NOT THE CIRCUIT CAVITY CENTER LINE) TO THE SURFACE INDICATED.
- 9 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.
- 10 0.0035[.000150] TIN ON HOLDDOWN, ALL OVER 0.0013[.000050] NICKEL
- 11 ROHS 2002/95/EC COMPLIANT.

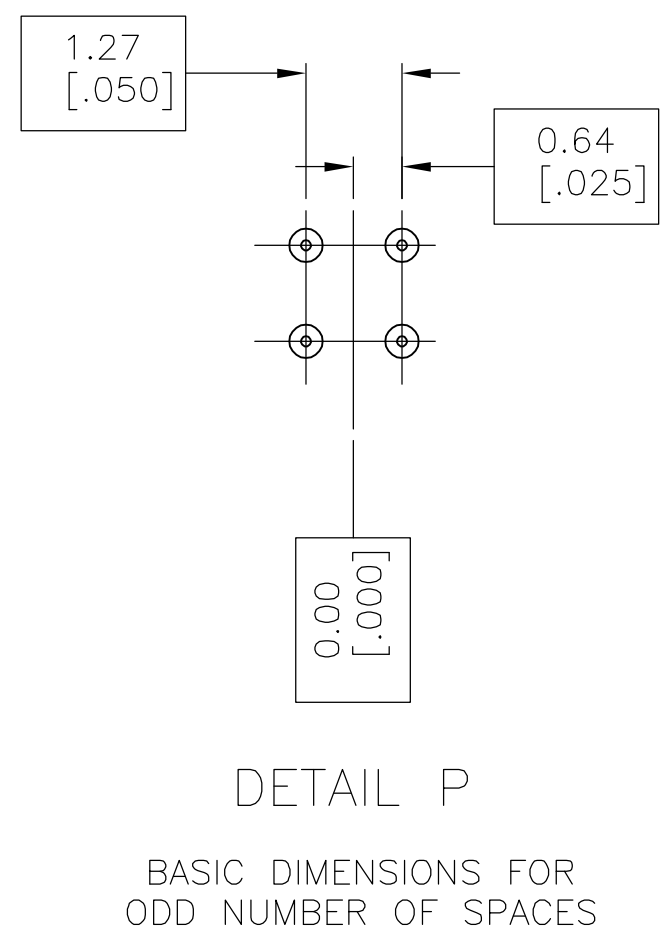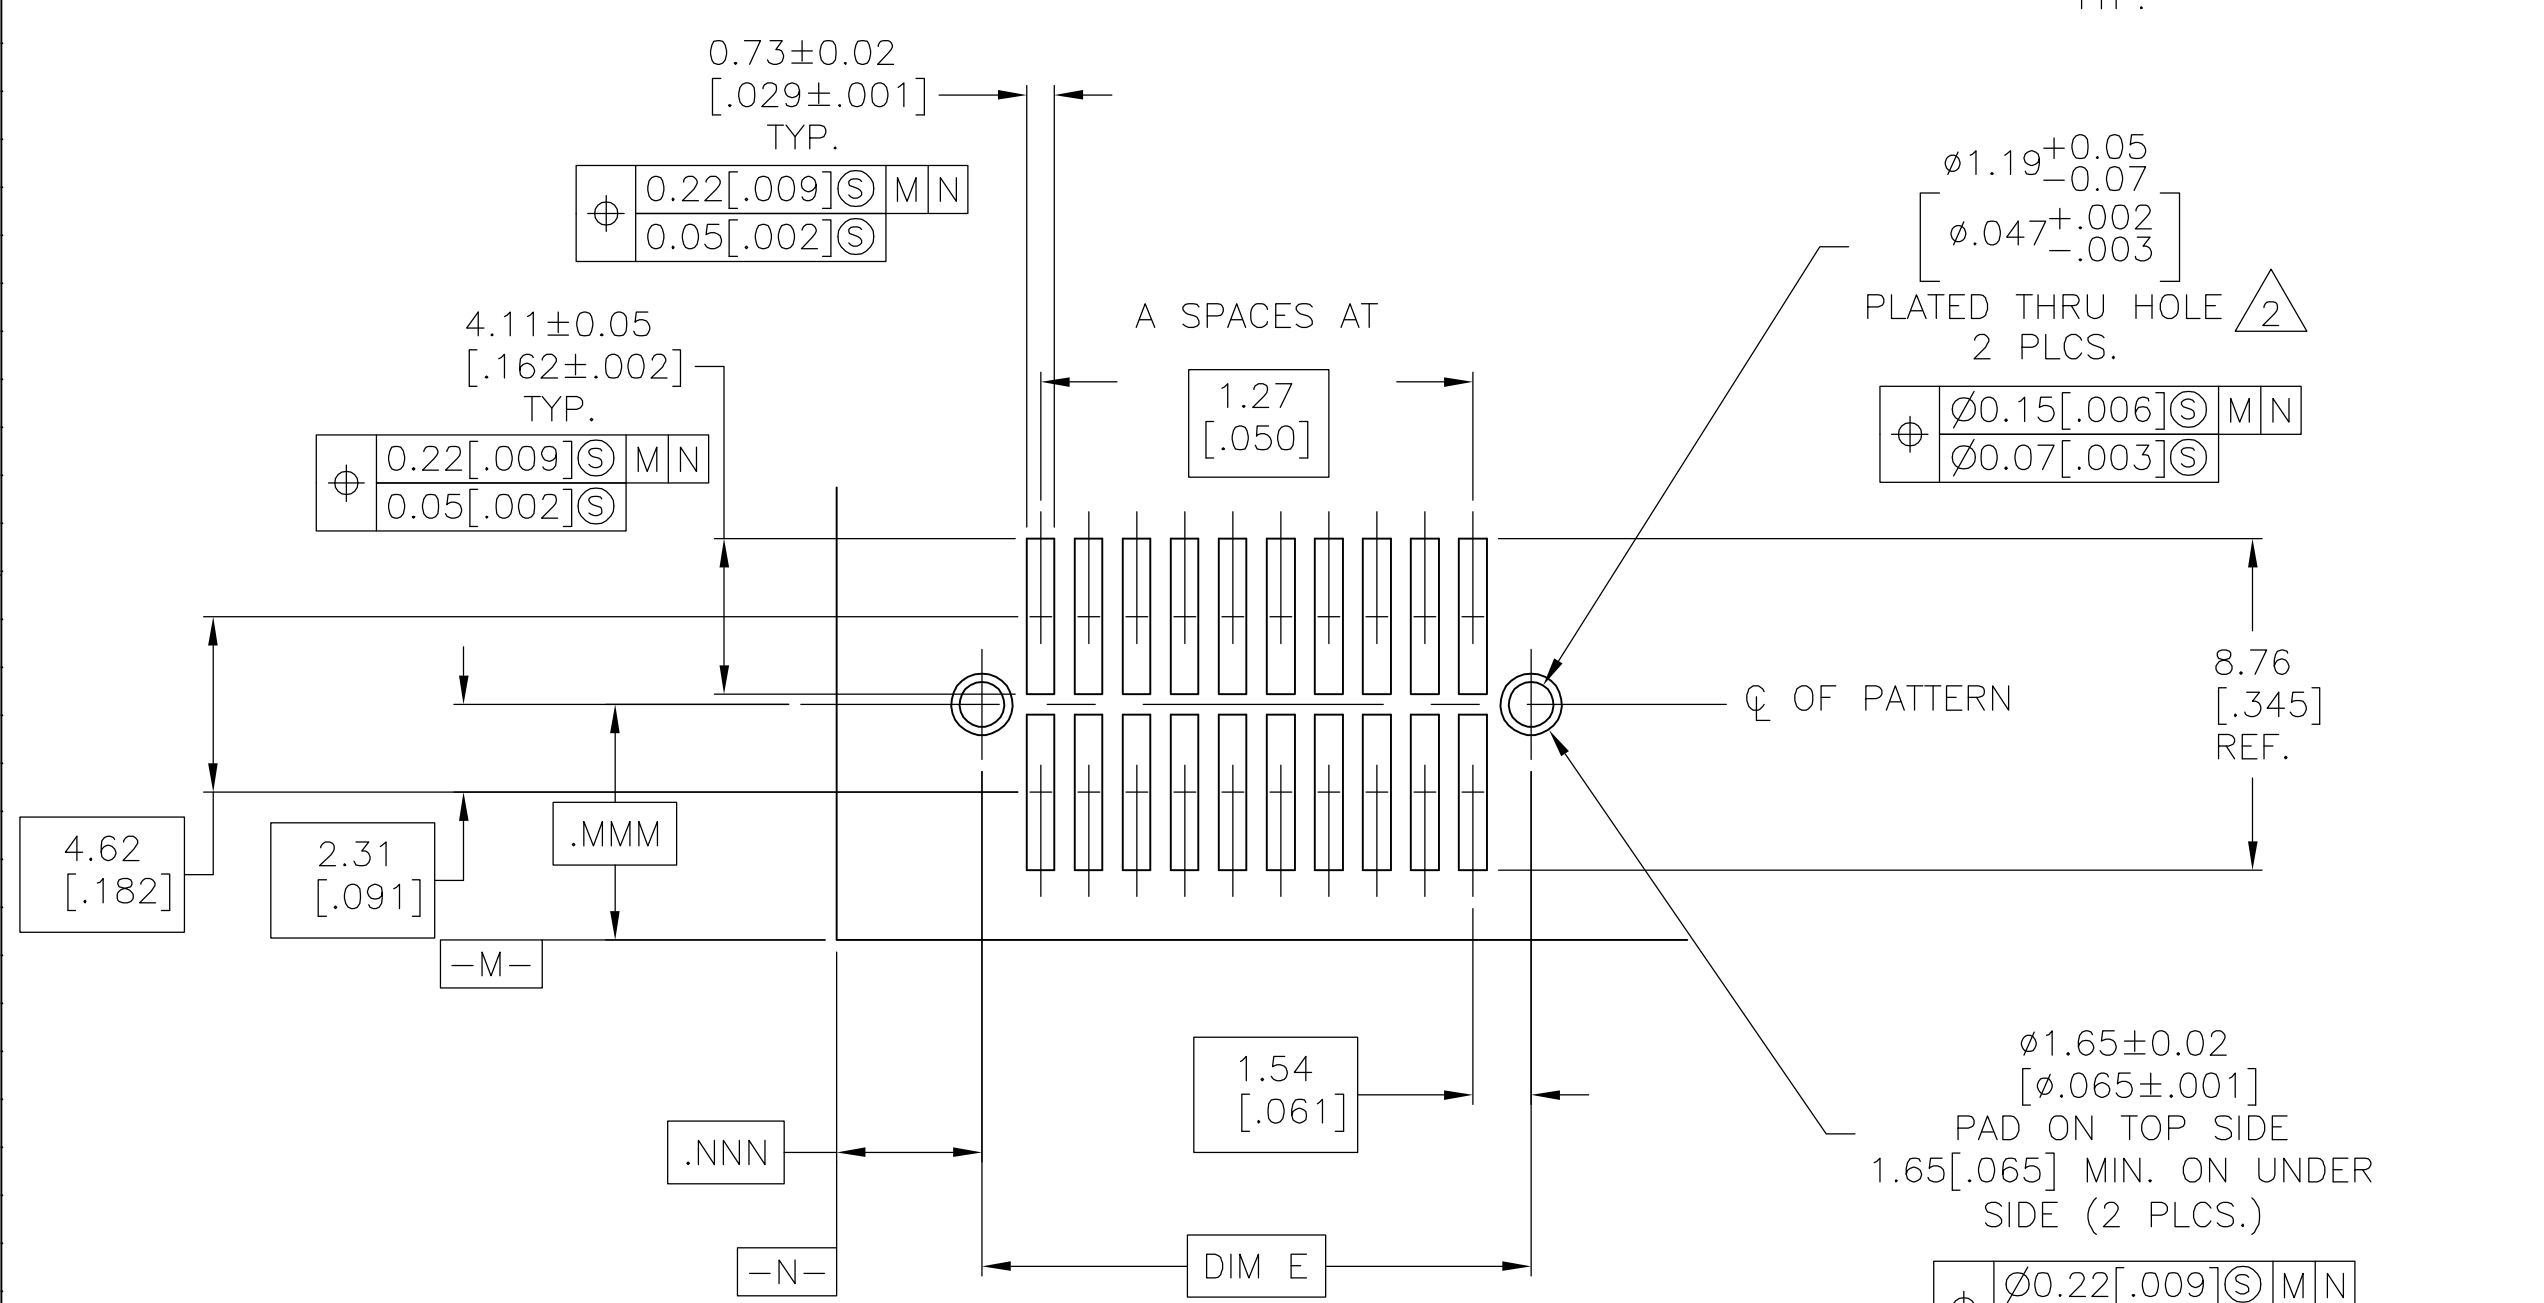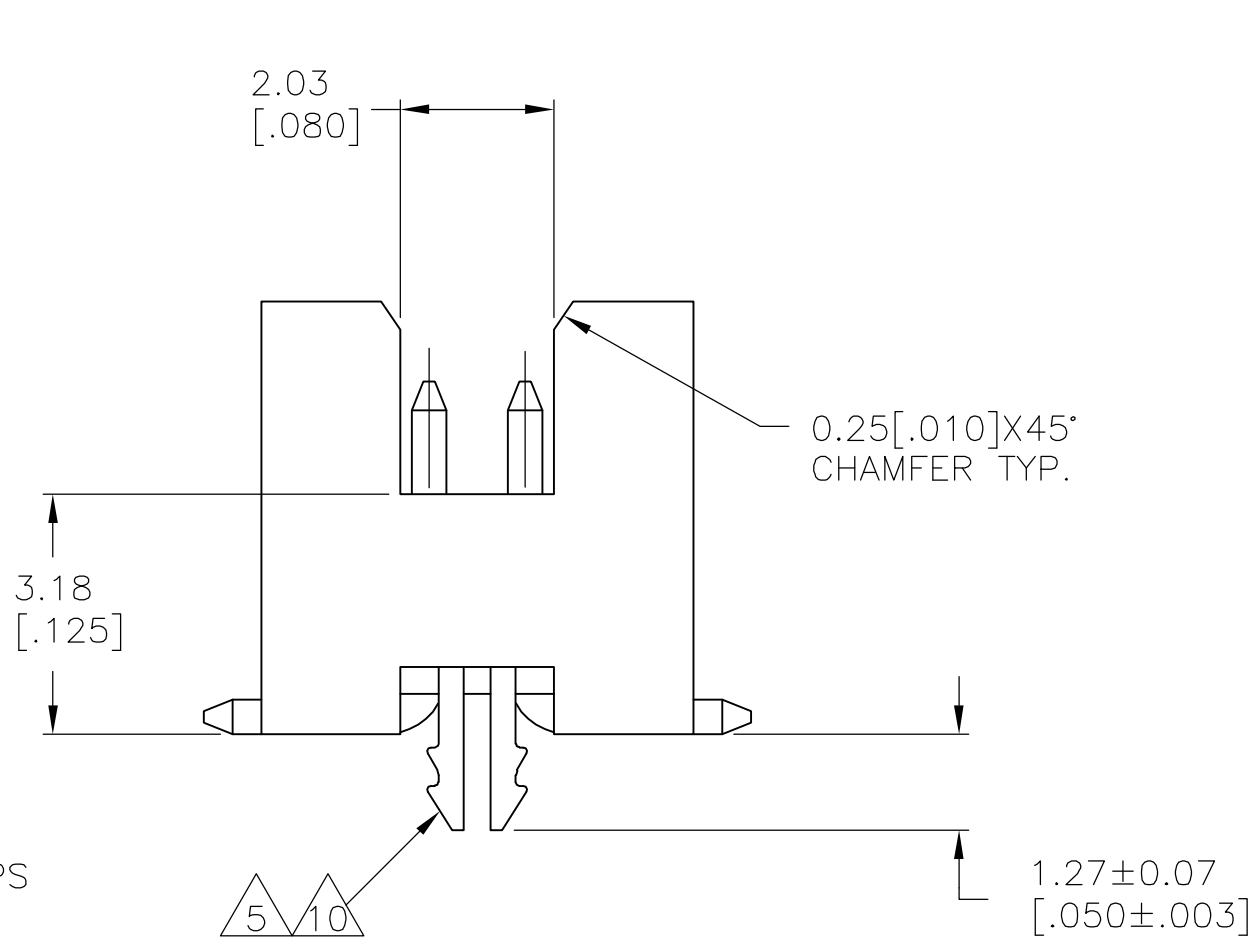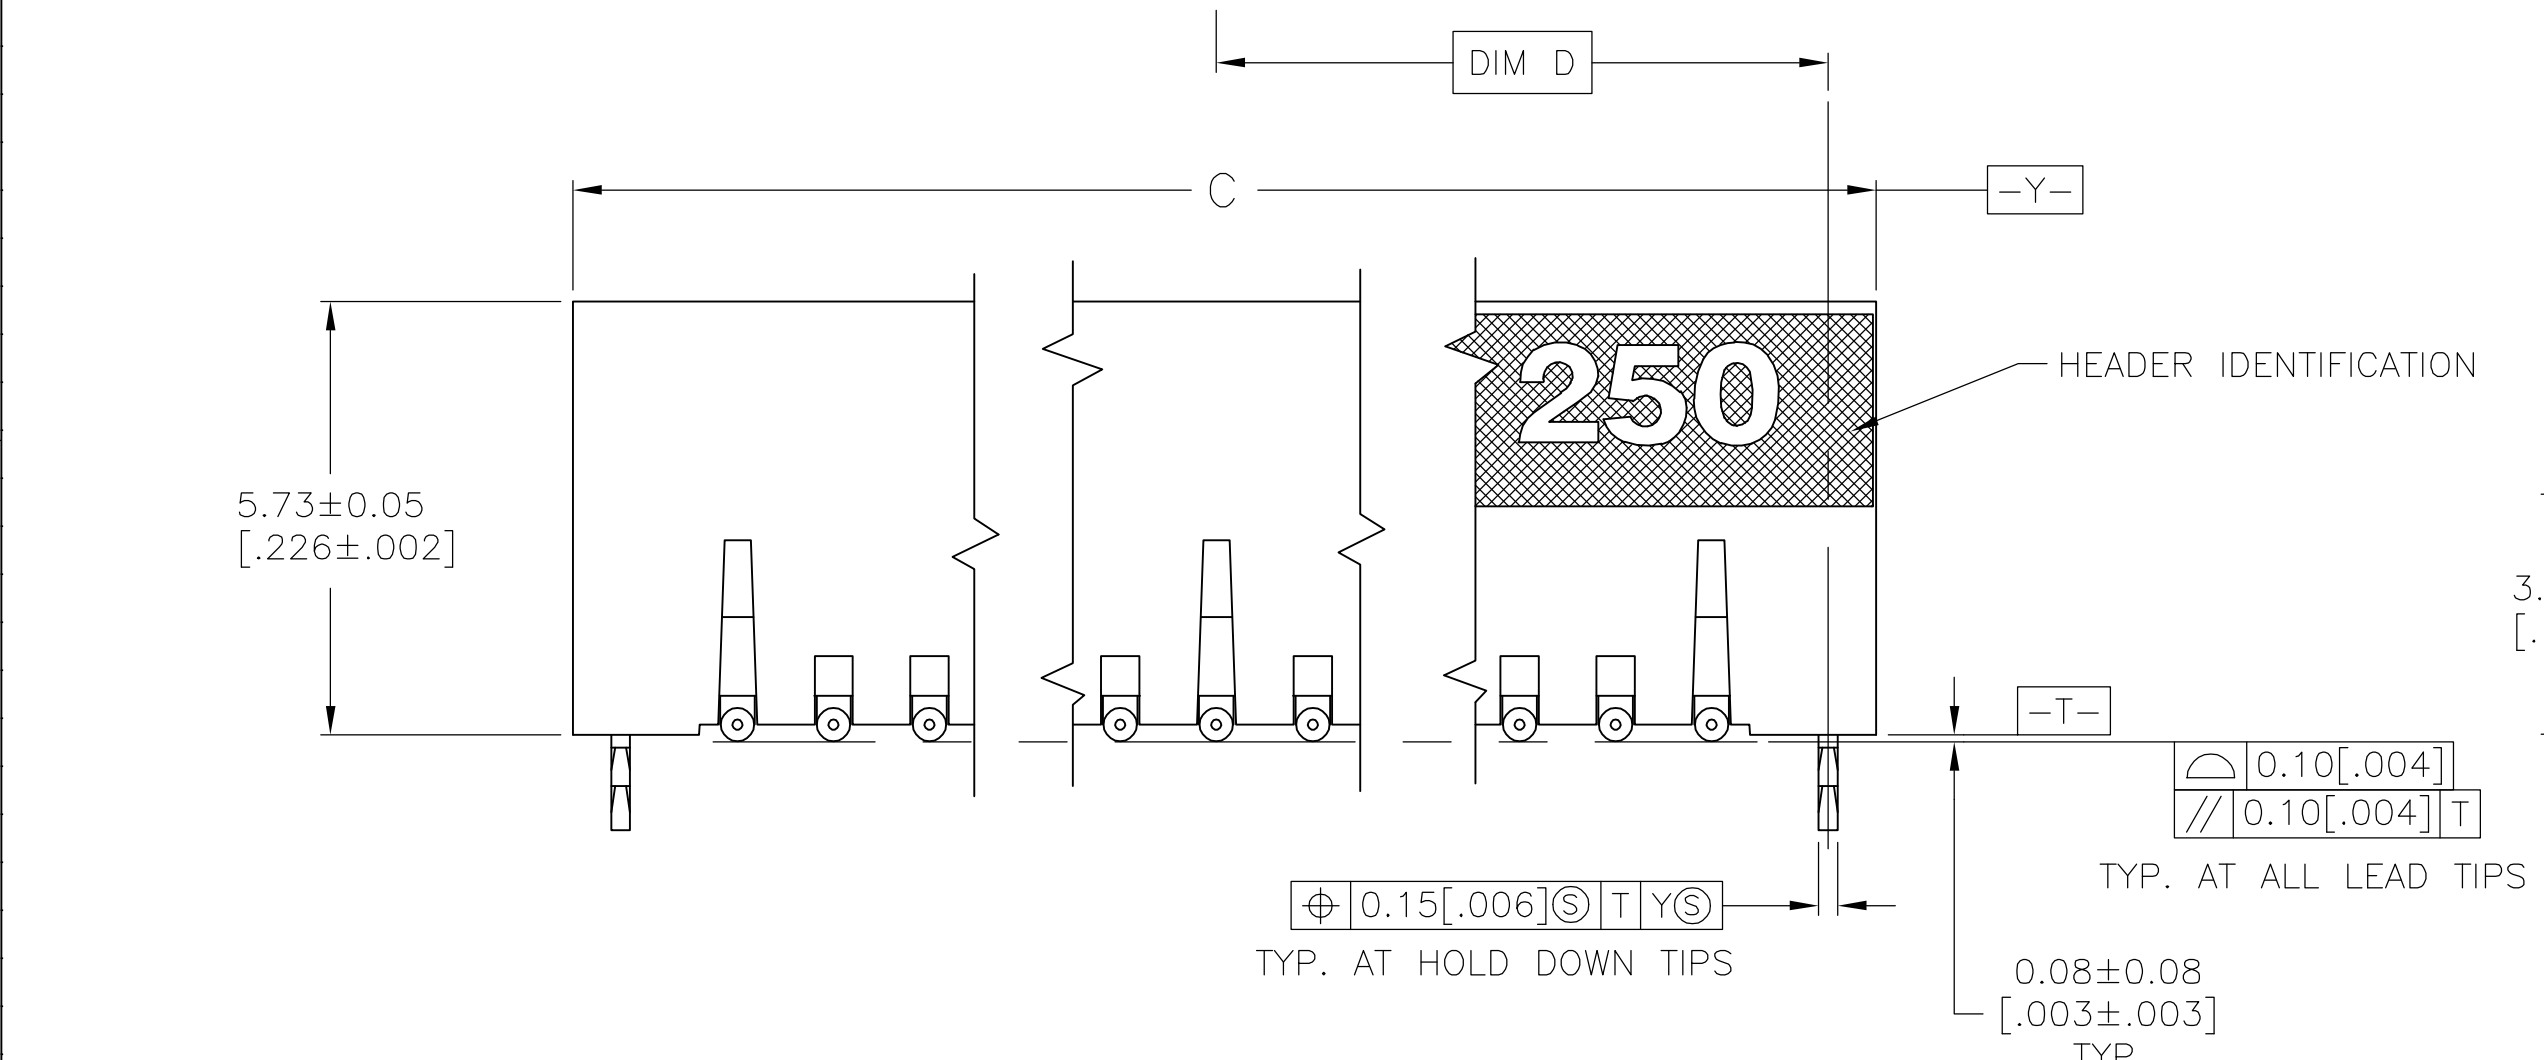

OBSOLETE

OBSOLETE

11	9 10	65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	6-104655-1
11	9 10	58.97 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	6-104655-0
11	9 10	52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	5-104655-9
11	9 10	46.28 [1.822]	23.13 [.911]	47.54 [1.872]	45.00 [1.772]	34	70	5-104655-8
11	9 10	39.93 [1.572]	19.96 [.786]	41.19 [1.622]	38.65 [1.522]	29	60	5-104655-7
11	9 10	33.58 [1.322]	16.78 [.661]	34.84 [1.372]	32.30 [1.272]	24	50	5-104655-6
11	9 10	27.23 [1.072]	13.61 [.536]	28.49 [1.122]	25.95 [1.022]	19	40	5-104655-5
11	9 10	20.88 [.822]	10.43 [.411]	22.14 [.872]	19.60 [.772]	14	30	5-104655-4
11	9 10	14.53 [.572]	7.26 [.286]	15.79 [.622]	13.25 [.522]	9	20	5-104655-3
11	9 10	11.98 [.472]	5.99 [.236]	13.25 [.522]	10.72 [.422]	7	16	5-104655-2
11	9 10	8.18 [.322]	4.08 [.161]	9.44 [.372]	6.90 [.272]	4	10	5-104655-1
1	1 5	65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	1-104655-1
1	1 5	58.97 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	1-104655-0
1	1 5	52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	104655-9
1	1 5	46.28 [1.822]	23.13 [.911]	47.54 [1.872]	45.00 [1.772]	34	70	104655-8
1	1 5	39.93 [1.572]	19.96 [.786]	41.19 [1.622]	38.65 [1.522]	29	60	104655-7
1	1 5	33.58 [1.322]	16.78 [.661]	34.84 [1.372]	32.30 [1.272]	24	50	104655-6
1	1 5	27.23 [1.072]	13.61 [.536]	28.49 [1.122]	25.95 [1.022]	19	40	104655-5
1	1 5	20.88 [.822]	10.43 [.411]	22.14 [.872]	19.60 [.772]	14	30	104655-4
1	1 5	14.53 [.572]	7.26 [.286]	15.79 [.622]	13.25 [.522]	9	20	104655-3
1	1 5	11.98 [.472]	5.99 [.236]	13.25 [.522]	10.72 [.422]	7	16	104655-2
1	1 5	8.18 [.322]	4.08 [.161]	9.44 [.372]	6.90 [.272]	4	10	104655-1
FINISH		E	D	C	B	A	NUMBER OF POSITIONS	PART NUMBER

RECOMMENDED BOARD LAYOUT
SCALE-5:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM KATE HELM 08/07/91
CHK D GORENC 8/12/91
APVD D FORKER 8/12/91
NAME
PRODUCT SPEC
108-1332
APPLICATION SPEC
114-7010
MATERIAL HOUSING: LCP, COLOR-BLACK POST: PHOS BRONZE HOLD: WOVN COPPER ALLOY
FINISH SEE TABLE
WEIGHT
CUSTOMER DRAWING
SCALE 10:1 SHEET 1 OF 1 REV L1

Tyco Electronics Corporation
Harriburg, Pa 17105-3608
HEADER ASSEMBLY, SURFACE MOUNT, AMPMODU 50/50 GRID (6.35[.250] MATED HEIGHT)
SIZE CAGE CODE DRAWING NO
A1 00779 104655
RESTRICTED TO