


Distributed by:

JAMECO[®]
ELECTRONICS


www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 958796

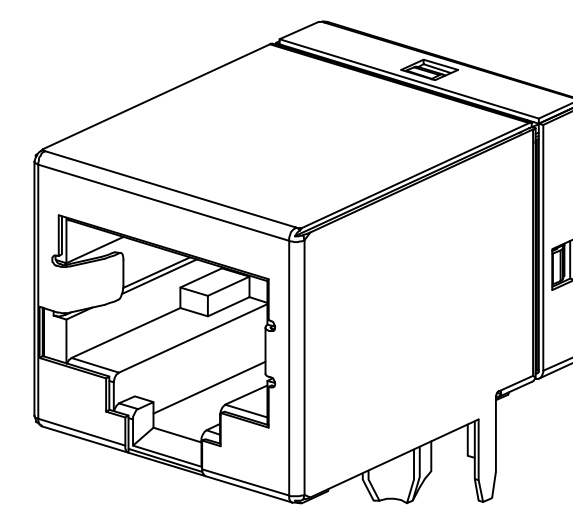

1. MATERIAL:HOUSING — PCT POLYESTER, BLACK, UL 94V-0, IR COMPATIBLE.
TERMINALS — 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27 μ m[.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81 μ m[.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27 μ m[.000050] MINIMUM THICK NICKEL UNDERPLATE.
SHIELD: .254mm[.010] THICK COPPER ALLOY PLATED WITH 2.03 μ m[.000080] MINIMUM BRIGHT TIN OVER 1.27 μ m[.000050] MINIMUM NICKEL.
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
3. ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
4. USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

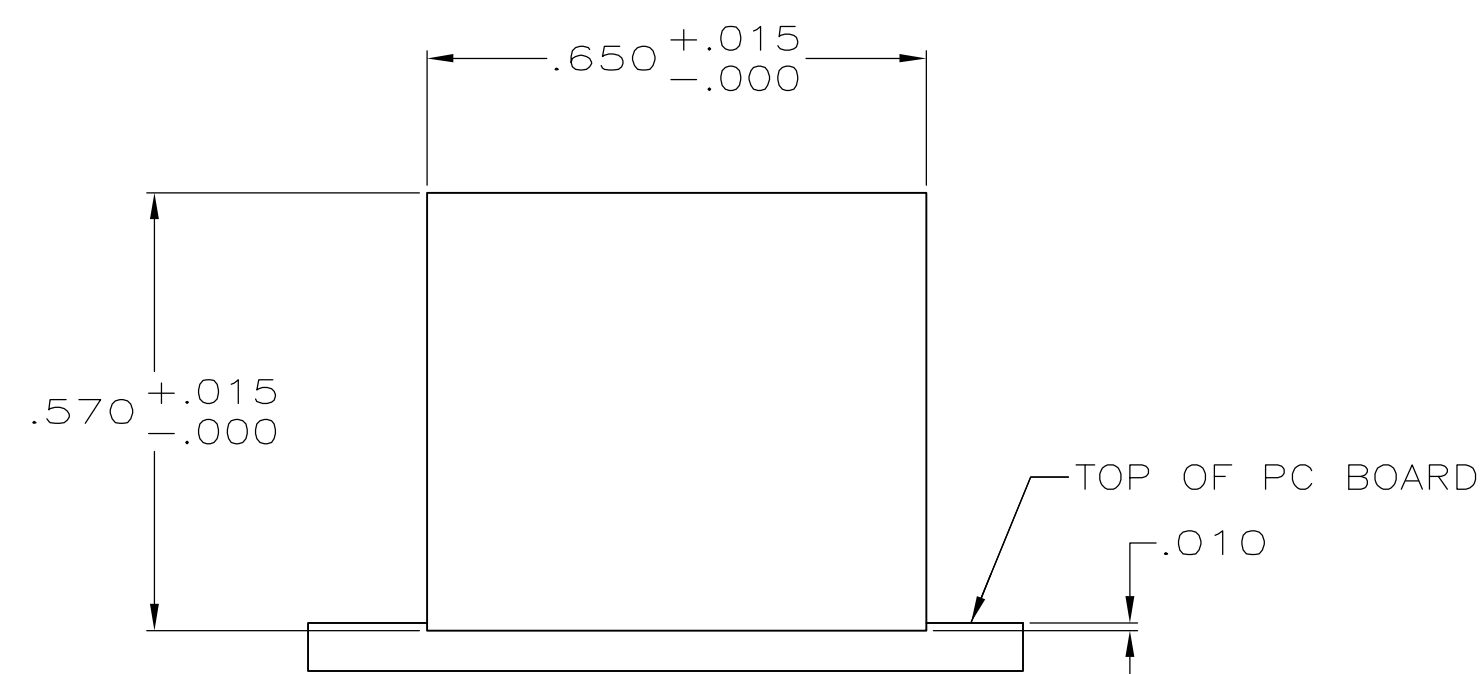

SUGGESTED PANEL CUTOUT

TRAY		2.54[.100±.010]		5557786-1	
PACKAGED		DIM Z		PART NUMBER	
QUANTITY:	DWN G. ATTADIA - DOCK5	15JUN2005	 Tyco Electronics Corporation Harrisburg, PA 17105-3608		
	CHK J. WESTMAN	15JUN2005			
	APVD S. FLICKINGER	15JUN2005			
	NAME				
UNLESS SPECIFIED:	PRODUCT SPEC		MODULAR JACK ASSEMBLY,		
25(.010)	108-1163		8 POSITION, RIGHT ANGLE, LOW PROFILE,		
± .005	APPLICATION SPEC		SHIELDED, PC BOARD GROUND		
	114-2048				
	WEIGHT -		SIZE GAGE CODE DRAWING NO		RESTRICTED TO
			A1 00779 C=5557786		-
CUSTOMER DRAWING			SCALE 4:1 SHEET 1 OF 1 REV A		