

Distributed by:







www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 968071

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		AS1	REVISED PER ECO-06-9350	4/26/06	SS	GS

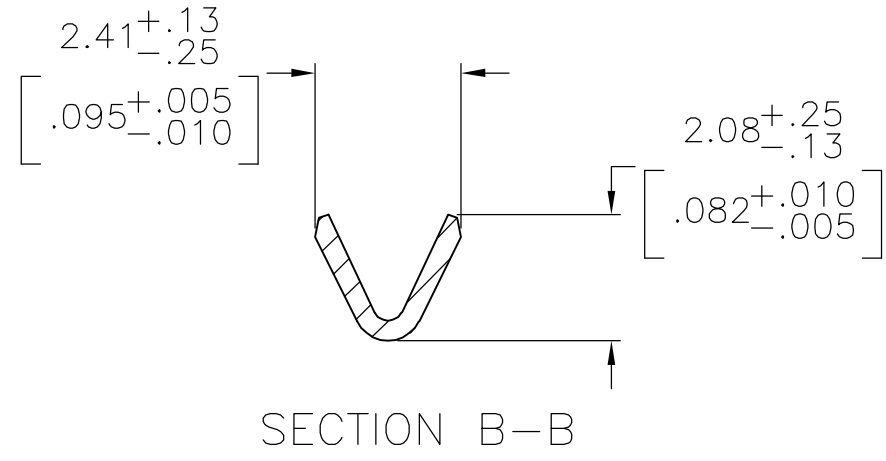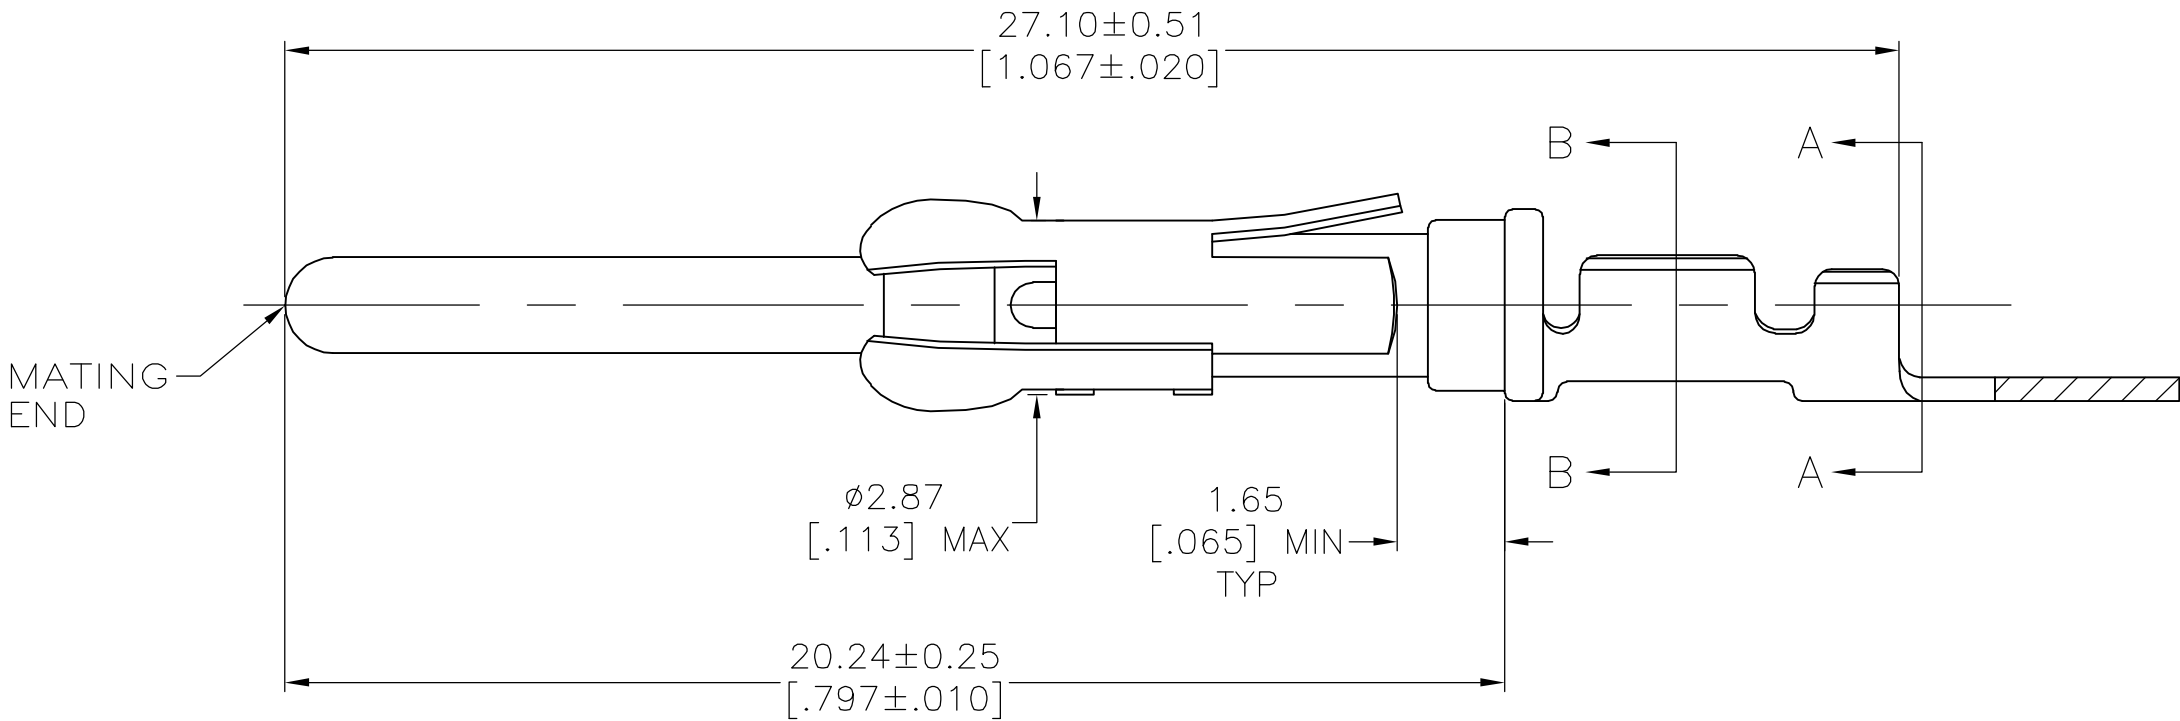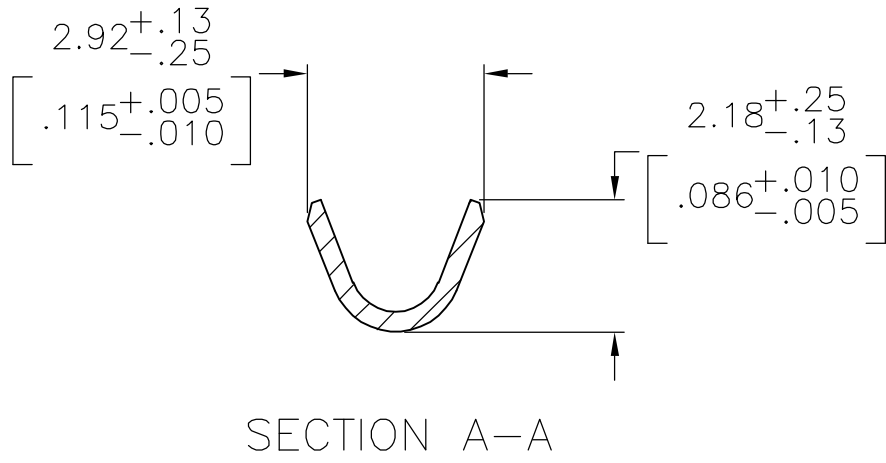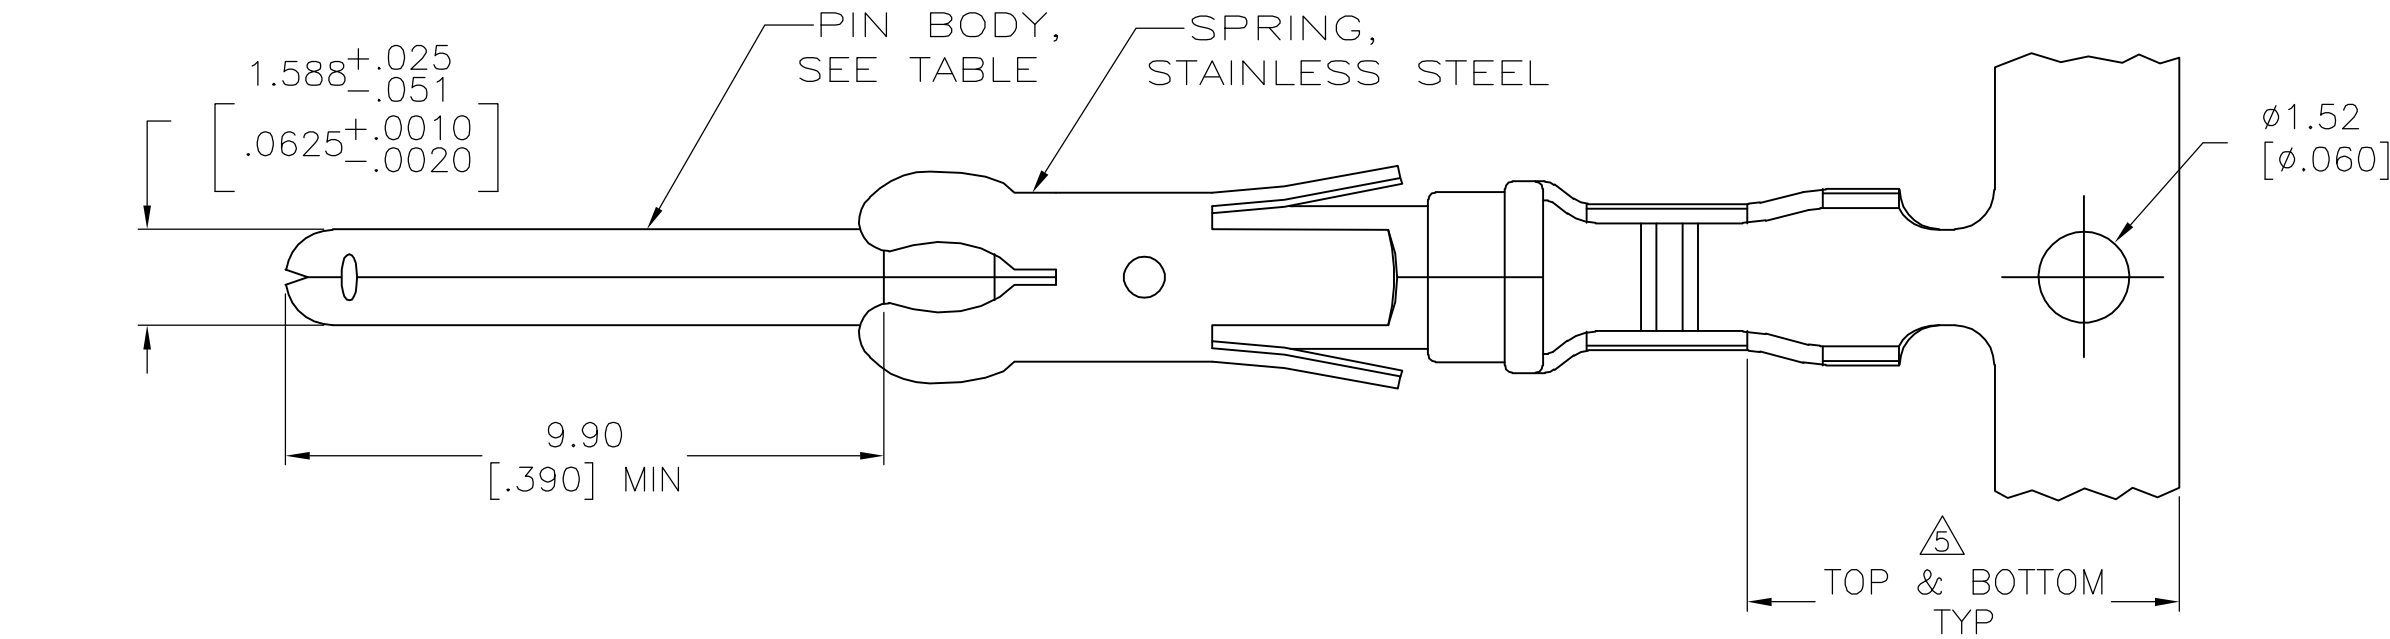

- 1 REVERSE REELED FOR MINI-APPLICATOR.
- 2 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER, OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 3 0.76µm [.000030] MIN GOLD PER MIL-G-45204 IN MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25µm [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER, OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 4 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 5 GOLD PLATING NEED NOT APPEAR IN THIS AREA.
- 6 1.27µm [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 1.90µm [.000075] MIN NICKEL PER QQ-N-290.
- 7 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
8. WIRE RANGE 24-20 AWG.
9. INSULATION RANGE 1.02[.040]-2.03[.080] DIA.
- 10 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 11 1.27µm [.000050] MIN TIN PER MIL-T-10727 OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 12 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.

	1	12	BRASS	-	2-66102-7
	STANDARD	11	BRASS	1-66103-8	2-66102-6
	1	11	BRASS	1-66103-8	2-66102-5
	1	10	BRASS	1-66103-3	2-66102-3
	1	2	PHOSPHOR BRONZE	1-66103-2	2-66102-2
OBSOLETE	1	7	PHOSPHOR BRONZE	1-66103-1	2-66102-1
OBSOLETE	1	6	BRASS	1-66103-0	1-66102-7
	1	2	BRASS	66103-4	66102-9
	1	4	BRASS	66103-3	66102-8
	1	7	BRASS	66103-2	66102-7
	1	3	BRASS	66103-1	66102-6
	STANDARD	2	BRASS	66103-4	66102-4
	STANDARD	4	BRASS	66103-3	66102-3
	STANDARD	7	BRASS	66103-2	66102-2
	STANDARD	3	BRASS	66103-1	66102-1
	REELING	PIN BODY FINISH	PIN BODY	LOOSE PIECE REF	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. FURLER CHK G. STEINHAUER APVD G. STEINHAUER PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	11JUL03 11JUL03 11JUL03	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PIN ASSEMBLY, .062, TYPE III+					
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		— — —					
MATERIAL SEE CALLOUTS		FINISH SEE TABLE		SIZE A2		CAGE CODE 00779	DRAWING NO C-66102		RESTRICTED TO —
CUSTOMER DRAWING				SCALE 8:1		SHEET 1 of 1		REV AS1	