




60X60X25mm




General Specifications

Airflow	15.8~40.1 CFM
Static Pressure	2.4~14.2 mm-H ₂ O
Blade	Plastic Material UL 94V-0 P.B.T.
Frame	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

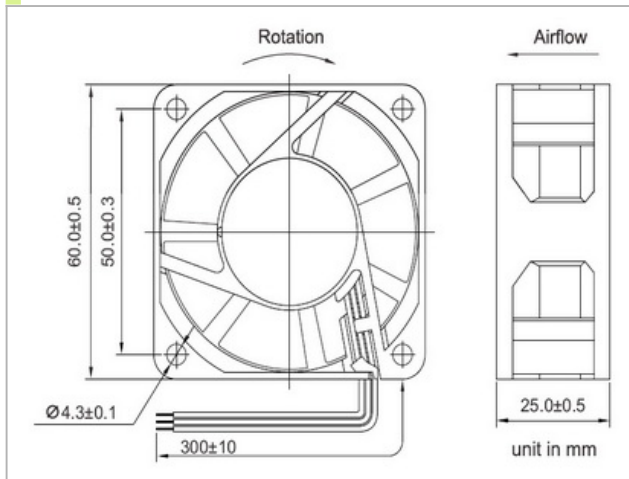

Performance

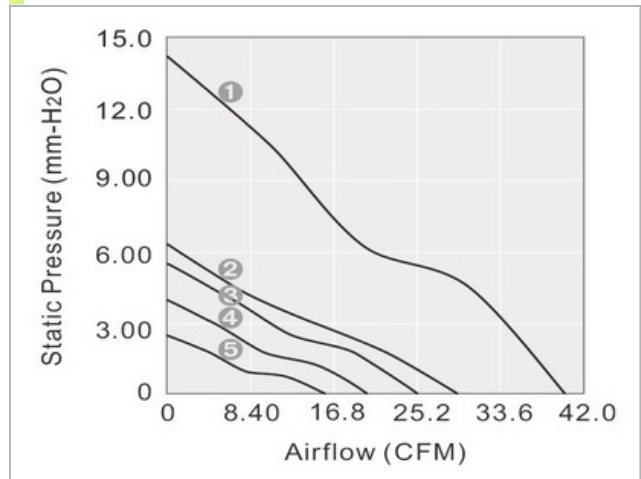

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD126025LB	2BALL	12	7~13.2	2800	15.8	2.4	80	0.96	80000	5	23.5	56
GD126025MB	2BALL	12	7~13.2	3700	20.0	3.8	120	1.44	80000	4	29.5	56
GD126025HB	2BALL	12	7~13.2	4300	25.4	5.5	150	1.80	75000	3	34.0	56
GD126025EB	2BALL	12	7~13.2	5200	29.3	6.3	210	2.52	65000	2	40.5	56
GD126025EB	2BALL	12	7~13.2	6800	40.1	14.2	330	3.96	65000	1	48.0	56
GD246025LB	2BALL	24	12~26.4	2800	15.8	2.4	50	1.20	80000	5	23.5	56
GD246025MB	2BALL	24	12~26.4	3700	20.0	3.8	70	1.68	80000	4	29.5	56
GD246025HB	2BALL	24	12~26.4	4300	25.4	5.5	90	2.16	75000	3	34.0	56
GD246025EB	2BALL	24	12~26.4	5200	29.3	6.3	110	2.64	65000	2	40.5	56
GD246025EB	2BALL	24	12~26.4	6800	40.1	14.2	210	5.04	65000	1	48.0	56
GD486025LB	2BALL	48	24~56.0	2800	15.8	2.4	30	1.44	80000	5	23.5	56
GD486025MB	2BALL	48	24~56.0	3700	20.0	3.8	45	2.16	80000	4	29.5	56
GD486025HB	2BALL	48	24~56.0	4300	25.4	5.5	50	2.40	75000	3	34.0	56
GD486025EB	2BALL	48	24~56.0	5200	29.3	6.3	80	3.84	65000	2	40.5	56