




Rating	6A 125VAC, 3A 250VAC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1minute		
Switch Function	2P SPST OFF-(ON)		

Date	Rev.	Description

Material :
 Frame : Copper Alloy, Cr-Plating
 Actuator : Black, ABS
 Terminals : Copper Alloy

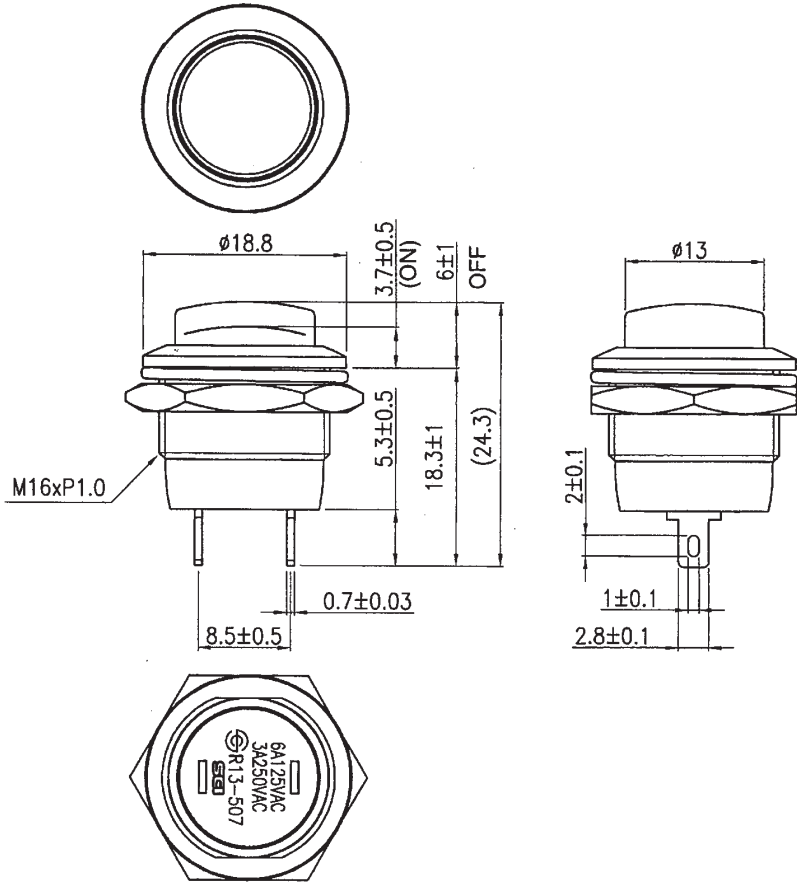

1、Tolerances ± 0.3 Unless Otherwise Specified

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2328263 Rev. 1

Description :

UNIT mm SCALE SHEET 1 OF 1 CAS No: ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

DCC. NO.
 A4 DRAWING NO.