


Numbers:

Model: LXW-5-1-2

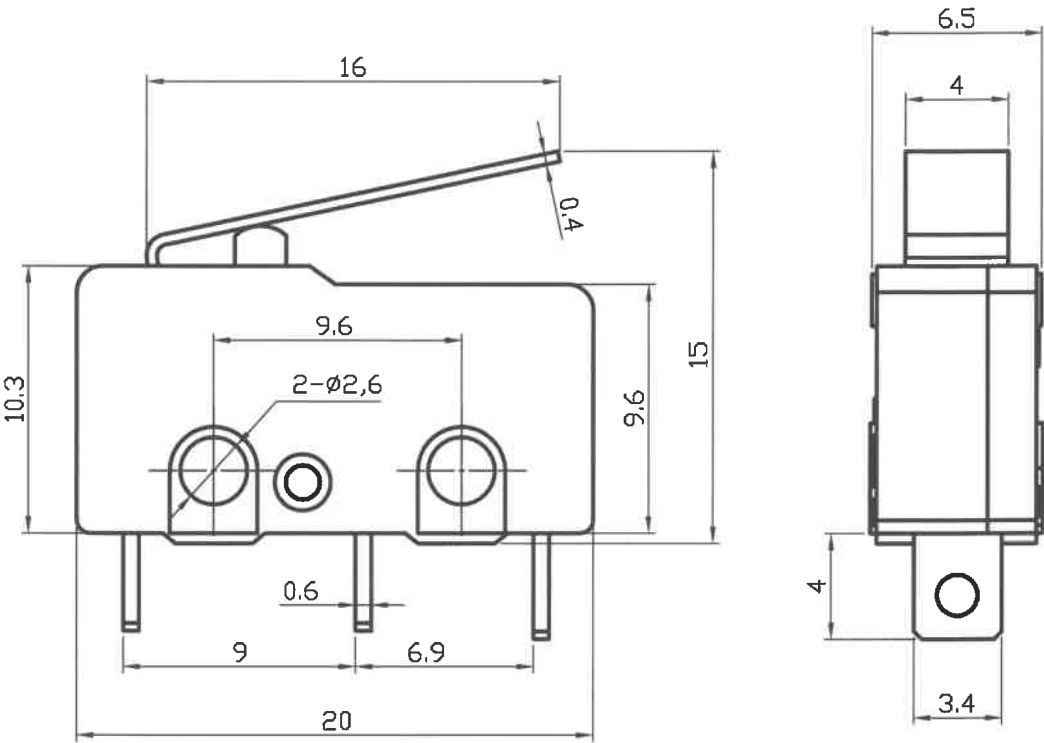

Technic Requirement:

- 1. Operating force:0.8-2.2N
pretravel:0.4-0.8mm
- 2. Plastic crust(T125), high button

Mark	Quantity	File NO.	Signature	Date
Design		Huang		
Check				

Outer structure
drawing

MicroSwitch LXW-5A

Drawing Mark	Quantity	Weight (Kg)	Comparison
			4:1
Pages In All:		Page:	

Prodcut name: micro-switch			product model: LXW-5-1-2		
Test basis: GB15092.1-2003			Customer:		
No.	Items		Specifications		
1	Outward appearance symbol		Does not have the big burr,The sign clear is easy to debate,Unmistakable		
2	Outer covering color		Black		
3	Pated parameter		250VAC 5A		
4	Terminal		3.4×0.6 Conversion		
5	Contact point Material		AgNi10 AgNi10/Cu		
6	Pretravel		0.4~0.8mm		
7	Operating Force		0.8~2.2N		
8	Release Force		≥0.3N		
9	Dielectric strength	Among Terminals	1000v/3s (5mA)		
		Between termina and outer covering	2000v/3s (5mA)		
10	Dielectric resistance		>100M Ω		
11	Contact resistance		≤30m Ω		
12	Heat resistance		150℃×4h,The switch does not have distorts greatly Still conformed to 2~8 standards		
13	The ball presses test		125℃×1h, Indentation diameter≤2mm		
14	The switch's flame-resistant		Vertical testing method FV-0 Level flame-resistant		
15	Bears leaks the mark index		PTI=175V, Endures51points 1%Ammonium chloride solution		
16	Authentication		CQC UL VDE TUV CB		
17	Life		According to the certification requirements		