
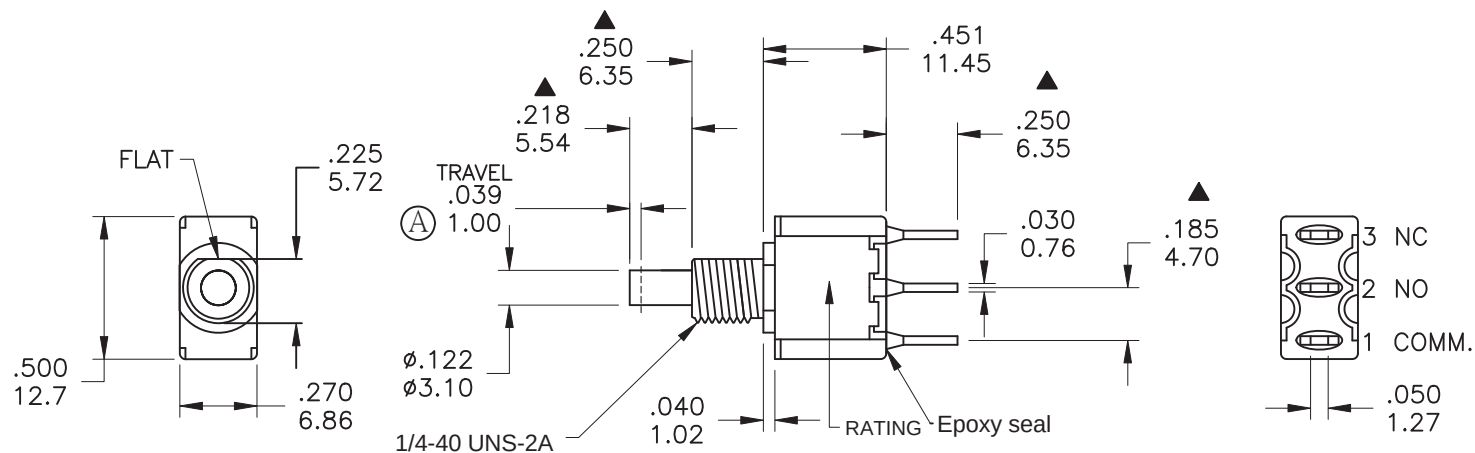


PANEL MOUNTING

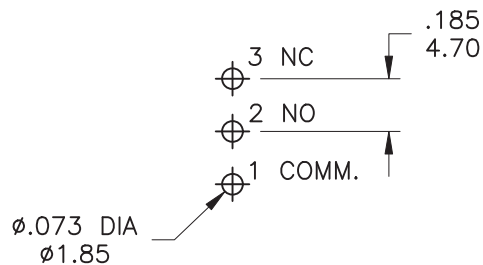

P.C.MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 50,000 make-and-break cycles.

CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

PLUNGER: Glass filled Nylon or Glass filled polyester (PBT).

BUSHING: Brass, nickel plated.

HOUSING: Stainless Steel.

TERMINAL/CONTACT: Brass.


RoHS & Lead Free

Model No.	POS.1	POS.2
7MS7	ON	(ON)
Term. Comm.	1-3	1-2
SCHEMATIC		

SWITCH FUNCTION

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	3 Amps @120 VAC or 28VDC
C	Gold over Silver	Gold over silver	1 Amps @250 VAC
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2		Snap-Acting Pushbutton Switches				
1	(A)	Travel,按鈕棒加註PBT,操作溫度-30℃ 修訂為-40℃		JUL-02-2020	TOLERANCE (公差) : 0.00mm±0.25mm 0.0mm±0.40mm ANGULAR: ±5° 7MSP0398		7MS7P1B11M2CES				inch mm
2	(B)						B		APR - 09 - 2008		1 of 1
3	(C)										
4	(D)										
5	(E)										
								CHECK 確認			FION

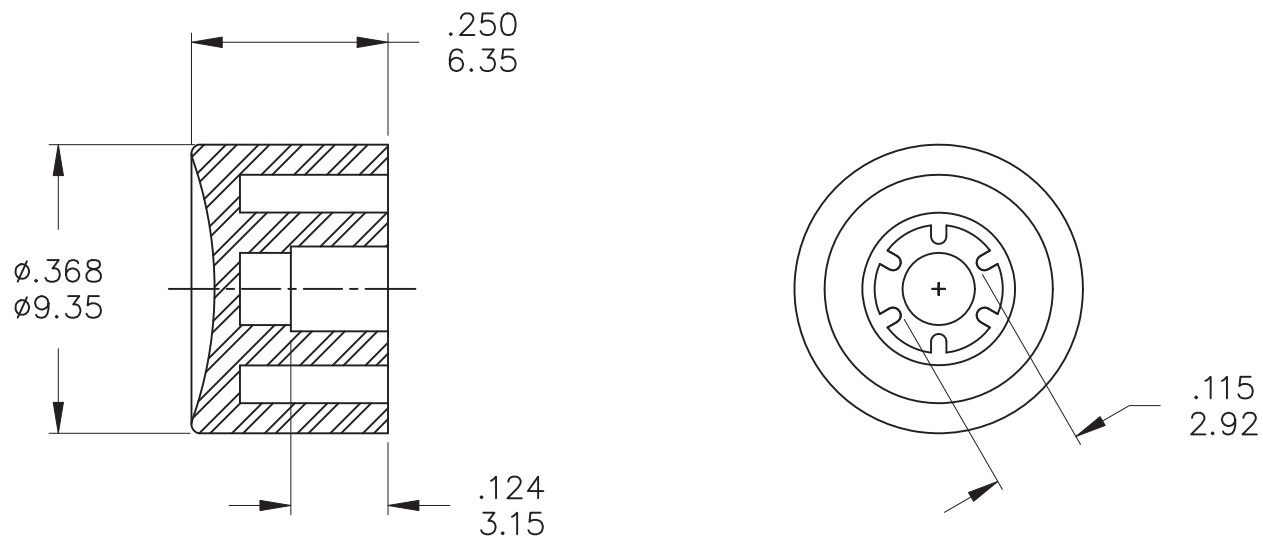

X = 1 = White (標準規格)
2 = Black (標準規格)
3 = Red (標準規格)
4 = Orange
5 = Yellow
6 = Green
7 = Blue
8 = Brown
9 = Gray

MATERIAL:ABS

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 4 : 1	CAP			
					TOLERANCE (公差) : 0.00 mm ± 0.25mm		FCP-7C2X		
1	Ⓐ				CP0080		A		SEP - 09 - 2016
2	Ⓑ								1 of 1
3	Ⓒ								
4	Ⓓ						陳燈財		IRENE
5	Ⓔ								