


LAK Axial, General Purpose, 105°C

Specifications

Item	Performance Characteristics														
Operating Temperature Range	-40 to +105°C								-25 to +105°C						
Rated voltage Range	10 to 100 VDC								160 to 450 VDC						
Capacitance Tolerance	±20%(120Hz, +20°C)														
Leakage Current(at 20°C)	10V ~100V DC								160V~450V DC						
	I≤0.02CV+3(μA)								I≤0.05CV+4(μA)						
	I: Leakage current(μA) C: Rated Capacitance(μF) V: Working Voltage[V] After 5 minutes applying the DC working voltage														
Surge Voltage(20°C)	W.V.	10	16	25	35	50	60	100	160	160	200	250	350	400	450
	S.V.	13	20	32	44	63	79	125	200	200	250	300	400	450	500
Dissipation Factor (120Hz,20 °C)	W.V.	10	16	25	35	50	63	100	160	200	250	350	400	450	
	Tanδ	0.20	0.17	0.15	0.12	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.24	0.24	
	For capacitance exceeding 1000μF,add 0.02 Per increment of 1000μF														
Temperature Characteristics (Tanδ)	W.V.	10	16	25	35	50	63	100	160	200	250	350	400	450	
	Impedance	-25 °C/+20 °C	4	3	3	2	2	2	2	8	8	8	12	15	16
	Ratio	-40 °C/+20 °C	8	6	4	3	3	3	3	6	6	10	-	-	-
Impedance ratio of 120Hz															
Load Test	After 1000 hours application of W.V. AT+105 °C The capacitor shall meet the following limits.														
	Capacitance Change								≤±20% of initial value						
	Tanδ								≤±200% of initial specified value						
	Leakage Current								≤±initial specified value						
Shelf Test	After 500 hours application of W.V. AT+105 °C The capacitor shall meet the following limits.														
	Capacitance Change								≤±20% of initial value						
	Tanδ								≤±200% of initial specified value						
	Leakage Current								≤±200% of initial specified value						

Diagram of Dimensions: (Unit: mm)

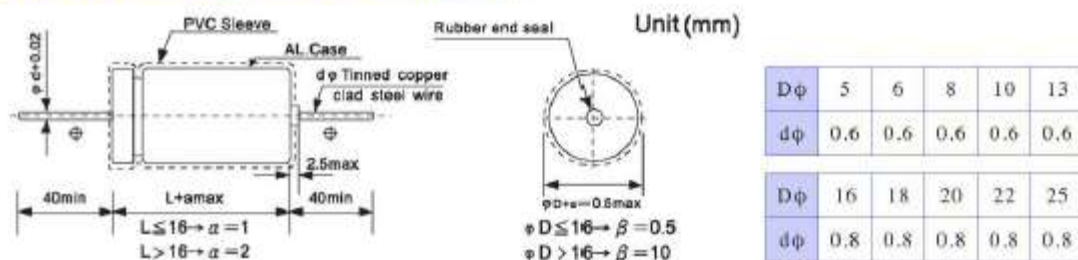



Up to 60% Off | 30-Day Money Back Guarantee | One-year Warranty
 Jameco's ValuePro products are brand name quality at significant price savings.
 1-800-831-4242 | www.Jameco.com

LAK Axial, General Purpose, 105°C

Ripple Current & Frequency Multipliers

Freq.(Hz) Cap.(μF)	50(60)	120	500	1K	10K UP
Under 100	0.70	1.00	1.30	1.40	1.50
100<C≤1000	0.75	1.00	1.20	1.30	1.35
1000 up above	0.80	1.00	1.10	1.12	1.15

Case Size

φD x L (mm)

W.V. μF	10		16		25		35		50	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	—						→		6x13	8
1	—						→		6x13	12
2.2	—						→		6x13	18
3.3	—						→		6x13	23
4.7	—						→		6x13	27
10	—		→		6x13	40	6x13	40	6x13	40
22	—		→		6x13	48	6x13	59	6x13	62
33	→		6x13	58	6x13	65	6x13	69	8x16	88
47	6x13	60	6x13	73	6x13	77	6x13	105	8x16	115
100	8x16	98	6x16	102	8x16	140	8x16	205	8x16	252
220	8x16	170	8x16	220	8x16	260	8x16	305	10x20	320
330	8x16	243	8x16	250	10x21	320	10x21	350	13x22	415
470	8x16	315	10x17	385	10x21	420	13x22	530	13x26	640
1000	10x21	480	13x22	615	13x26	760	13x26	820	16x33	955
2200	13x22	940	13x26	1000	16x28	1050	16x36	1165	18x36	1680
3300	13x26	1150	16x33	1340	16x36	1500	18x36	1800	22x42	2080
4700	16x28	1400	16x36	1580	18x36	1980	22x42	2100		

•Ripple Current (mA, rms) at 105°C 120Hz



Up to 60% Off | 30-Day Money Back Guarantee | One-year Warranty
 Jameco's ValuePro products are brand name quality at significant price savings.
 1-800-831-4242 | www.Jameco.com

LAK Axial, General Purpose, 105°C

Case Size		$\phi D \times L$ (mm)									
μF	W.V.	63		100		160		200		250	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47		6x13	8	6x13	10	6x13	10	6x13	10	6x13	10
1		6x13	12	6x13	14	6x13	10	6x16	10	6x16	11
2.2		6x13	20	6x13	22	8x16	16	8x16	16	8x16	21
3.3		6x13	24	6x13	27	8x16	26	10x17	26	10x17	26
4.7		6x13	29	6x13	34	8x16	36	10x17	38	10x17	40
10		6x13	48	8x16	58	10x21	60	10x21	68	10x21	78
22		6x13	81	8x20	100	13x22	82	13x22	92	13x27	92
33		8x16	99	8x20	135	13x22	105	16x28	116	16x33	116
47		8x16	138	10x21	150	16x28	175	16x33	238	16x33	238
100		10x21	280	13x22	300	16x33	410	18x36	460	18x36	460
220		13x22	394	16x28	505	22x42	515	22x42	585	-	-
330		13x26	505	16x33	660	-	-	-	-	-	-
470		16x26	715	18x36	875	-	-	-	-	-	-
1000		16x36	1150	-	-	-	-	-	-	-	-
2200		22x42	1980	-	-	-	-	-	-	-	-

•Ripple Current (mA, rms) at 105°C 120Hz

μF	W.V.	350		400		450	
		Size	Ripple	Size	Ripple	Size	Ripple
0.47		6x13	10	6x16	10	6x16	10
1		8x16	11	8x16	13	8x16	13
2.2		10x17	26	10x17	32	10x17	32
3.3		10x17	30	10x21	33	10x21	33
4.7		10x21	49	13x22	52	13x22	52
10		13x22	84	13x24	86	16x28	90
22		16x33	86	16x33	86	16x33	91
33		16x36	116	18x36	135	-	-
47		16x36	238	-	-	-	-

•Ripple Current (mA, rms) at 105°C 120Hz